


# Compressed Air



## T903LE Series 150 PSI High Quality FDA Hot Air Blower Hose

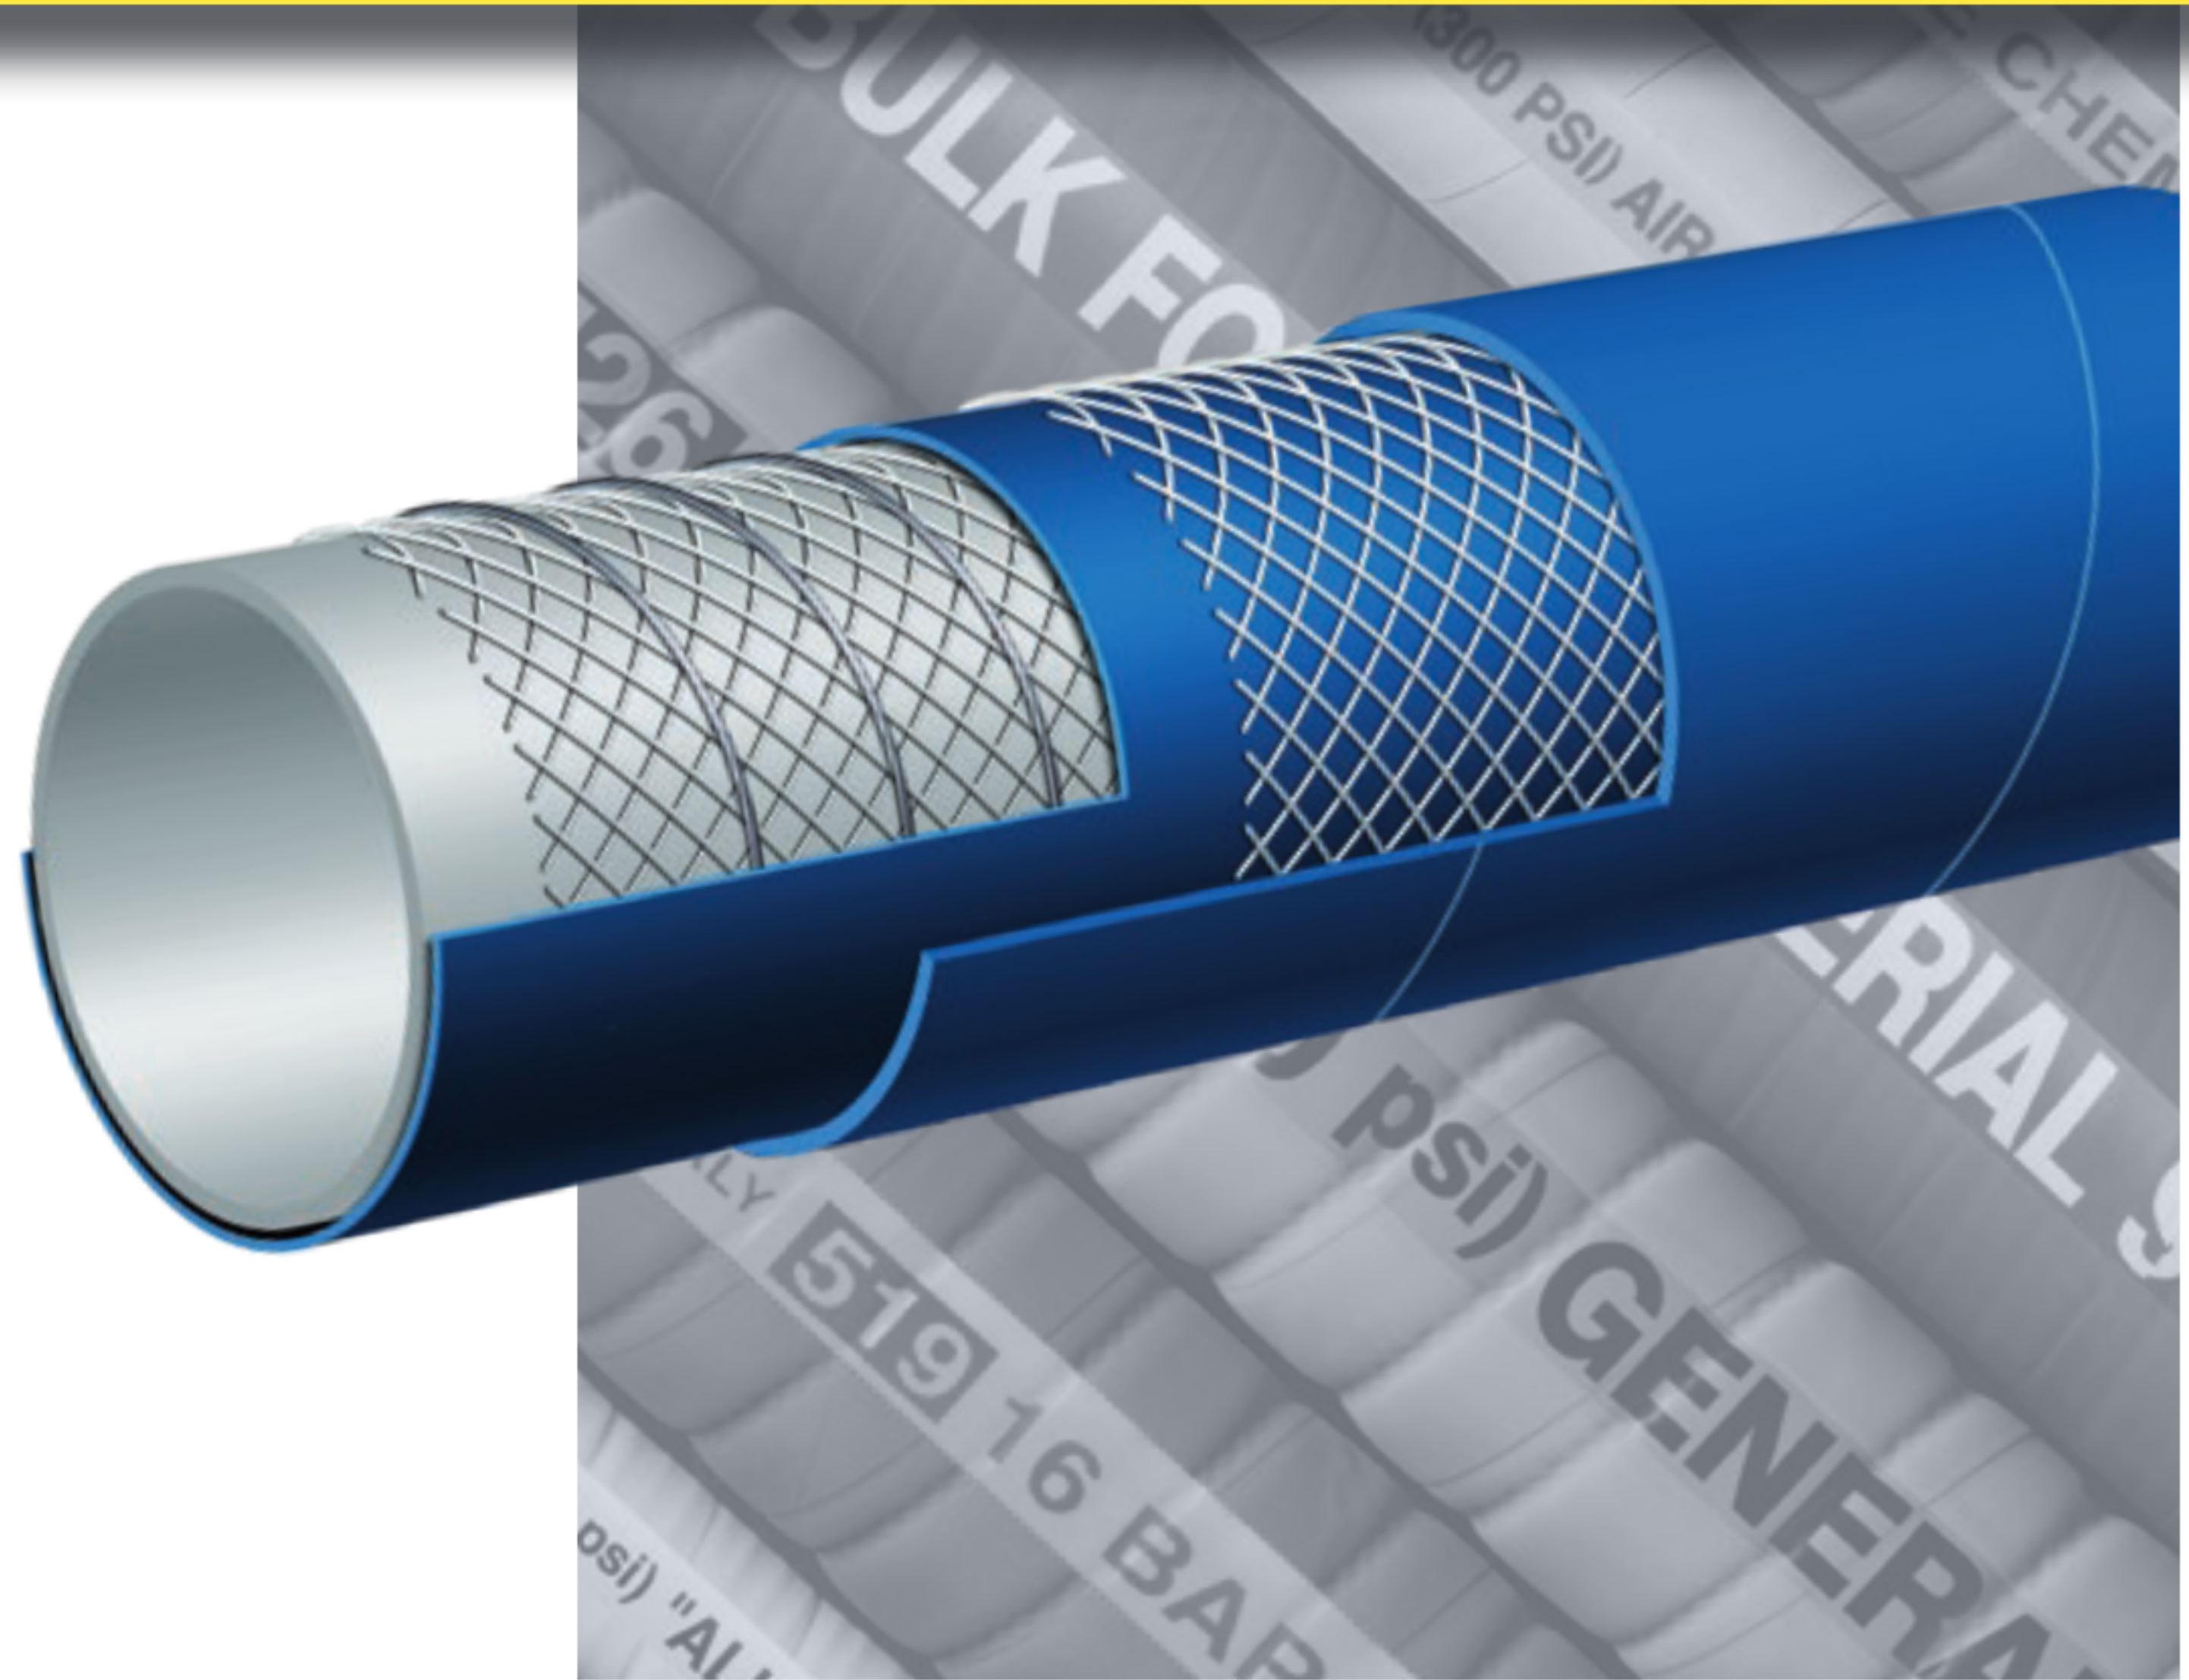

### General Applications:

Hot air transfer between the air compressor and dry bulk tank on bulk material carriers.

### Construction:

**Tube:** White EPDM – heat-resistant. Meets FDA requirements.

**Reinforcement:** Spiraled high tensile textile cords with flexible steel helix wire.

**Cover:** Blue EPDM – heat, abrasion and ozone resistant.

### Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

### Service Temperature Range:

-40°F (-40°C) to +356°F (+180°C)

### Branding:

ALFAGOMMA – ITALY T903 10 BAR (150 PSI) – HOT AIR SERVICE – FDA (in white letters)

## Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T903LE300	3	76	3.54	90	150	27	9	100	1.65
T903LE400	4	102	4.57	116	150	27	12	100	2.26

### COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.