


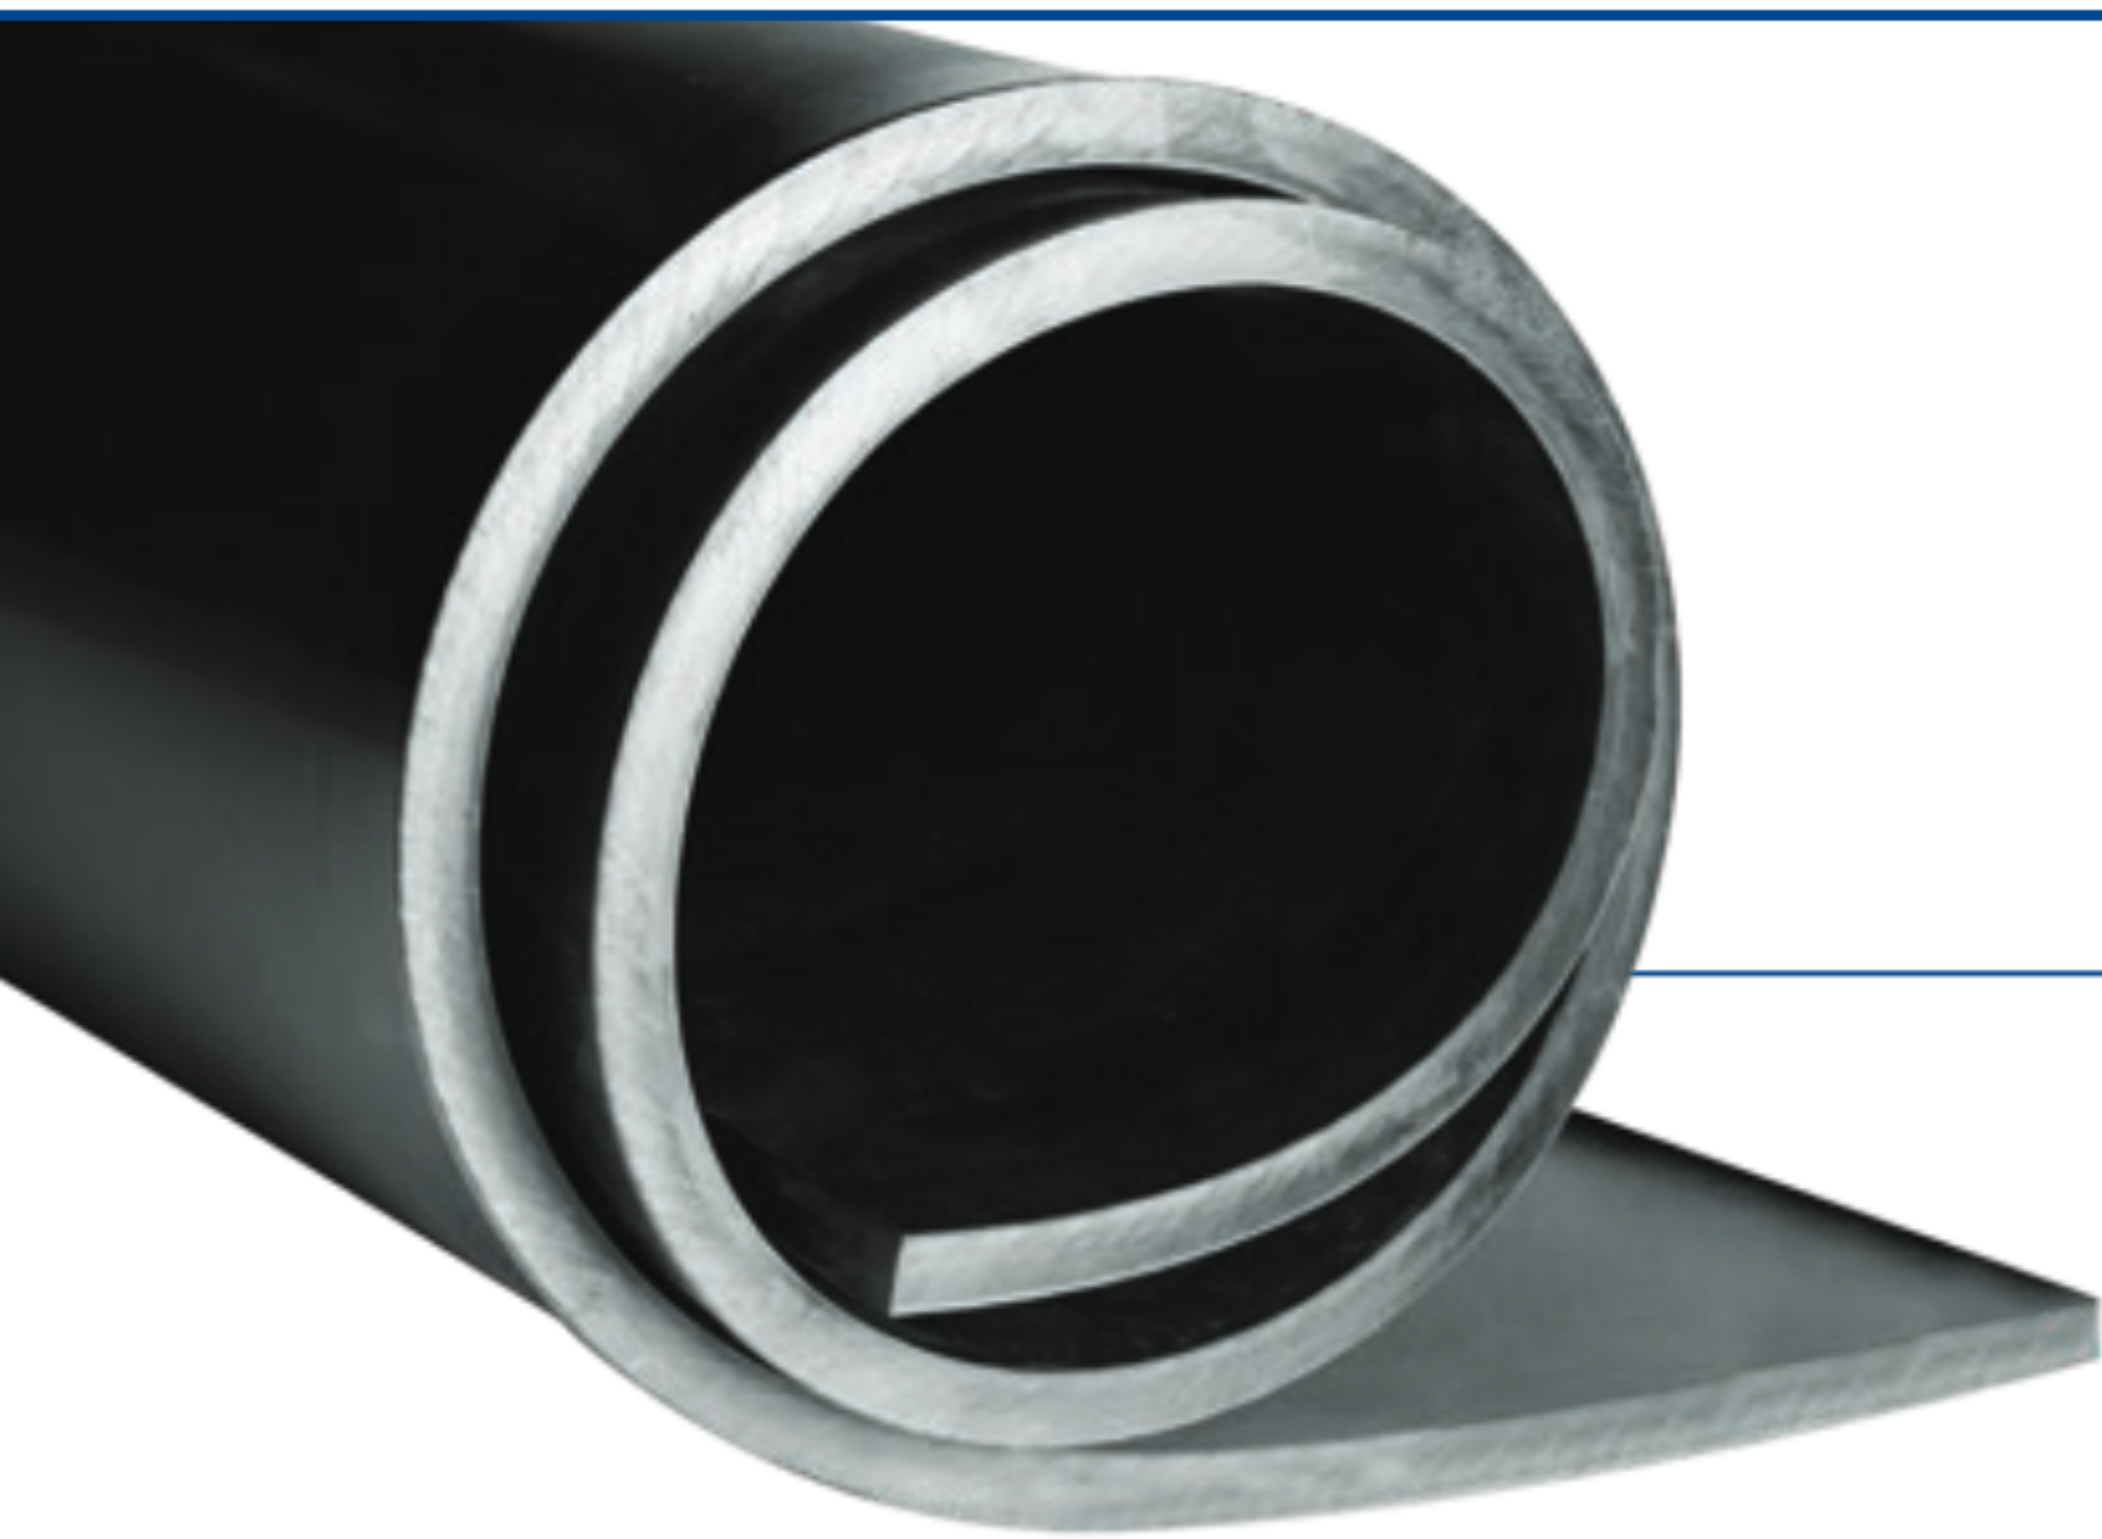

BLAST®

AB-139 BLAST® (Natural Rubber)

Black Sheet

GENERAL PROPERTIES

- Specifically designed for ballistic applications
- Ideal for all types of ranges, curtain or wall applications
- Has self-healing qualities
- Less airborne lead dust & diminishes dangerous ricochet

POLYMER

Natural Rubber (NR)

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/AB-139](https://koi.link/AB-139)

Series	ASTM Specification (SI units)	Temperature Range	Specific Gravity (gr/cc)	Durometer	Tensile Strength (psi)	Elongation (%)
AB-139	D2000 : 2AA420A13F17	-20° to 180°F (-29° to 82°C)	1.14	40	2000 min. 2500 typical	400 min. 700 typical

ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.

ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	Yes
Color	Black

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft./Roll)	Surface (sft)	Approx. Lbs./Roll
141-08-482	1/8 x 48	40	160	136
141-16-482	1/4 x 48	40	160	236

Maximum pieces per roll: 2 • Minimum piece length: 10'
 Width tolerance: -0 / +1"
 Material is within commercial sheet rubber gauge tolerances.
 The documentation for sheet rubber gauge tolerances is published on our website.
 Typical values do not constitute a specification.
 Please ensure the product meets your application specification prior to order placement.
 Specifications are subject to change without notice. The website version prevails.
 Total roll length may vary by ±10% for domestically manufactured (AB-139 BLAST) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.