


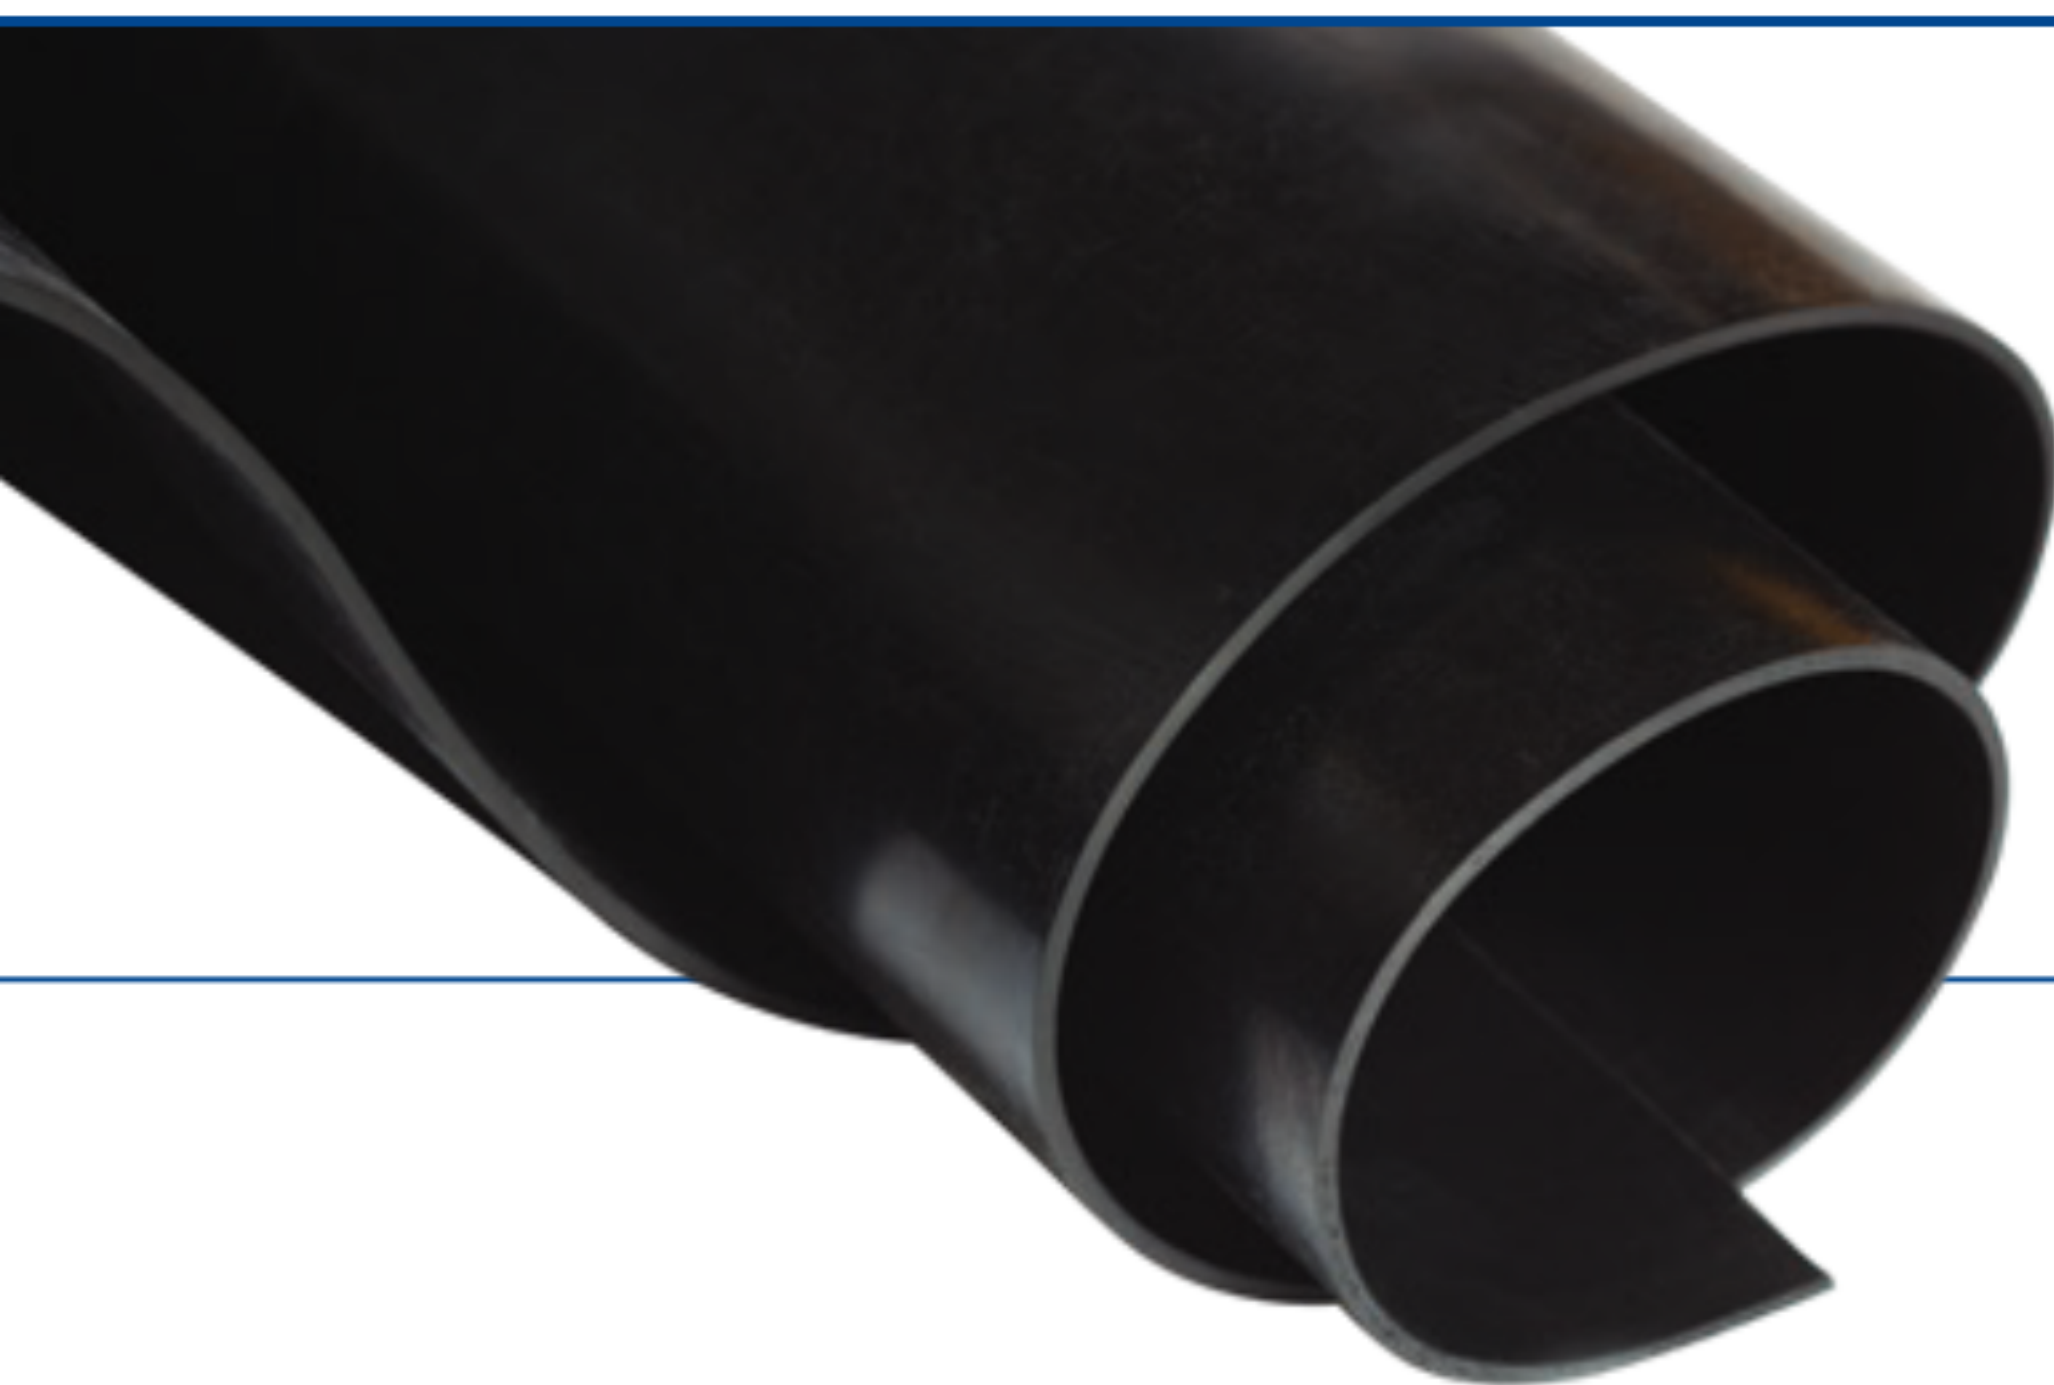

AB-160 DURASHIELD®

(Natural Rubber)

Premium Black Sheet & Skirtboard

GENERAL PROPERTIES

- AB-160 is a black version, compounded with added carbon black for maximum tear/abrasion resistance
- Ideal for use in mining and aggregates

POLYMER

Natural Rubber (NR)



View Up To Date Info



◀ SCAN OR VISIT
KOA.link/AB-160

Series	ASTM Specification (SI units)	Temperature Range	Specific Gravity (gr/cc)	Durometer	Tensile Strength (psi)	Elongation (%)	Tear (lbs/in)
AB-160	D2000 : 4AA630A13F17Z1	-40° to 180°F (-40° to 82°C)	1.15	65 +/- 5	3000 min. 3300 typical	400 min.	500 typical

ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 DIN	Abrasion Method 5351	Wet: 20 mm ³ Dry: 150 mm ³
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +10 Tensile (%): -25 max. Elongation (%): -25 max.

ADDITIONAL SPECIFICATIONS

Grade	Premium
Finish	Smooth
Powder	No
Color	Black

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft./Roll)	Surface (sft)	Approx. Lbs./Roll
138-08-482*	1/8 x 48	50	200	158
138-12-482*	3/16 x 48	50	200	237
138-16-044	1/4 x 4	50	--	24
138-16-064	1/4 x 6	50	--	35
138-16-084	1/4 x 8	50	--	49
138-16-482*	1/4 x 48	50	200	299
138-24-044	3/8 x 4	50	--	36
138-24-064	3/8 x 6	50	--	55
138-24-084	3/8 x 8	50	--	73
138-24-482*	3/8 x 48	50	200	442
138-32-044	1/2 x 4	50	--	51
138-32-064	1/2 x 6	50	--	77
138-32-084	1/2 x 8	50	--	103
138-32-104	1/2 x 10	50	--	129
138-32-124	1/2 x 12	50	--	155
138-32-482	1/2 x 48	50	200	620

*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 1 • Width tolerance: -0 / +1" • Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website. Typical values do not constitute a specification. Please ensure the product meets your application specification prior to order placement. Specifications are subject to change without notice. The website version prevails.

Total roll length may vary by ±10% for domestically manufactured (AB-160 DURASHIELD) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.