


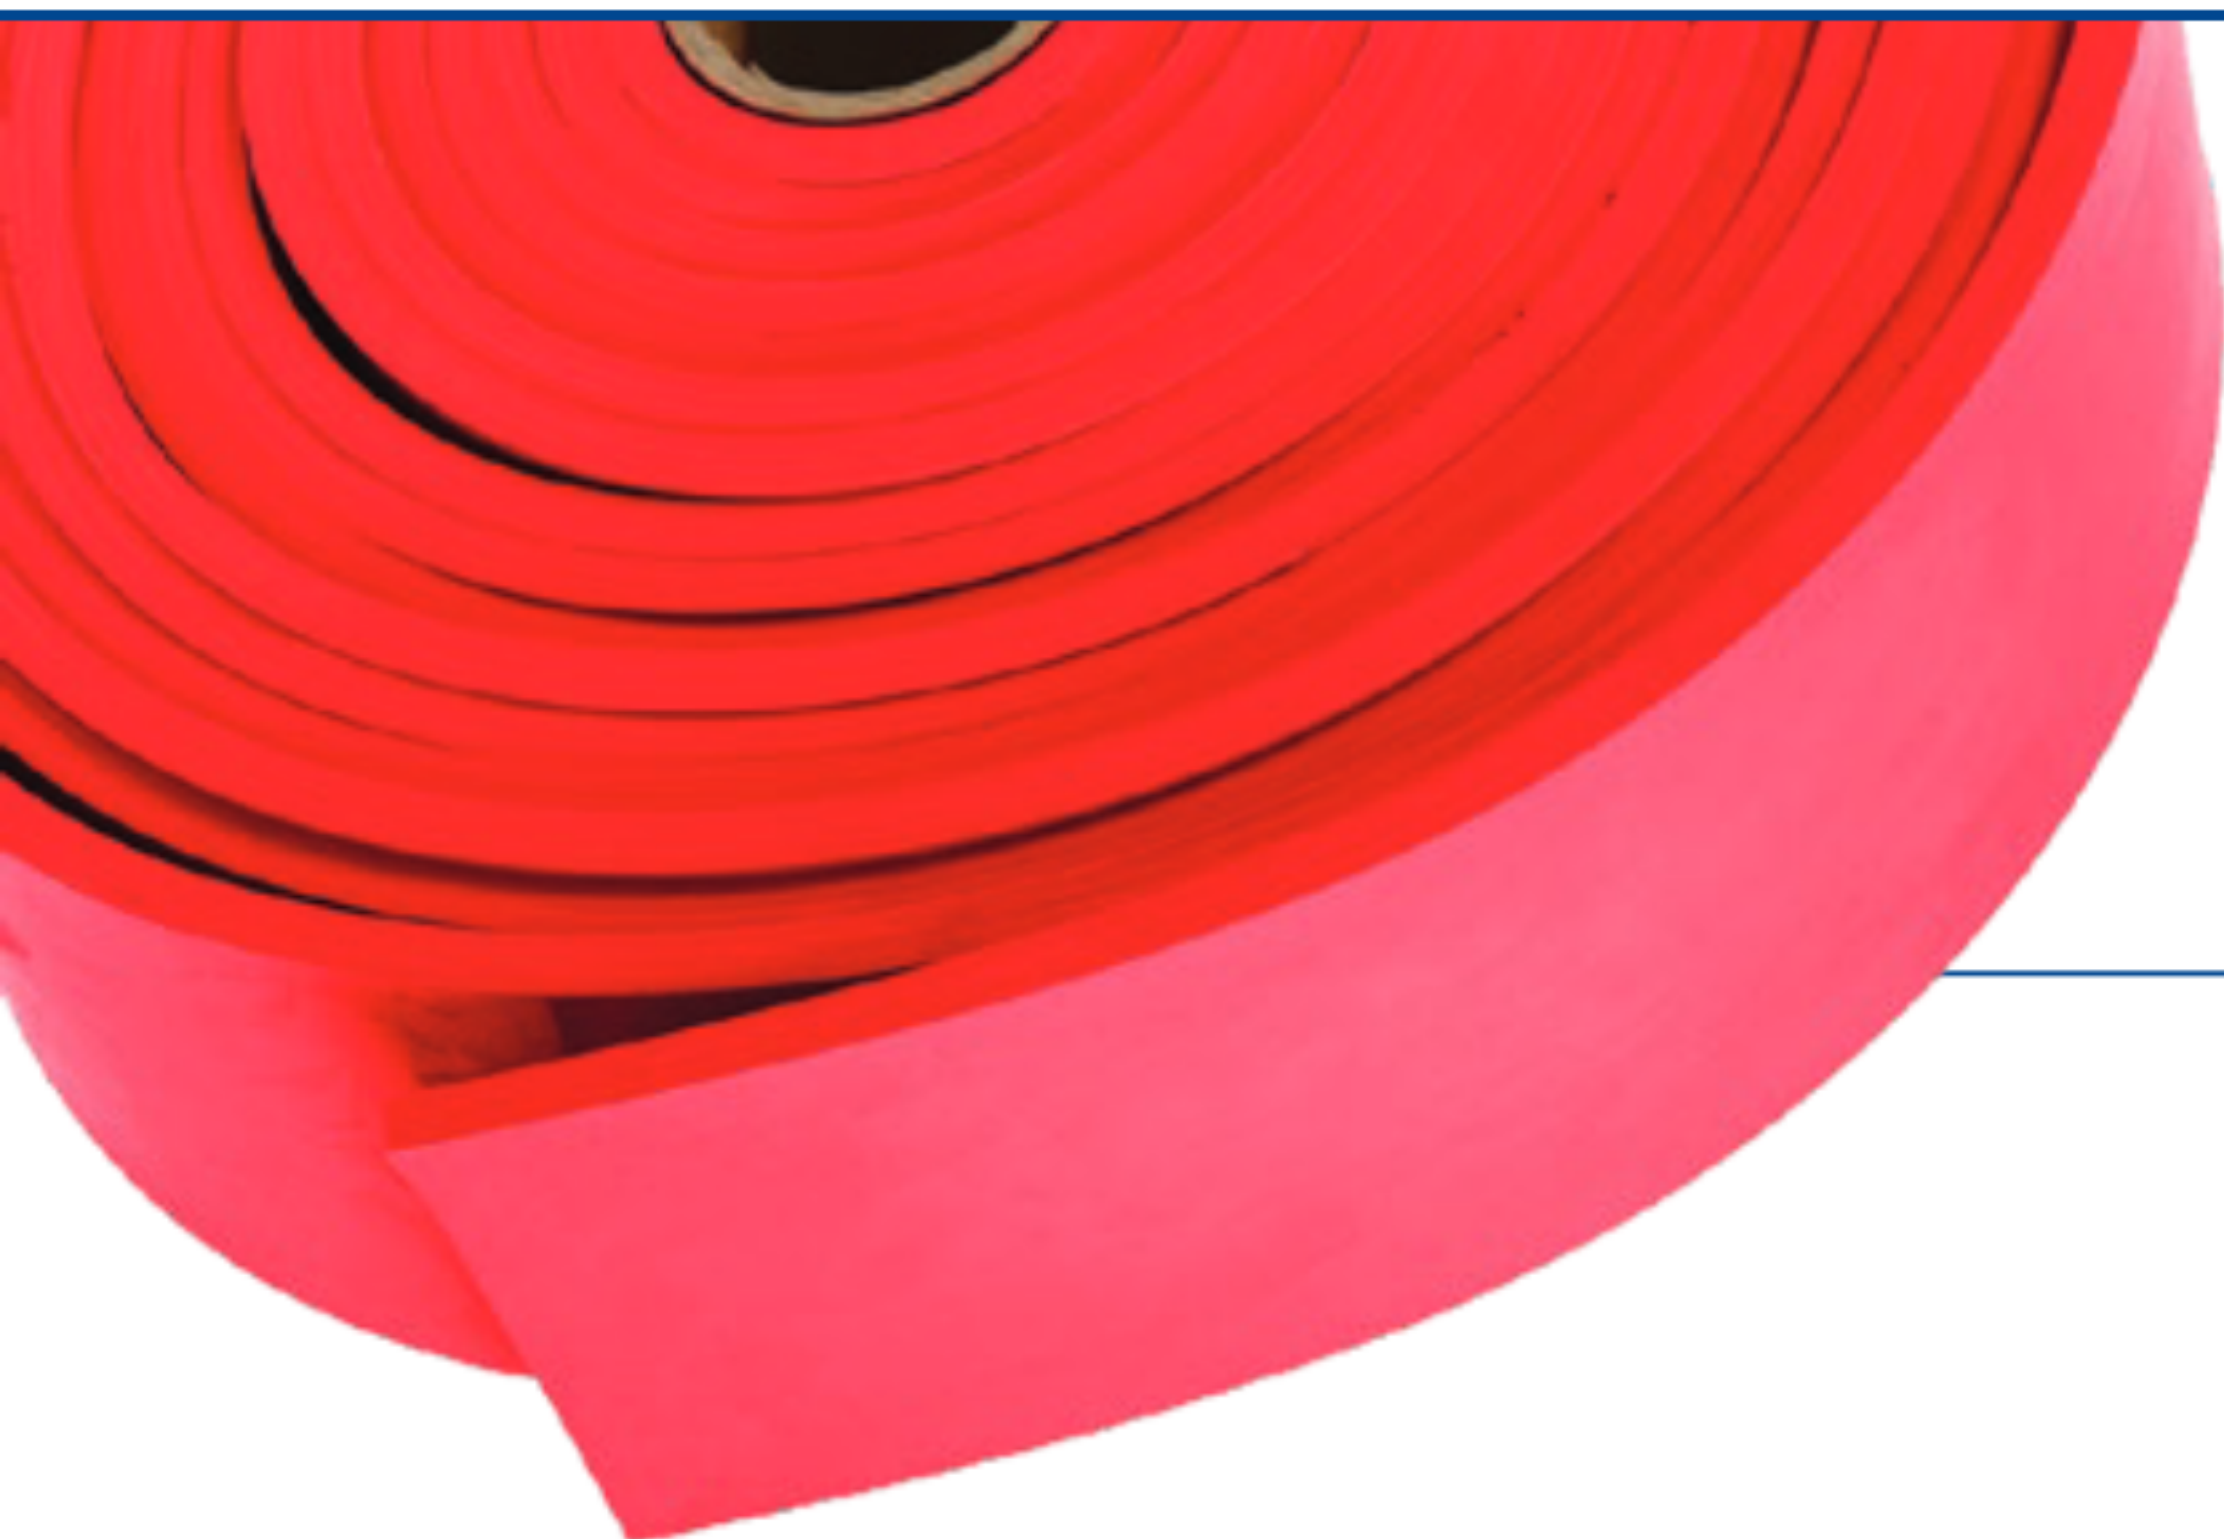

AB-140 SKIRT-SHIELD® (Natural Rubber) Premium Red Skirtboard

GENERAL PROPERTIES

- High tear resistance
- Flexible
- Same premium AB-140 DURASHIELD® compound, supplied in cut-to-width sizes.

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
AB-140-S](https://KOA.link/AB-140-S)

POLYMER

Natural Rubber (NR)



Series	ASTM Specification (SI units)	Temperature Range	Specific Gravity (gr/cc)	Durometer	Tensile Strength (psi)	Elongation (%)	Tear (lbs/in)
AB-140	D2000 : 4AA430A13B13F17	-40° to 180°F (-40° to 82°C)	1.06	40	3000 min. 3100 typical	600 min. 750 typical	350 typical

ASTM D2000 SPECIFICATION AND TESTS

	ASTM	Description	Value
	DIN	Abrasion Method 53516	Wet: 40 mm ³ Dry: 160 mm ³
	D2137	Cold Temperature	-40°C/°F min.
	D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	25% max.
	D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +10 Tensile (%): -25 max. Elongation (%): -25 max.

ADDITIONAL SPECIFICATIONS

Grade	Premium
Finish	Smooth
Powder	No
Color	Red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft./Roll)	Surface (sft)	Approx. Lbs./Roll
132-16-044	1/4 x 4	50	--	23
132-16-064	1/4 x 6	50	--	34
132-16-084	1/4 x 8	50	--	47
132-24-044	3/8 x 4	50	--	51
132-24-064	3/8 x 6	50	--	51
132-24-084	3/8 x 8	50	--	68
132-32-044	1/2 x 4	50	--	45
132-32-064	1/2 x 6	50	--	68
132-32-084	1/2 x 8	50	--	91
132-32-104	1/2 x 10	50	--	116
132-32-124	1/2 x 12	50	--	136

Material is within commercial sheet rubber gauge tolerances.
The documentation for sheet rubber gauge tolerances is published on our website.
Typical values do not constitute a specification.
Please ensure the product meets your application specification prior to order placement.
Specifications are subject to change without notice. The website version prevails.
Total roll length may vary by ±10% for domestically manufactured (AB-140 SKIRT-SHIELD) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.