


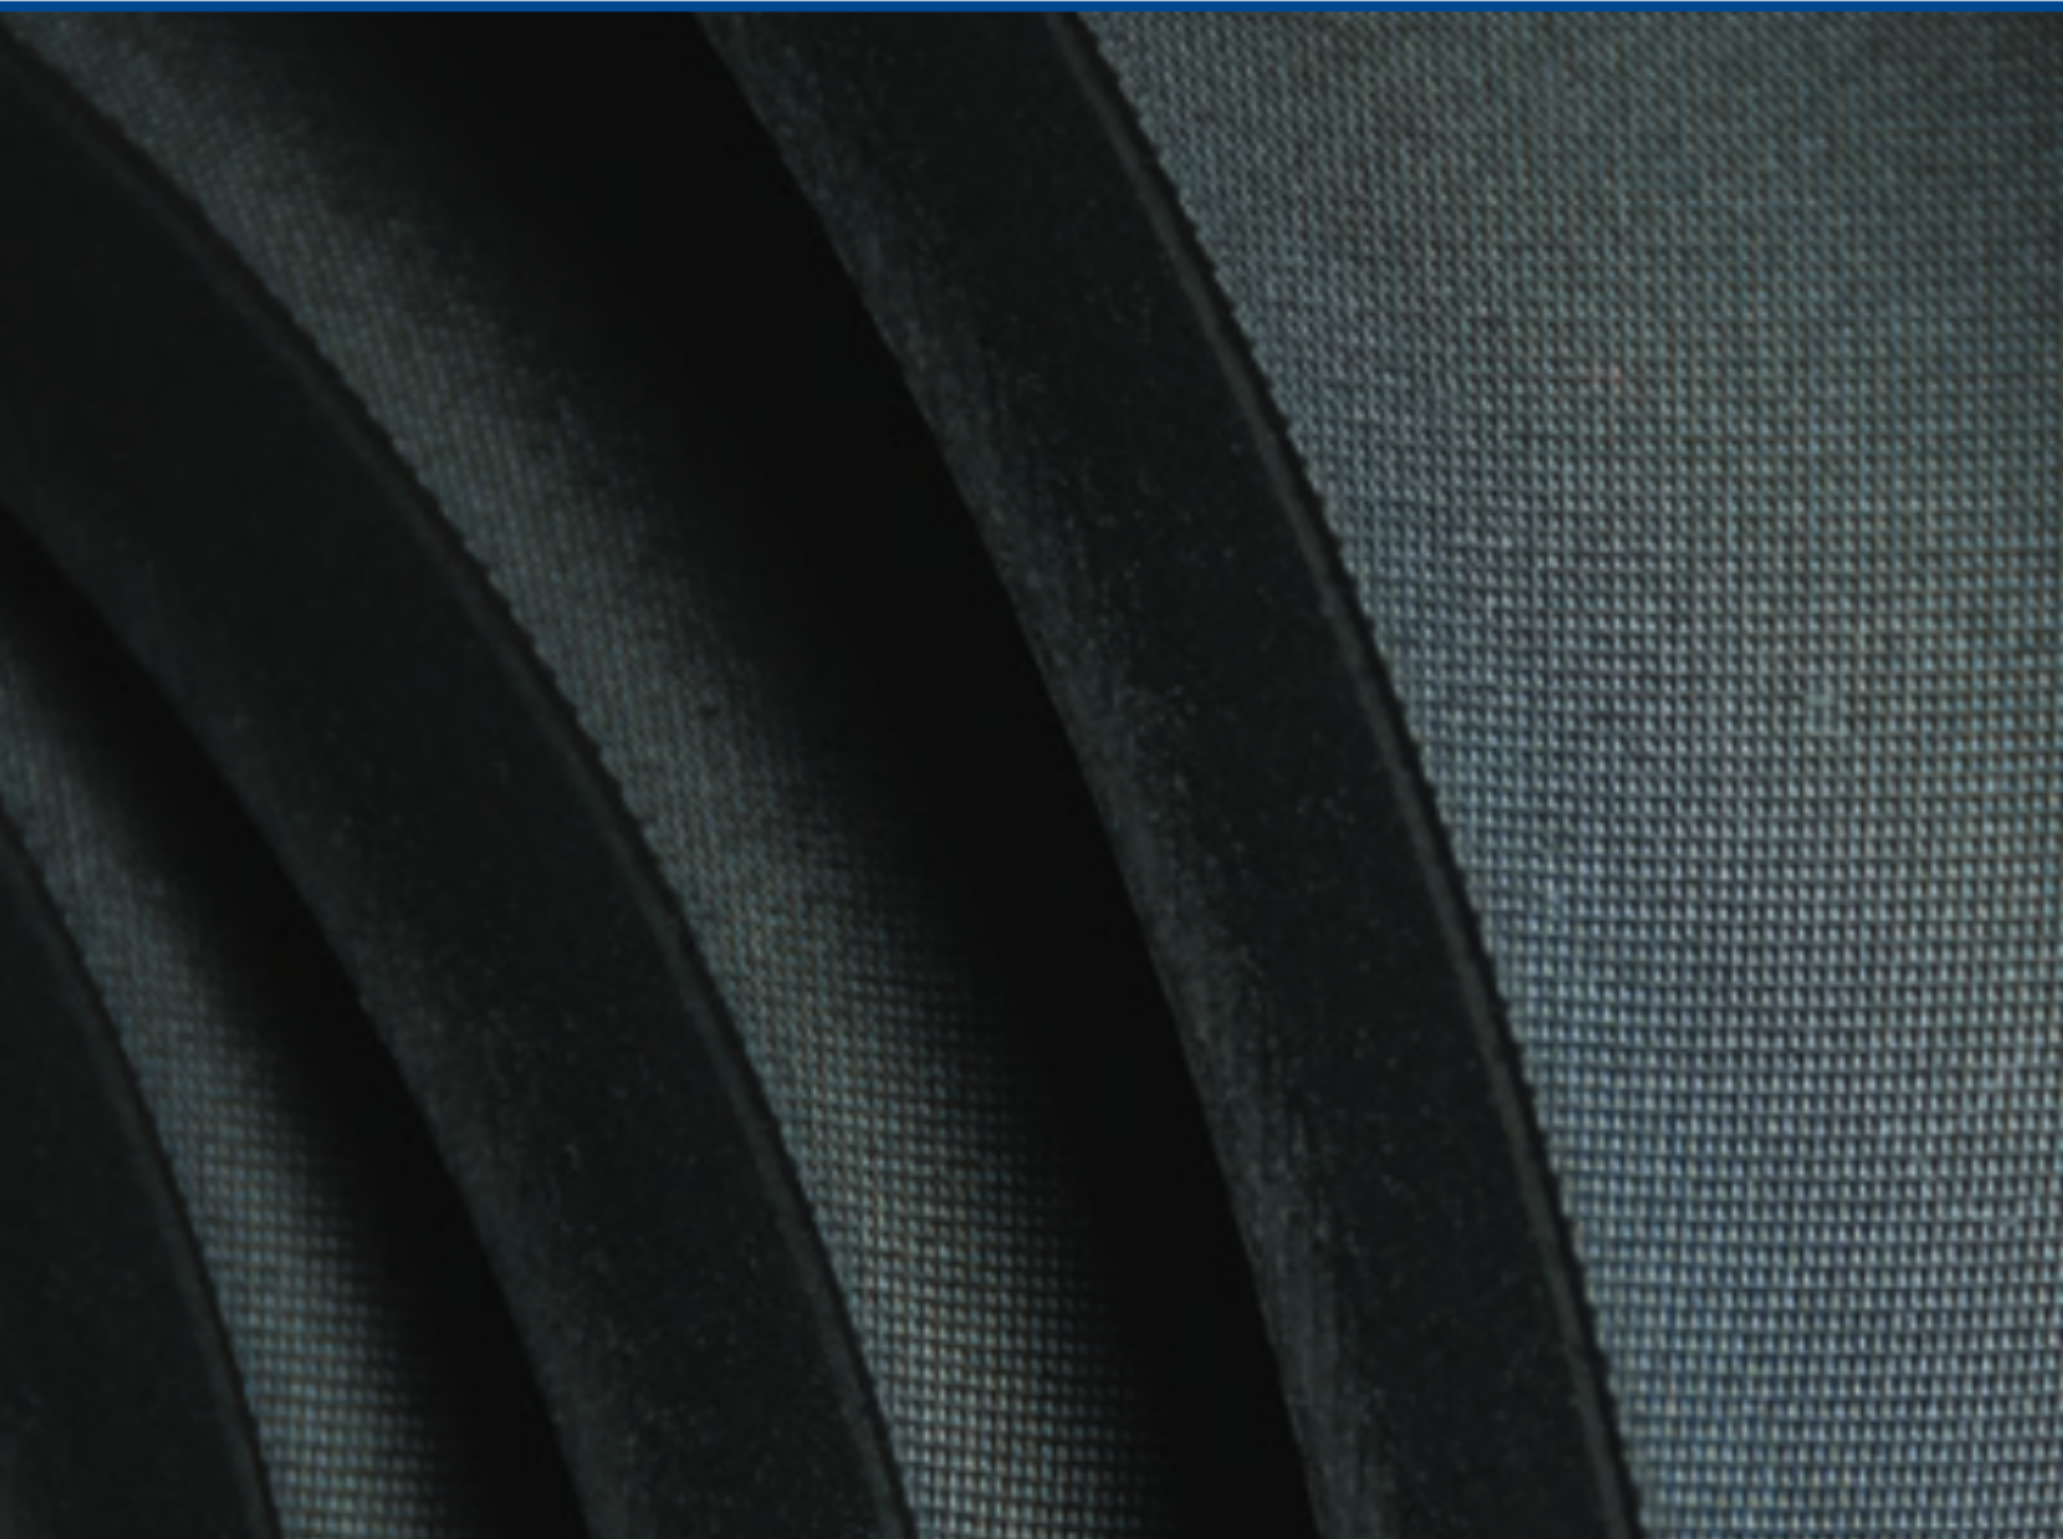

SUPREME-GUARD™ *(Natural Rubber)*

Premium Black Sheet with CR Bonding Layer

GENERAL PROPERTIES

- Black 60 durometer version
- Compounded with added carbon black
- Maximum strength
- Impact, noise, vibration reduction
- Insulative properties
- Excellent adhesion
- CR bonding layer

POLYMER

Natural Rubber (NR)
Neoprene Textured Bonding Layer (NR/CR)



View Up To Date Info



◀ SCAN OR VISIT
**KOA.link/
SU-GU**

Series	ASTM Specification (SI units)	Temperature Range	Specific Gravity (gr/cc)	Durometer	Tensile Strength (psi)	Elongation (%)	Tear (lbs/in)
Supreme-Guard	D2000 : 4AA630A13F17Z1	-40° to 180°F (-40° to 82°C)	1.15	60 -0/+10	3000 min. 3300 typical	400 min.	500 typical

ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
	DIN Abrasion Method 53516	Wet: 20 mm ³ Dry: 150 mm ³
	D2137 Cold Temperature	-40°C/°F min.
	D395 Compression Set (Method B) 22 hrs @ 70°C (158°F)	50% max.
	D573 Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +10 Tensile (%): -25 max. Elongation (%): -25 max.

ADDITIONAL SPECIFICATIONS

Grade	Premium
Finish	Smooth
Powder	No
Color	Black

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft./Roll)	Surface (sft)	Approx. Lbs./Roll
162-16-482*	1/4 x 48	35	140	214
162-24-482*	3/8 x 48	35	140	320
162-32-482*	1/2 x 48	35	140	429

*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.
Maximum pieces per roll: 2 • Maximum piece length: 10' • Width tolerance: -0 / +1"
Technical specifications are for the product without bonding layer.
Material is within commercial sheet rubber gauge tolerances.
The documentation for sheet rubber gauge tolerances is published on our website.
Typical values do not constitute a specification.
Please ensure the product meets your application specification prior to order placement.
Specifications are subject to change without notice. The website version prevails.
Total roll length may vary by ±10% for domestically manufactured (SUPREME-GUARD) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.