


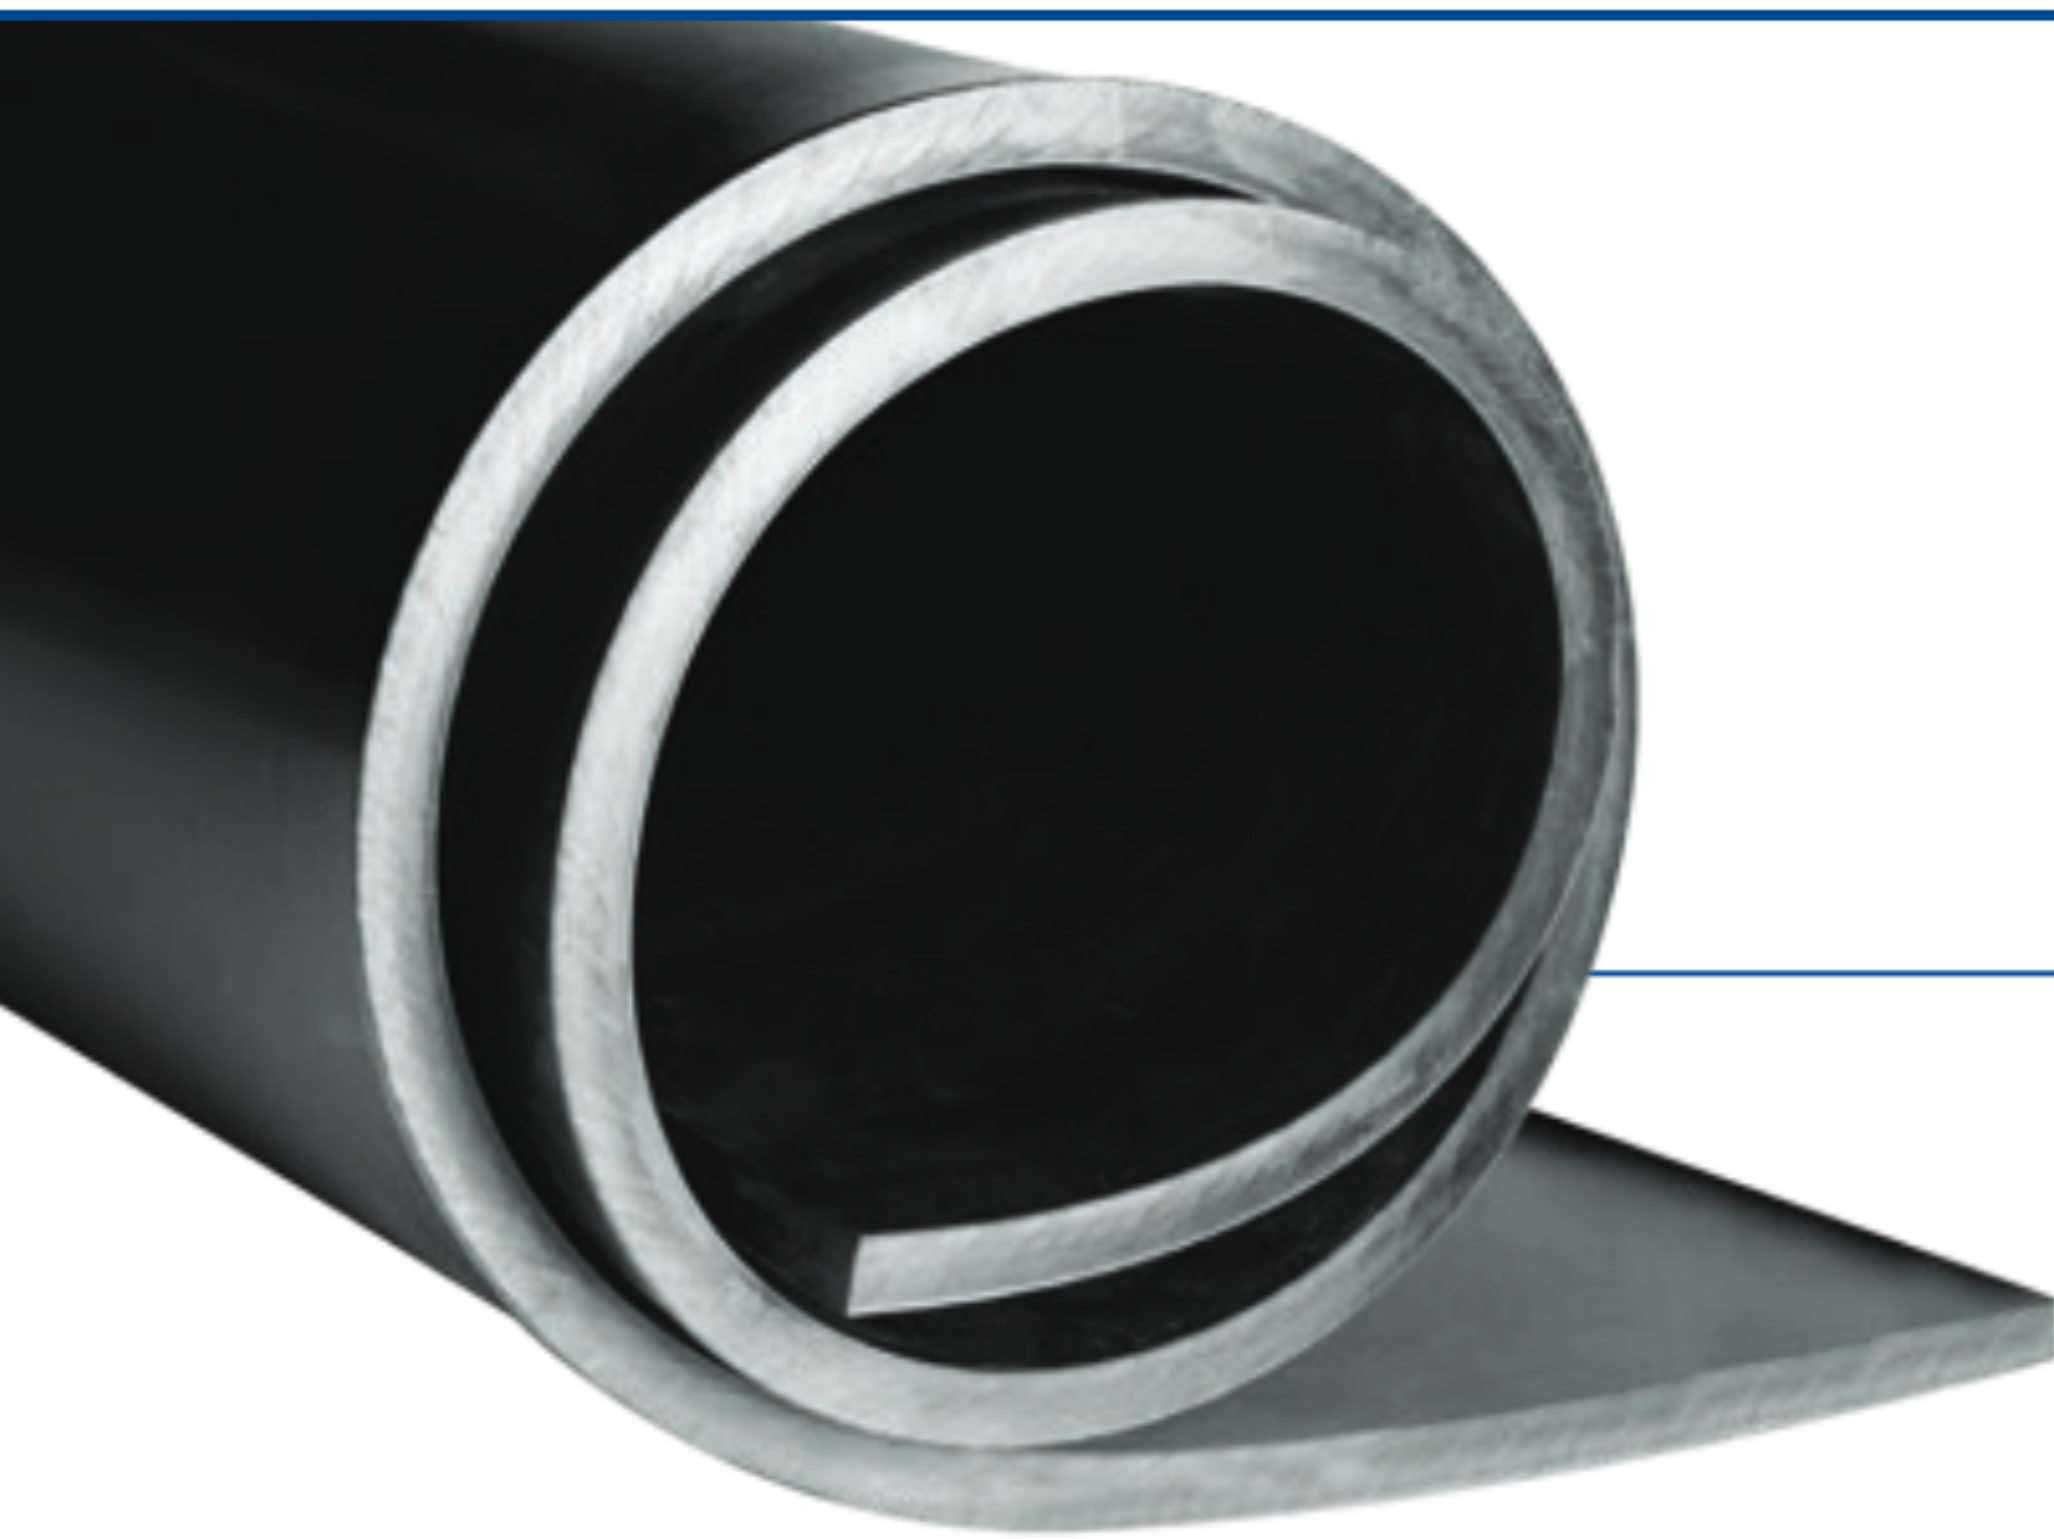

U.S. Military Specification Grade *(Neoprene)*

Premium Black Sheet MIL-6855 Class 2, Grade 60

GENERAL PROPERTIES

- Premium grade neoprene
- Specifically designed to meet the requirements of the U.S. military

POLYMER

Neoprene (CR)

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
MIL-6855](https://koya.link/MIL-6855)

Series	ASTM Specification (SI units)	Temperature Range	Specific Gravity (gr/cc)	Durometer	Tensile Strength (psi)	Elongation (%)
MIL-6855	ASTM D2240	-22° to 212°F (-30° to 100°C)	1.31	60	1500 min.	300 min.

ADDITIONAL SPECIFICATIONS

Grade	Military
Finish	Smooth
Powder	Yes
Color	Black

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft./Roll)	Surface (sft)	Approx. Lbs./Roll
20M-08-362*	1/8 x 36	39	117	106

*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.
Material is within commercial sheet rubber gauge tolerances.
The documentation for sheet rubber gauge tolerances is published on our website.
Please ensure the product meets your application specification prior to order placement.
Specifications are subject to change without notice. The website version prevails.
Total roll length may vary by ±10% for domestically manufactured (MIL-6855) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.