


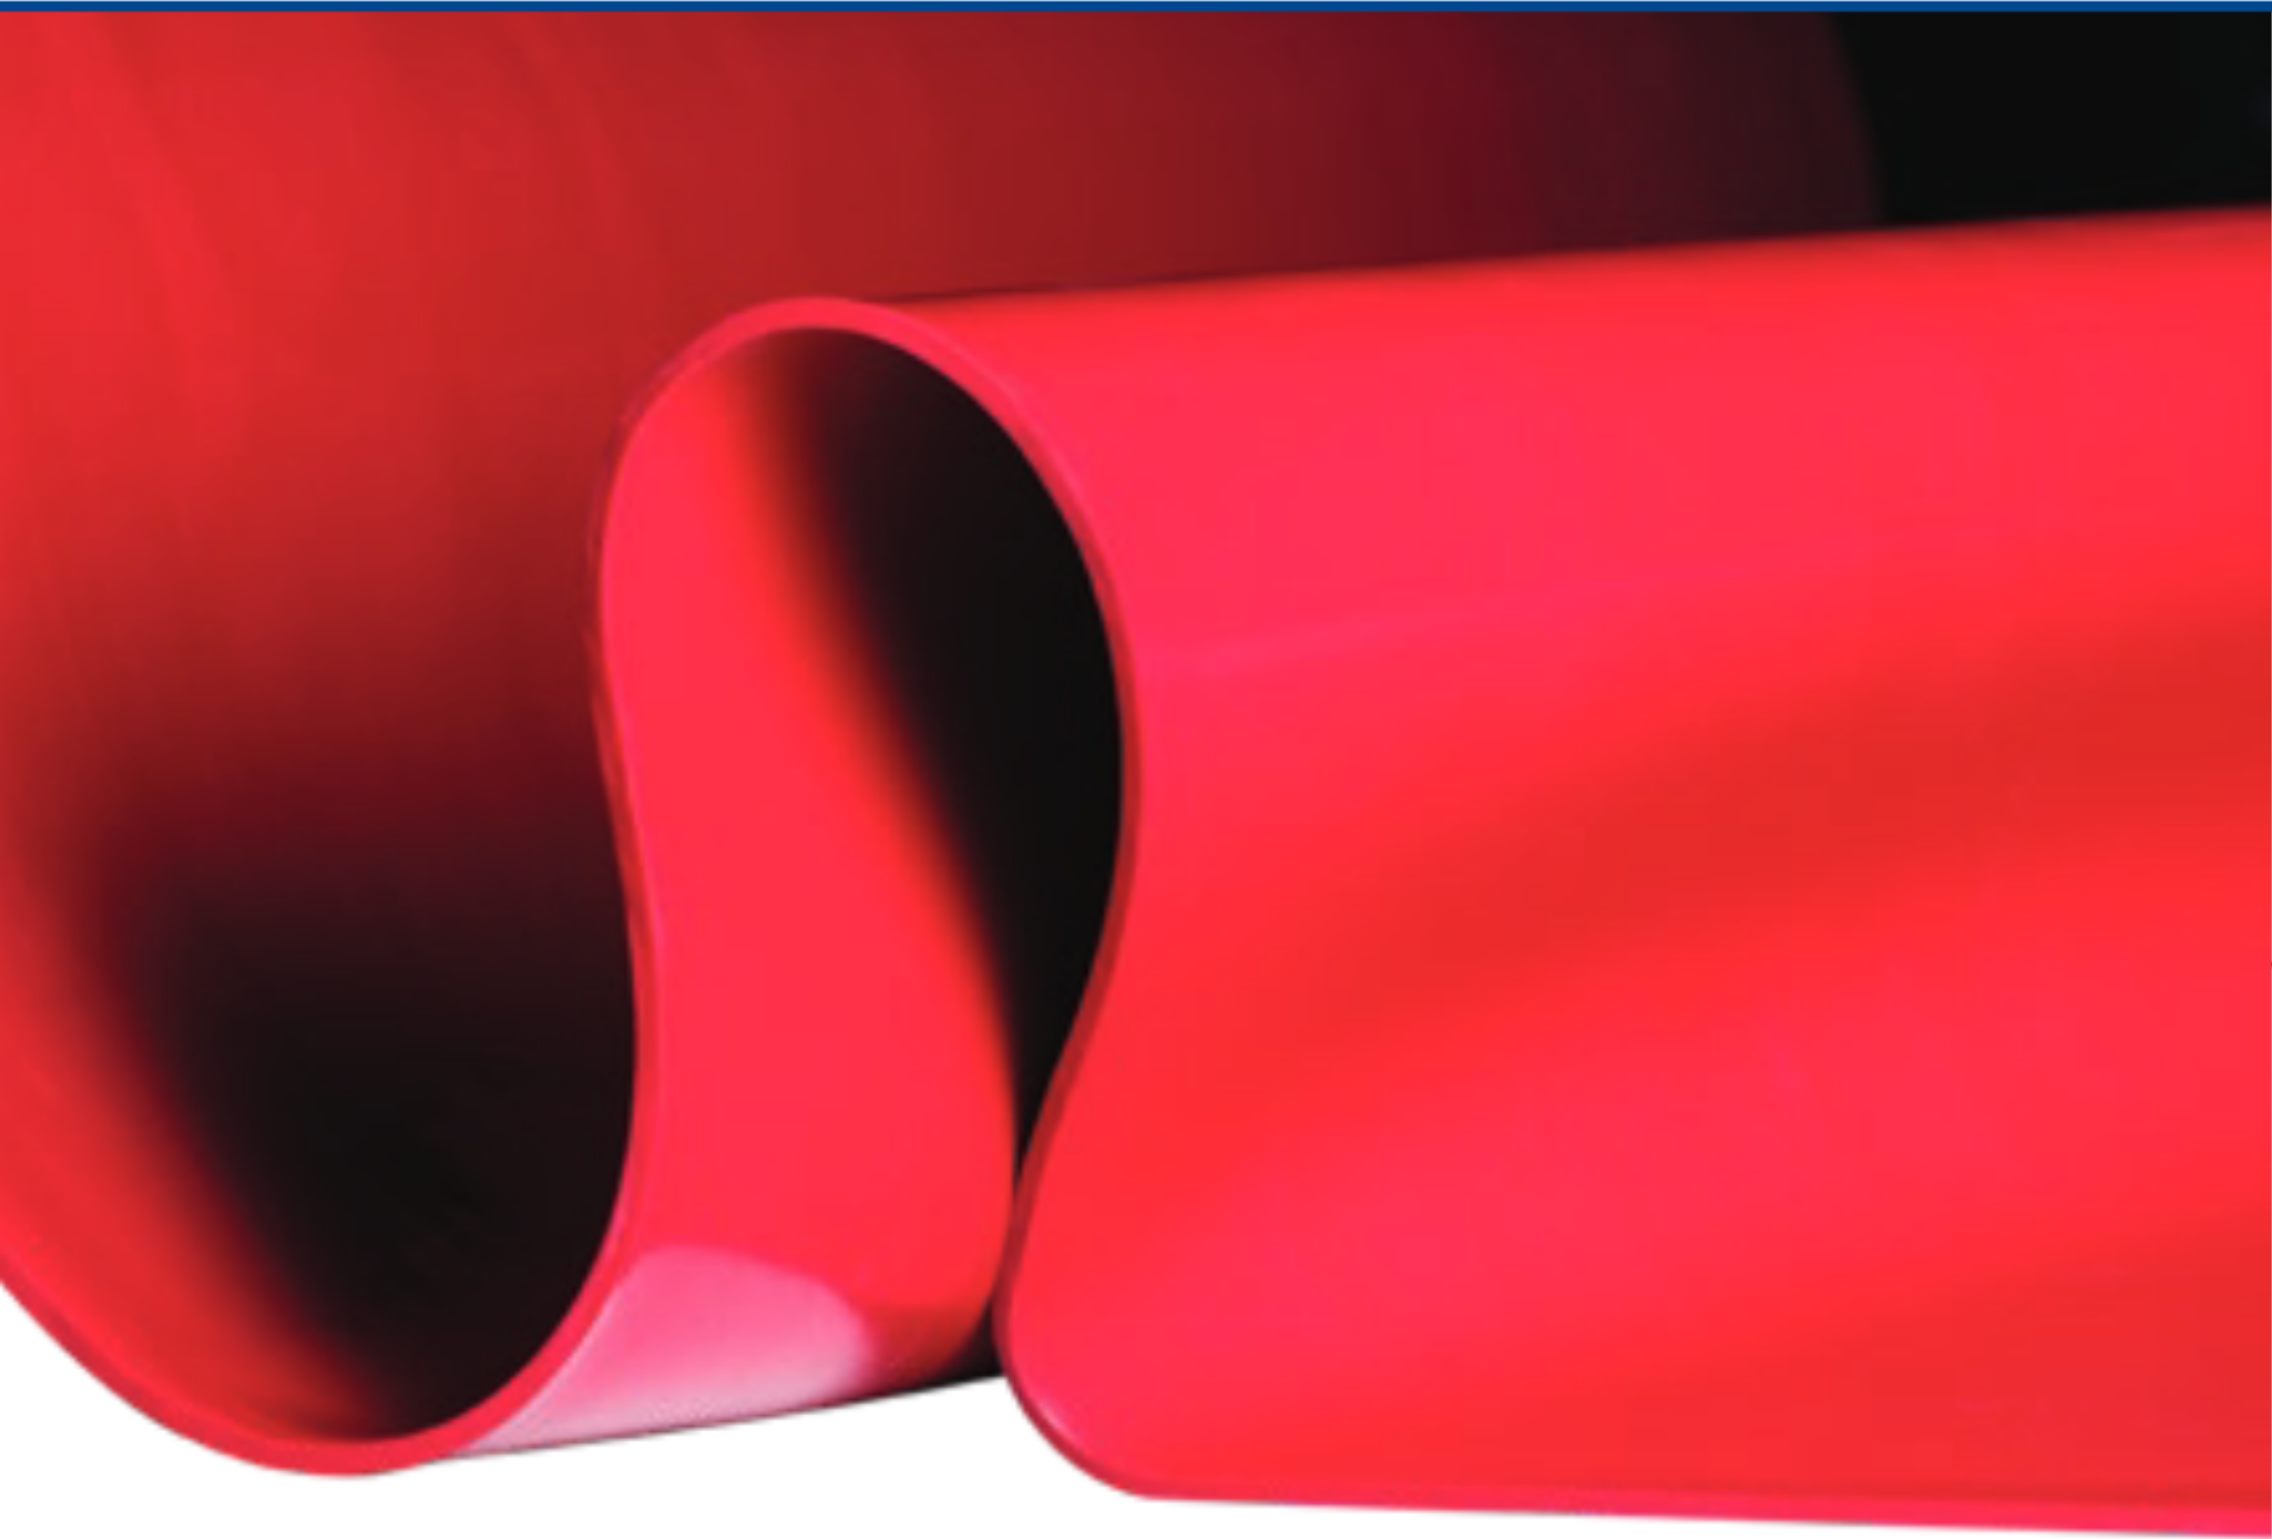

AB-131 Series *(Natural Rubber)*

Red Sheet

GENERAL PROPERTIES

- High tensile strength
- Cut, tear, and abrasion resistant
- Rebound elasticity
- Flexibility
- Good adhesion with proper surface prep
- Softer feel for squeegee

POLYMER

Natural Rubber (NR)

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
AB-131](https://koya.link/AB-131)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
AB-131	D2000: 2AA325A13F17Z1	-20° to 180°F (-29° to 82°C)	35	2500 min.	500 min.

ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.

ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	Yes
Color	Red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
135-08-482	1/8 x 48	80	320	213
135-12-482	3/16 x 48	60	240	228
135-16-482	1/4 x 48	40	160	203
135-24-482	3/8 x 48	30	120	226

Minimum piece length: 10' • Width tolerance: -0 / +1"

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website. Please ensure the product meets your application specification prior to order placement.

Specifications are subject to change without notice. The website version prevails.

Total roll length may vary by ±10% for domestically manufactured (AB-131) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.