


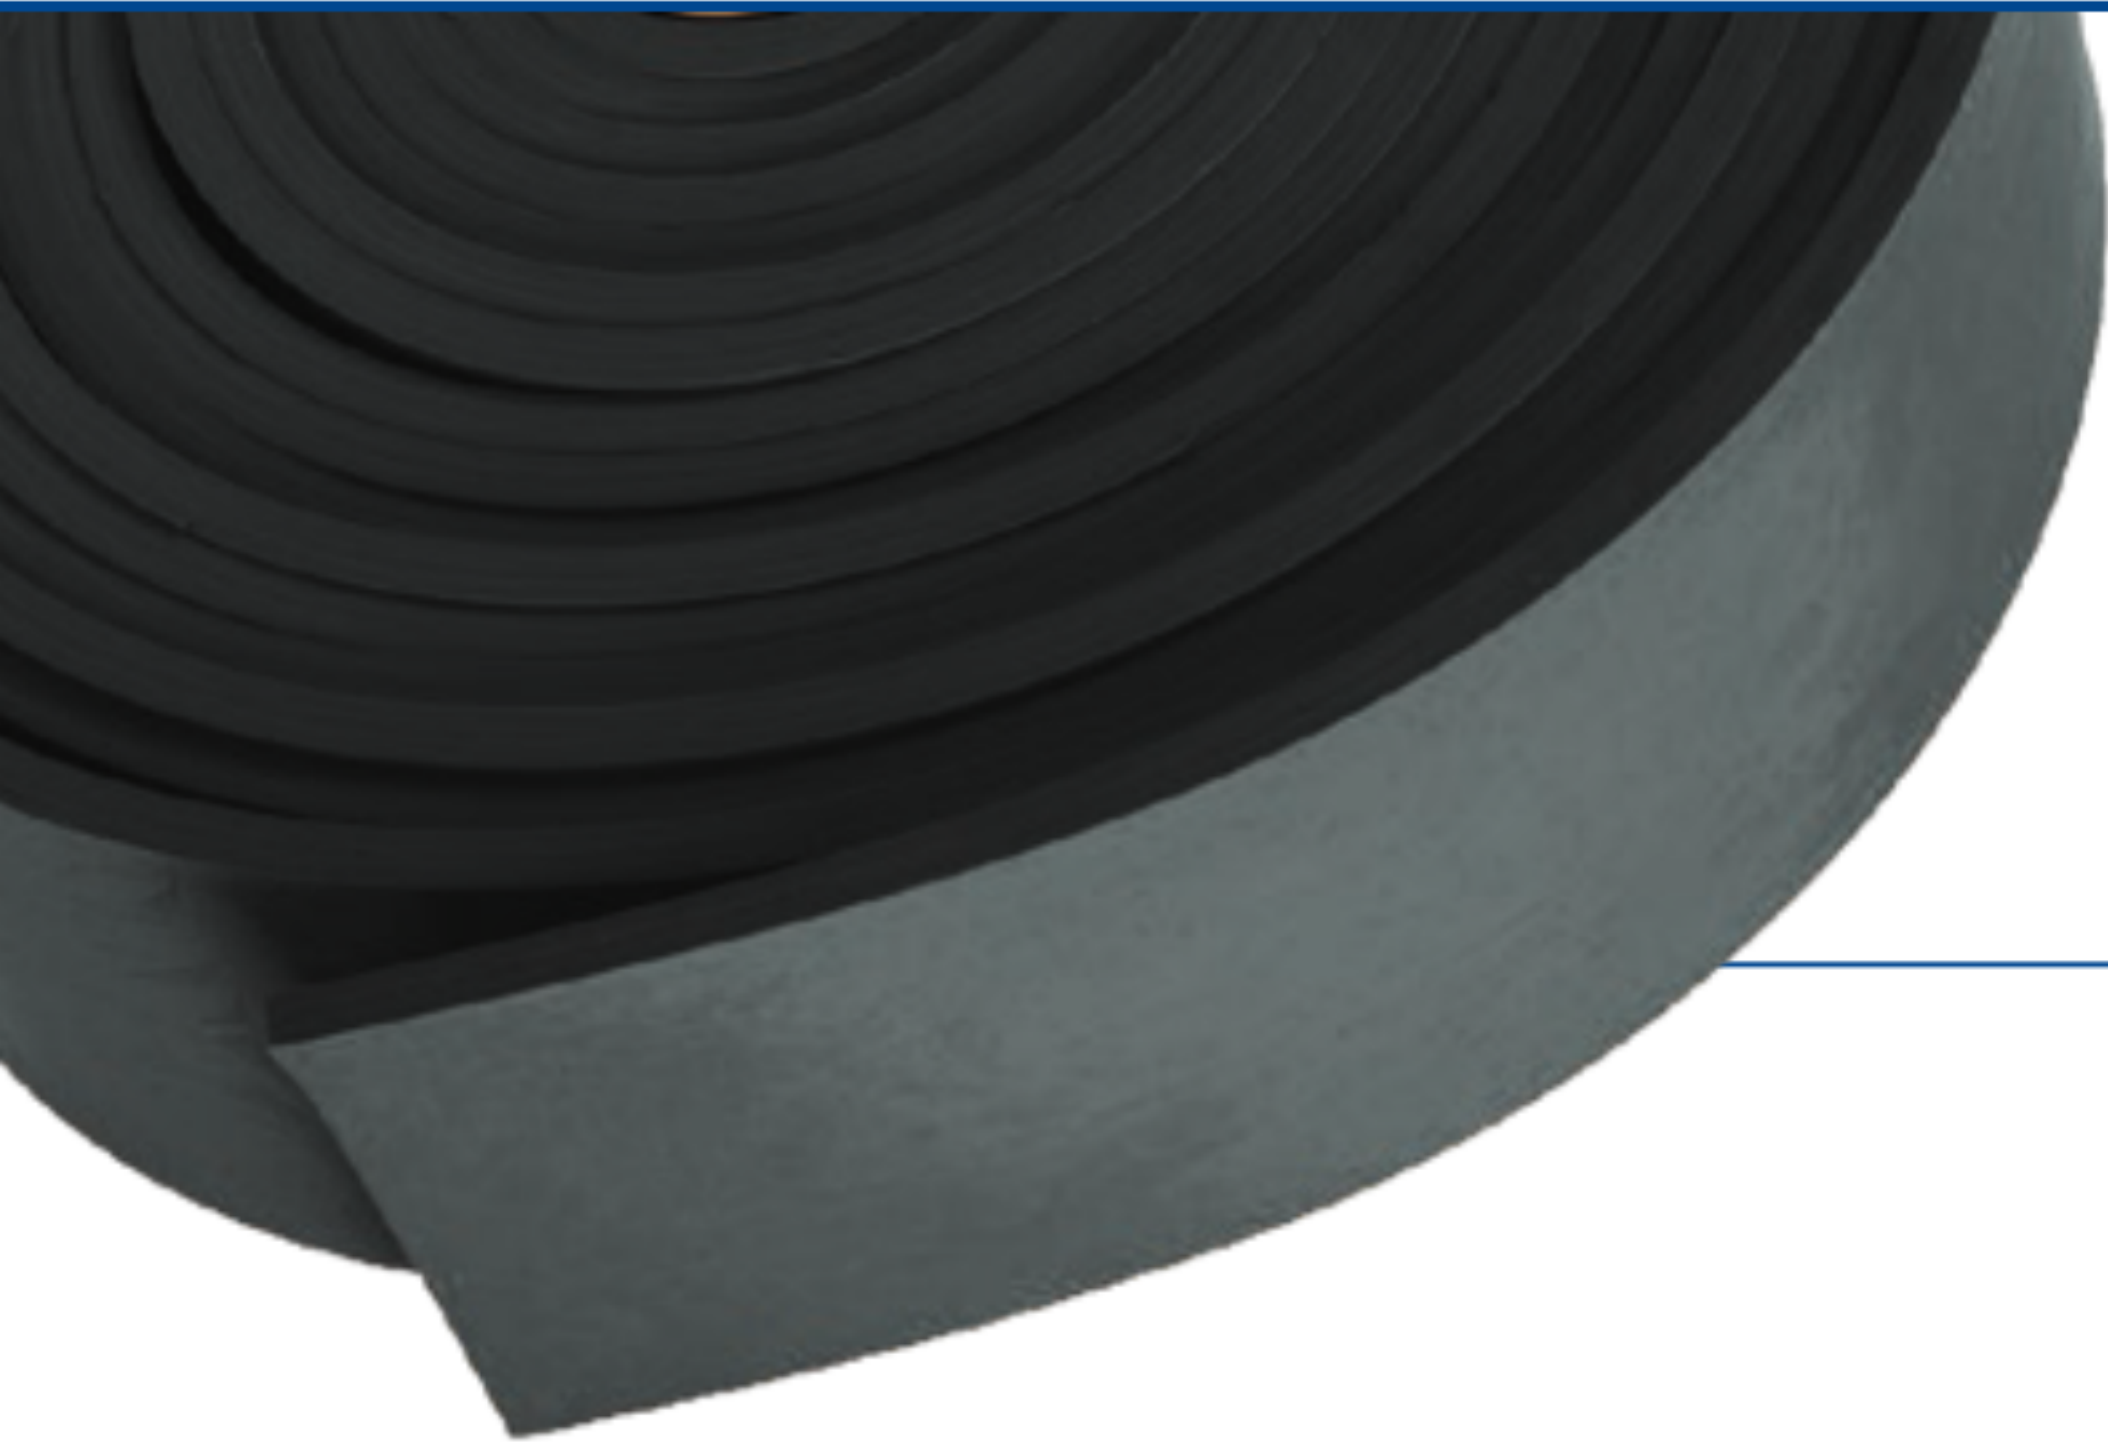

IM-166 Series (Styrene-Butadiene)

Black Skirtboard

GENERAL PROPERTIES

- Abrasion resistant
- Flexibility
- Excellent for skirtboard applications

POLYMER

Styrene-Butadiene (SBR)

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/IM-166](https://koi.link/IM-166)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-166	ASTM D2240	-20° to 180°F (-29° to 82°C)	60 +/- 7	500 typical	300 typical


ADDITIONAL SPECIFICATIONS

Grade	Commercial
Finish	Smooth
Powder	No
Color	Black

Item Number	Gauge (in)	Width (in)	Avg. Length (Linear Ft./Roll)	Approx. Lbs./Roll
166-04-484	1/16	48	50	90
166-08-364*	1/8	36	50	134
166-08-484	1/8	48	50	178
166-08-724*	1/8	72	50	188
166-16-034*	1/4	3	50	22
166-16-044	1/4	4	50	30
166-16-064	1/4	6	50	44
166-16-084	1/4	8	50	59
166-16-104*	1/4	10	50	74
166-16-124	1/4	12	50	88
166-16-484	1/4	48	50	354
166-24-034*	3/8	3	50	33
166-24-044	3/8	4	50	44
166-24-054*	3/8	5	50	55
166-24-064	3/8	6	50	66
166-24-084	3/8	8	50	88
166-24-104*	3/8	10	50	110
166-24-124	3/8	12	50	132
166-24-484	3/8	48	50	528

continued

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

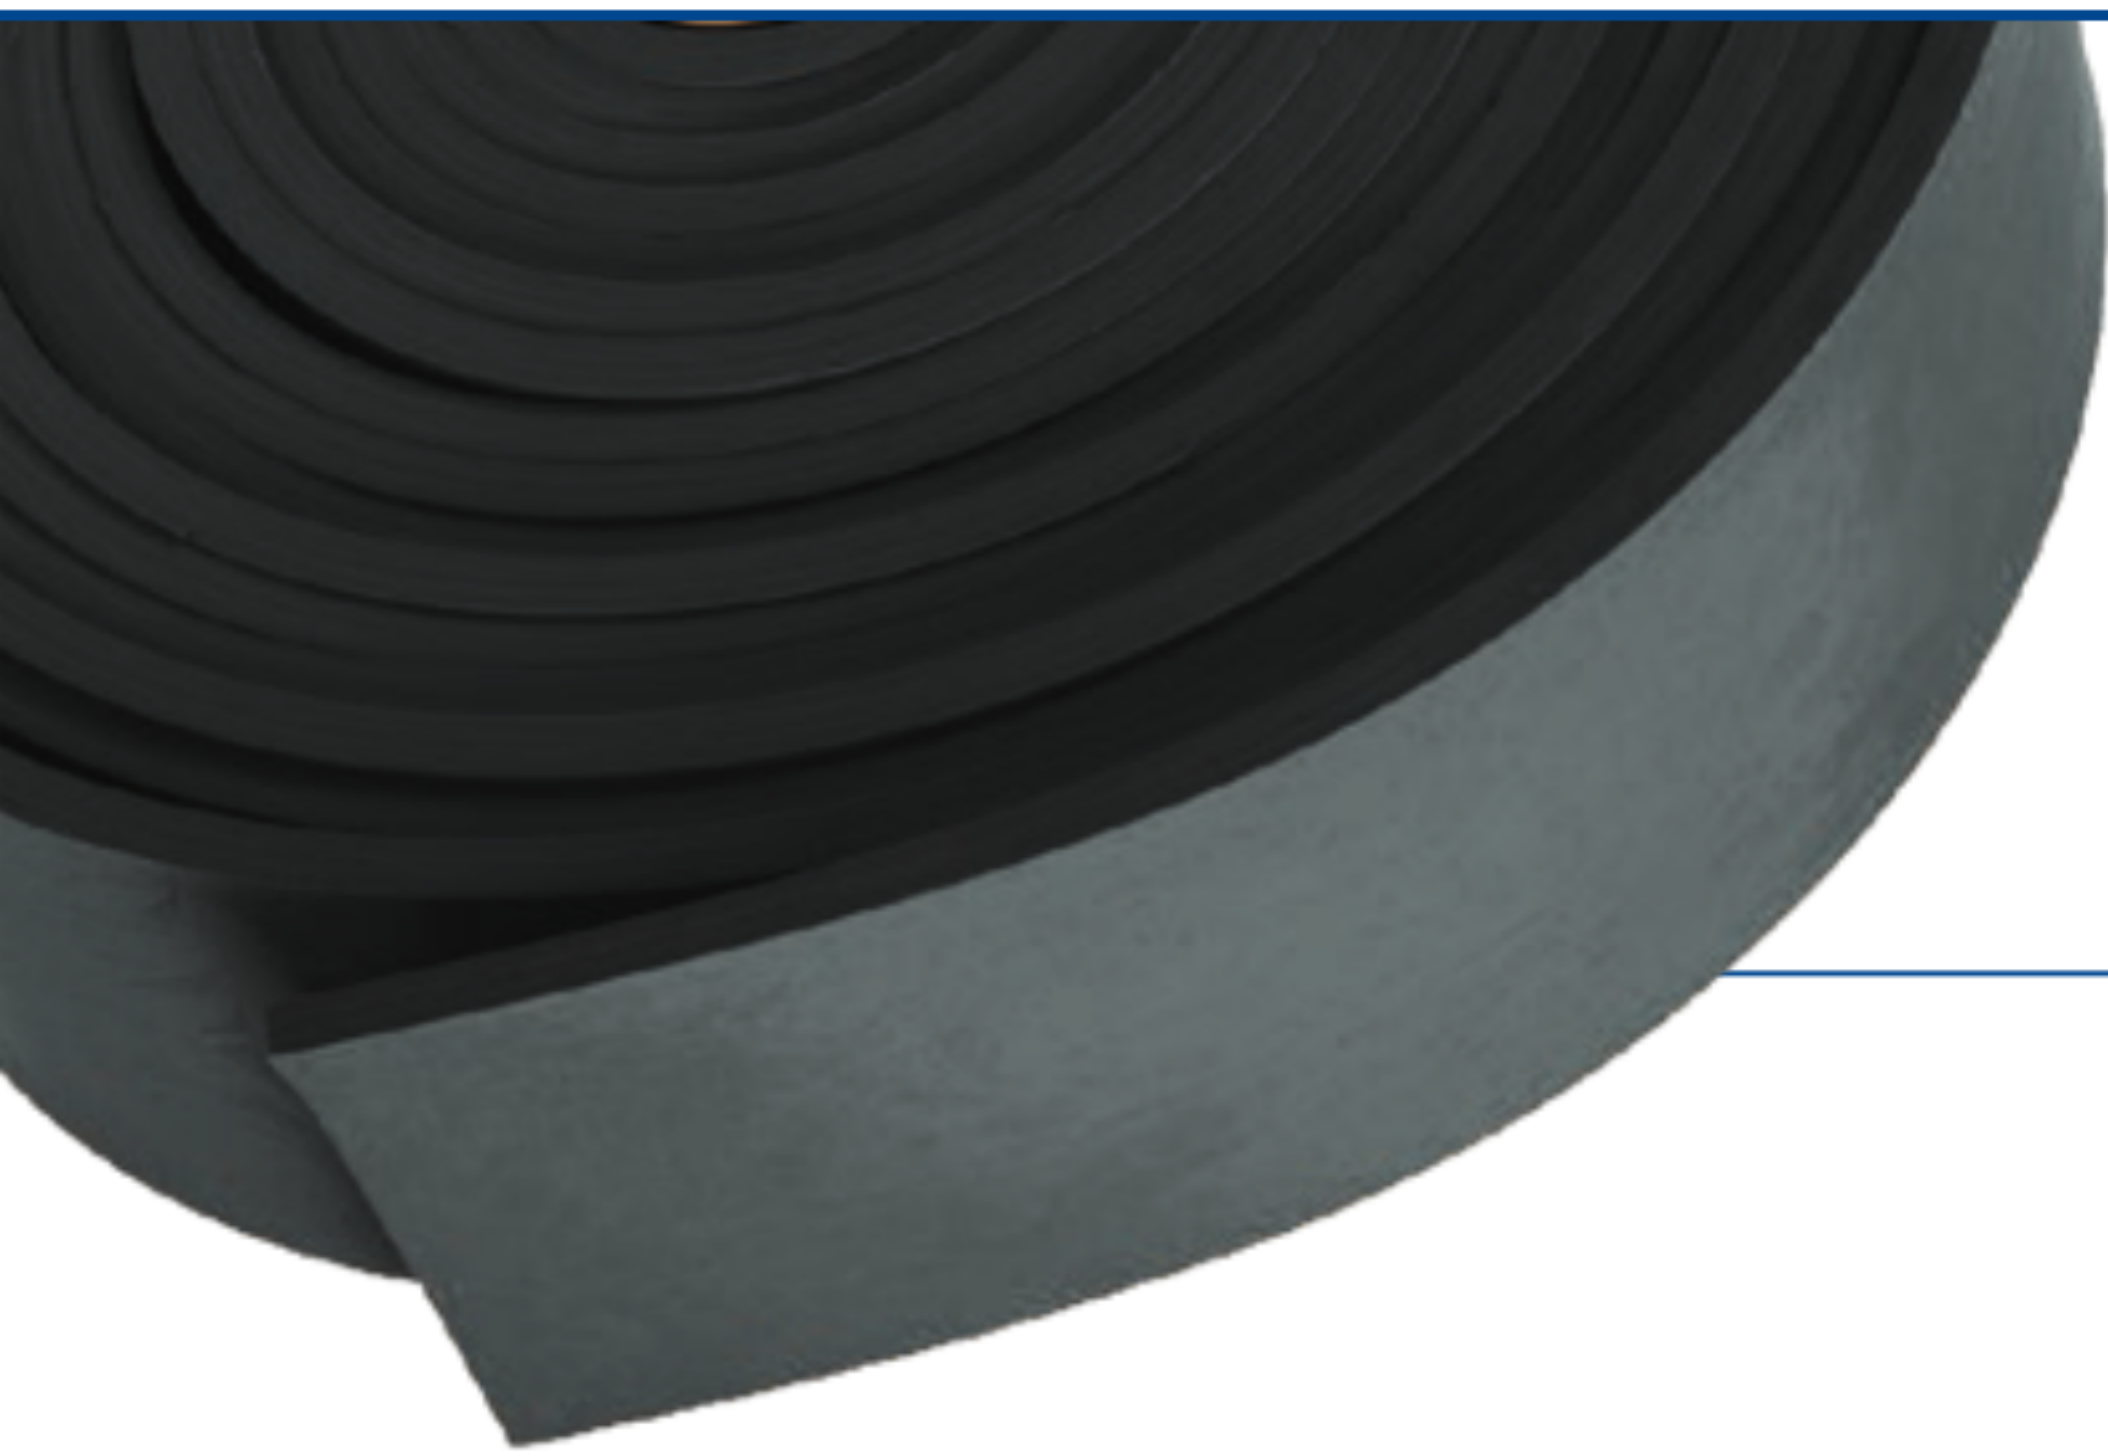

IM-166 Series (Styrene-Butadiene)

Black Skirtboard

continued from page 12

Item Number	Gauge (in)	Width (in)	Avg. Length (Linear Ft./Roll)	Approx. Lbs./Roll
166-32-034*	1/2	3	50	44
166-32-044	1/2	4	50	58
166-32-054	1/2	5	50	73
166-32-064	1/2	6	50	88
166-32-084	1/2	8	50	117
166-32-104	1/2	10	50	146
166-32-124	1/2	12	50	175
166-32-484	1/2	48	50	702
166-48-034*	3/4	3	50	66
166-48-044*	3/4	4	50	88
166-48-064	3/4	6	50	132
166-48-084	3/4	8	50	176
166-48-104*	3/4	10	50	219
166-48-124	3/4	12	50	263
166-48-484	3/4	48	50	1054
166-64-034	1	3	50	88
166-64-044*	1	4	50	117
166-64-064	1	6	50	175
166-64-084	1	8	50	234
166-64-104	1	10	50	292
166-64-124	1	12	50	351
166-64-484	1	48	50	1404
166-65-104*	1 1/4	10	50	355
166-66-034*	1 1/2	3	50	131
166-66-044*	1 1/2	4	50	175
166-66-064*	1 1/2	6	50	263
166-66-084	1 1/2	8	50	351
166-66-104	1 1/2	10	50	439
166-66-124	1 1/2	12	50	527
166-66-484*	1 1/2	48	50	2341
166-68-484*	2	48	50	2803

*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.
Maximum pieces per roll: 1 • Width tolerance: +/-0.177" • Durometer tolerance: +/-7 points
Material is within commercial sheet rubber gauge tolerances. The documentation for sheet rubber gauge tolerances is published on our website. Typical values do not constitute a specification. Please ensure the product meets your application specification prior to order placement. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.