

Accuflex Beverage Transfer Products



**Flushable
Glas-Flex™
Liner**



Bev-Seal Ultra® 975FR Series Fire Resistant Cabled Bundle

Construction: Flushable **Bev-Seal Ultra® 175FR Series** fire resistant hoses, individually branded with NSF-51 and NSF-61 listings, and date codes for traceability.


Each hose incorporates extruded layers of fire resistant non-halogen polyolefin compound. Special metallized film wrap over the hoses, plus an outer wrap of white fiberglass tape secure the

hoses and provide additional Fire Resistance.

When a simulated model bundle is tested in accordance with ASTM E84/UL 723 Test for Surface Burning Characteristics of Building Materials, the Flame Spread Index (FSI) and Smoke Developed Index (SDI) are less than 25 and 75 respectively, in compliance with Class 1 or "A" requirements.

Nominal Specifications

Part Number	Standard Package	Configuration	Max. Bundle OD (in)	Weight per Pkg.		Min. Bend Radius (in)	Clamp Size (mm)
				(lbs)	(kgs)		
975FR-00100012-01	100' Coil	See Below	2.1	79	36	14	See Below
975FR-00100012-02	200' Reel	See Below	2.1	174	79	14	See Below
975FR-00100012-05	500' Reel	See Below	2.1	411	187	14	See Below

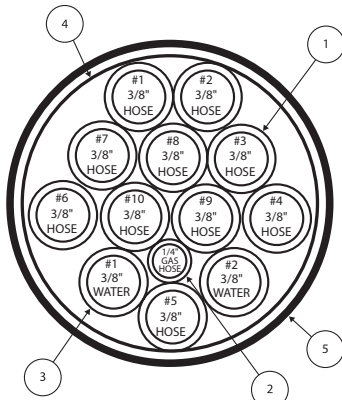

975FR-00100012-01/-02/-05

- 1 10 x 3/8" I.D. x .535" O.D. F/R BARRIER HOSES (#1 - #10) FOR SODA OR PUNGENT FLAVOR SYRUP (e.g. ROOT BEER) (14.5 Clamp Size)
- 2 1 x 1/4" I.D. x .457" O.D. F/R GAS HOSE (13.3 Clamp Size)
- 3 2 x 3/8" I.D. x .593" O.D. F/R BARRIER "WATER" HOSES (15.7 Clamp Size)
- 4 ALUMINUM WRAP
- 5 FIBERGLASS WRAP

Notes:

- 1) 975FR Series beverage bundles are available on special order. The configuration shown above is for illustrative purposes.
- 2) All testing was carried out on finished products rather than material components only. A test report confirming fire and smoke indexes is available.

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.