


ALFAGOMMA® Two-Piece AlfaCrimp Fittings – Y Series

Interlock Inserts –  US End Configurations




View Up To Date Info

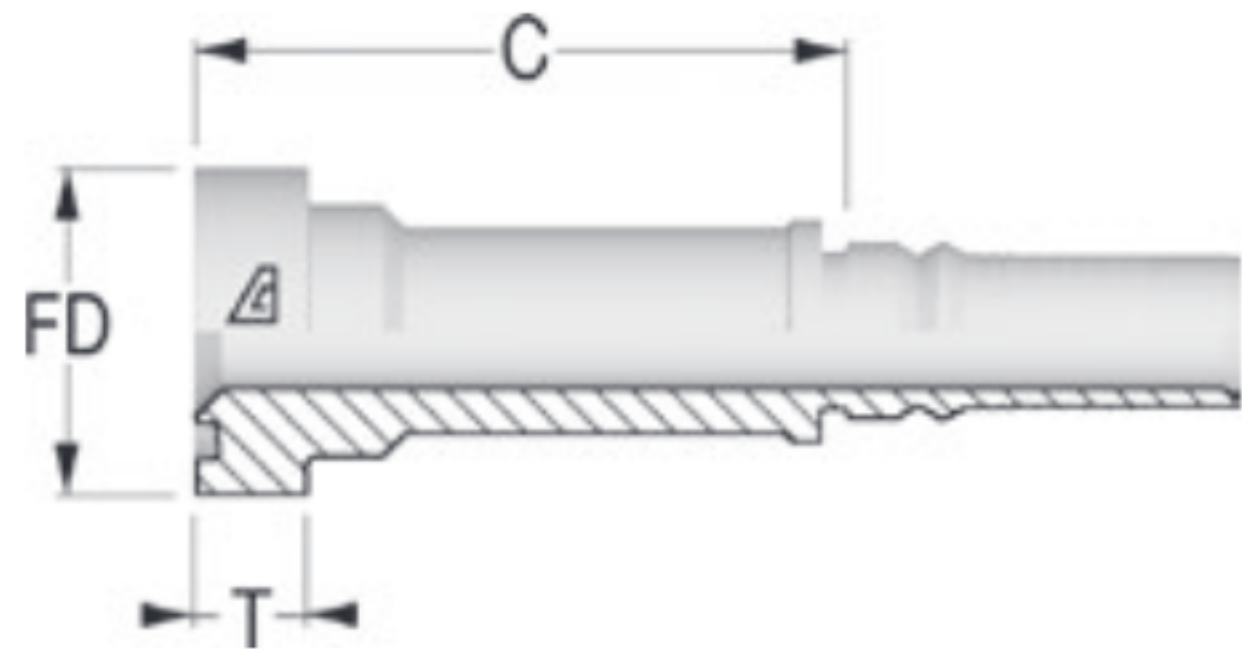

◀ SCAN OR VISIT
[KOA.link/
Y-CFLS](https://KOA.link/Y-CFLS)

O-RING SUPERCAT 6000 PSI FLANGE INTERLOCK

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	T (mm)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)			
Y-1212-CFLS	12	3/4	19.0	1.63	41.3	82.0	14.3	0.88
Y-1616-CFLS	16	1	25.4	1.88	47.6	90.0	14.3	1.31
Y-2020-CFLS	20	1 1/4	31.8	2.13	54.0	86.2	14.3	1.67

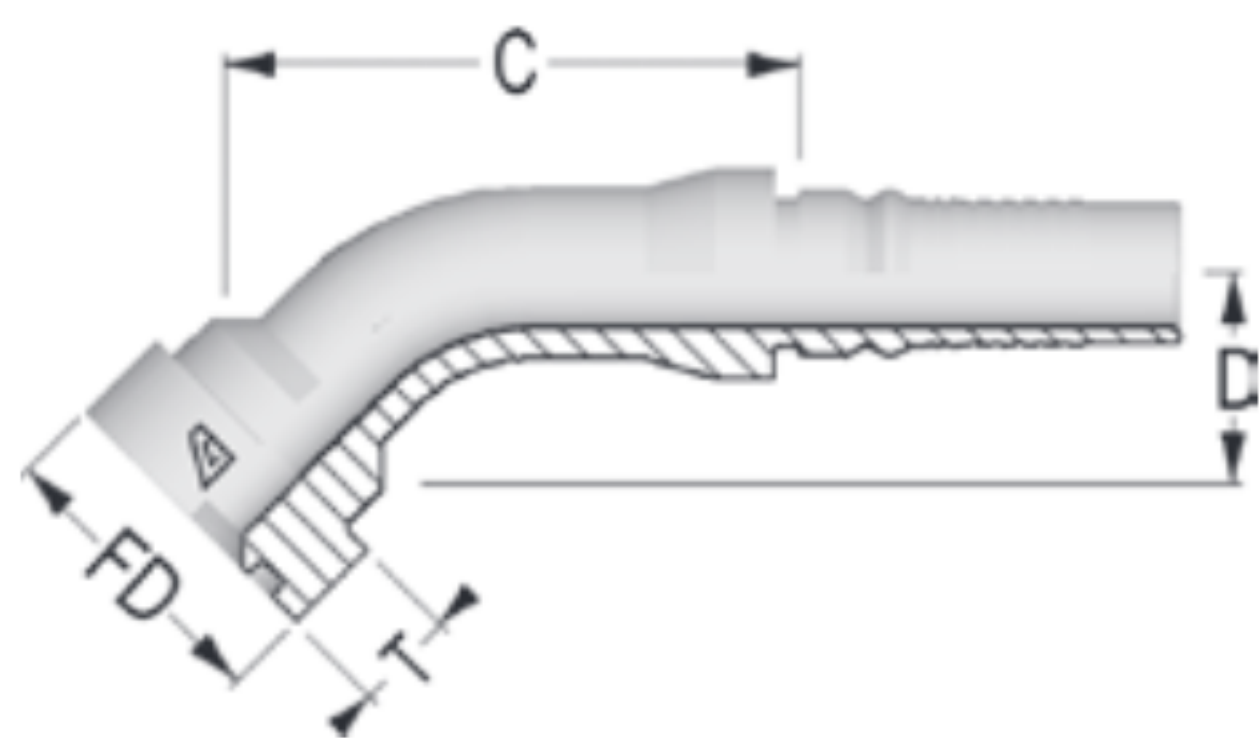

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
Y-CFL4](https://KOA.link/Y-CFL4)

45° O-RING SUPERCAT 6000 PSI FLANGE INTERLOCK

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	D Drop (mm)	T (mm)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)				
Y-1616-CFL4	16	1	25.4	1.88	47.6	93.9	40	14.3	1.37
Y-2020-CFL4	20	1 1/4	31.8	2.13	54.0	103.6	43	14.3	1.75

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.