


One-Piece AlfaCrimp Fittings – S Series

45° ORFS FEMALE




View Up To Date Info

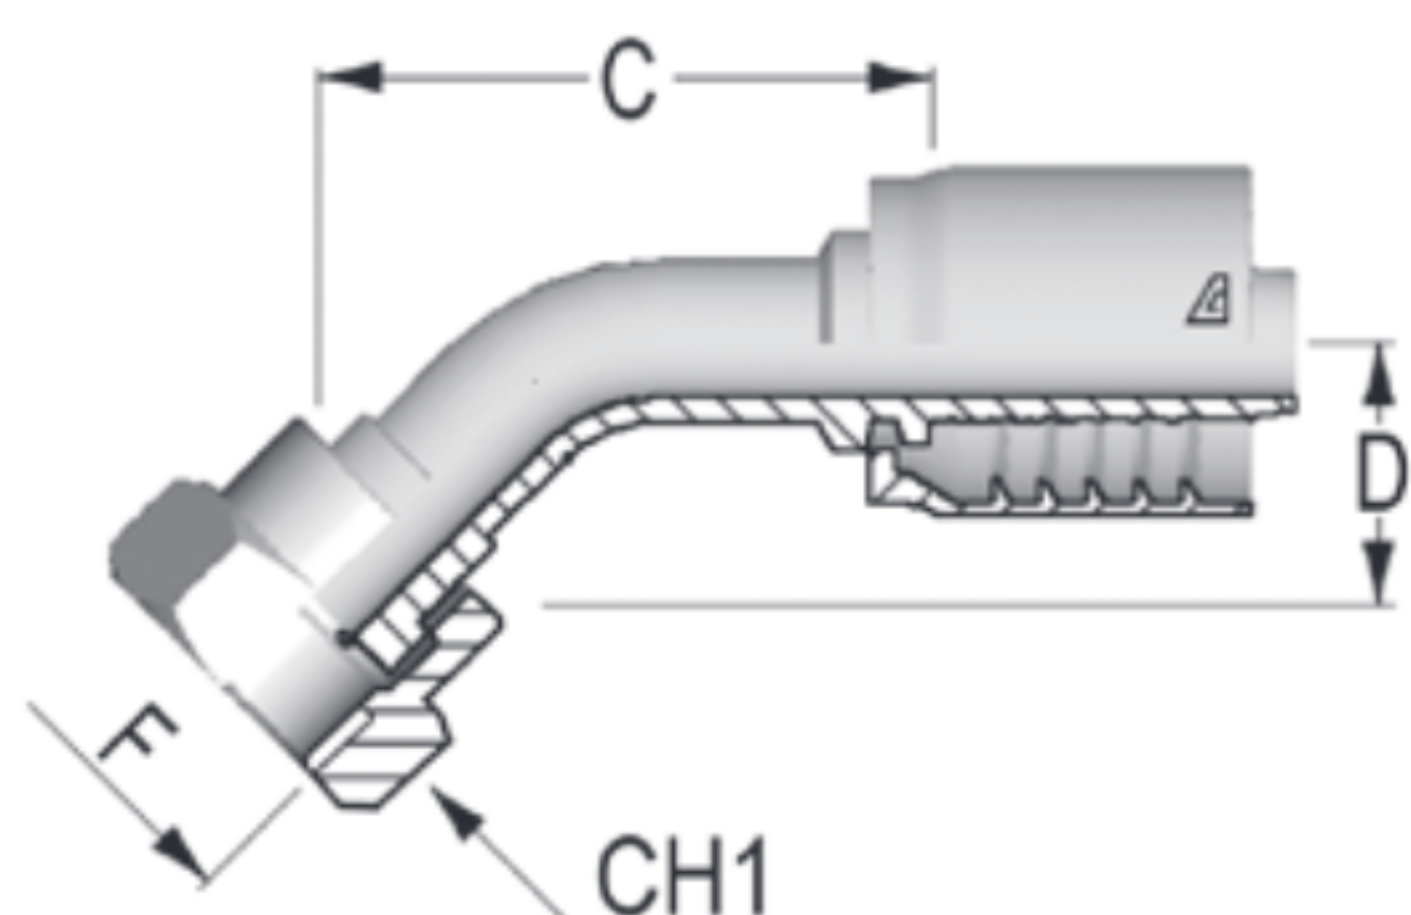

◀ SCAN OR VISIT
[KOA.link/
S-FO45](https://KOA.link/S-FO45)

Part Number	Dash Size	Hose ID Size		F Thread		C Cut-Off Factor (mm)	D Drop (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
		(in)	(mm)	Dash Size	Size (in) - TPI				
S-0404-F045	04	1/4	6.4	04	9/16-18	38	15.0	17	0.14
S-0606-F045	06	3/8	9.5	06	11/16-16	48	17.0	22	0.25
S-0808-F045	08	1/2	12.7	08	13/16-16	54	22.0	24	0.32
S-1010-F045	10	5/8	15.9	10	1-14	58	17.0	30	0.60
S-1212-F045	12	3/4	19.1	12	1 3/16-12	67	21.0	36	0.93
S-1216-F045	12	3/4	19.1	16	1 7/16-12	82	26.0	36	1.43
S-1616-F045	16	1	25.4	16	1 7/16-12	95	28.0	41	1.46
S-2020-F045	20	1 1/4	31.8	20	1 11/16-12	108	36.5	50	2.27

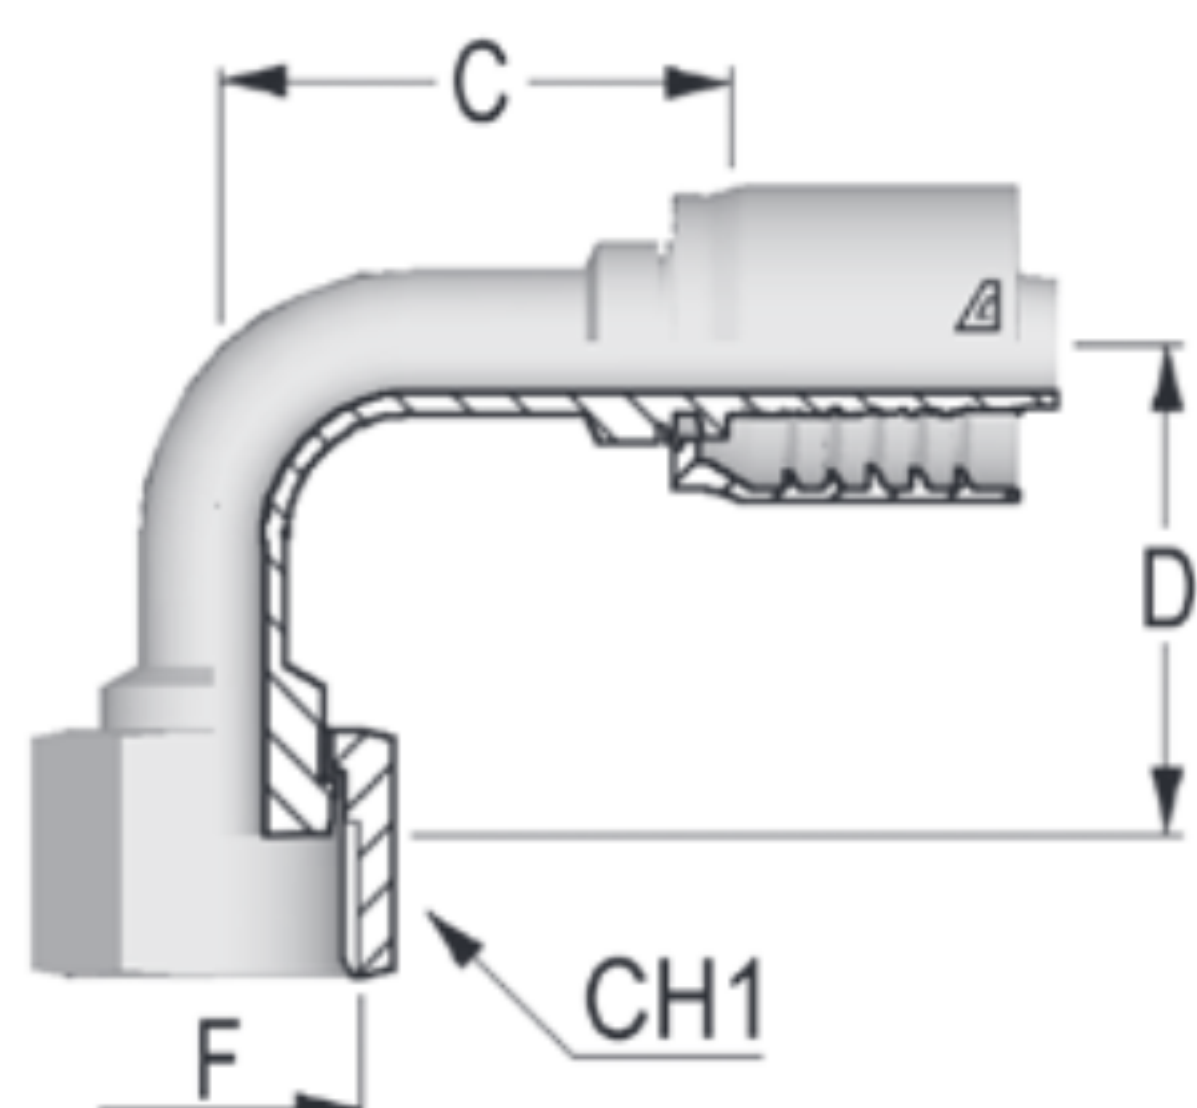

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
S-FO9M](https://KOA.link/S-FO9M)

90° ORFS FEMALE MEDIUM DROP

Part Number	Dash Size	Hose ID Size		F Thread		C Cut-Off Factor (mm)	D Drop (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
		(in)	(mm)	Dash Size	Size (in) - TPI				
S-0404-F09M	04	1/4	6.4	04	9/16-18	30	32	17	0.15
S-0606-F09M	06	3/8	9.5	06	11/16-16	43	38	22	0.27
S-0808-F09M	08	1/2	12.7	08	13/16-16	35	42	24	0.33
S-1010-F09M	10	5/8	15.9	10	1-14	56	44	30	0.68
S-1212-F09M	12	3/4	19.1	12	1 3/16-12	63	58	36	1.10
S-1216-F09M	12	3/4	19.1	16	1 7/16-12	70	58	41	1.57
S-1616-F09M	16	1	25.4	16	1 7/16-12	80	66	41	1.58
S-2020-F09M	20	1 1/4	31.8	20	1 11/16-12	101	81	50	2.50

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.