


# ALFAGOMMA® One-Piece AlfaCrimp Fittings – S Series

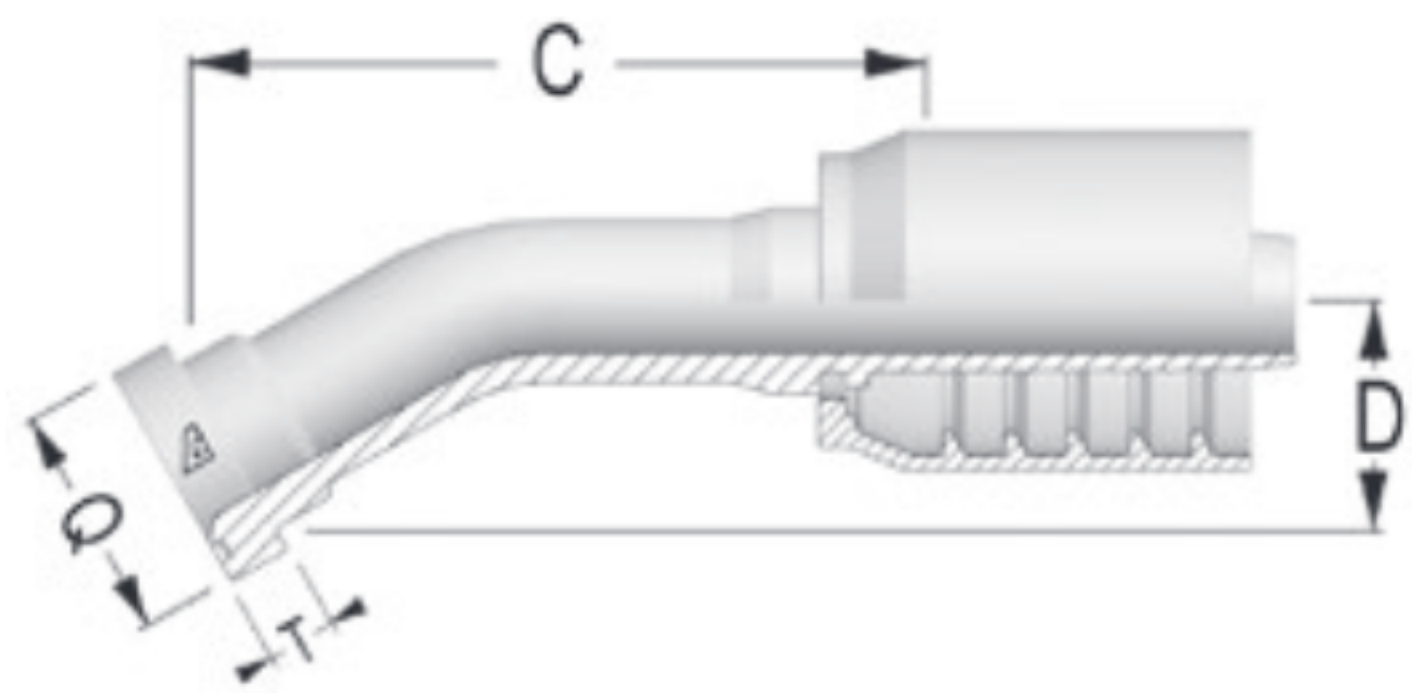

## 30° SUPERCAT FLANGE


*\*Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	Q Flange (in)	Q Flange (mm)	C Cut-Off Factor (mm)	T Thickness (mm)	D Drop (mm)	Flange Dash Size	Weight (lbs/each)
S-1212-CFL3	12	3/4	19.0	1.63	41.3	113	14.3	24.0	12	1.20
S-1216-CFL3	12	3/4	19.0	1.88	47.6	118	14.3	26.5	16	1.40
S-1616-CFL3	16	1	25.4	1.88	47.6	138	14.3	27.0	16	1.99
S-1620-CFL3	15	1	25.4	2.13	54.0	137	14.3	25.5	20	2.02
S-2020-CFL3	20	1 1/4	31.8	2.13	54.0	160	14.3	28.0	20	2.58
S-2024-CFL3	20	1 1/4	31.8	2.50	63.5	167	14.3	37.5	24	2.65

View Up To Date Info



SCAN OR VISIT  
[KOA.link/S-CFL3](https://KOA.link/S-CFL3)

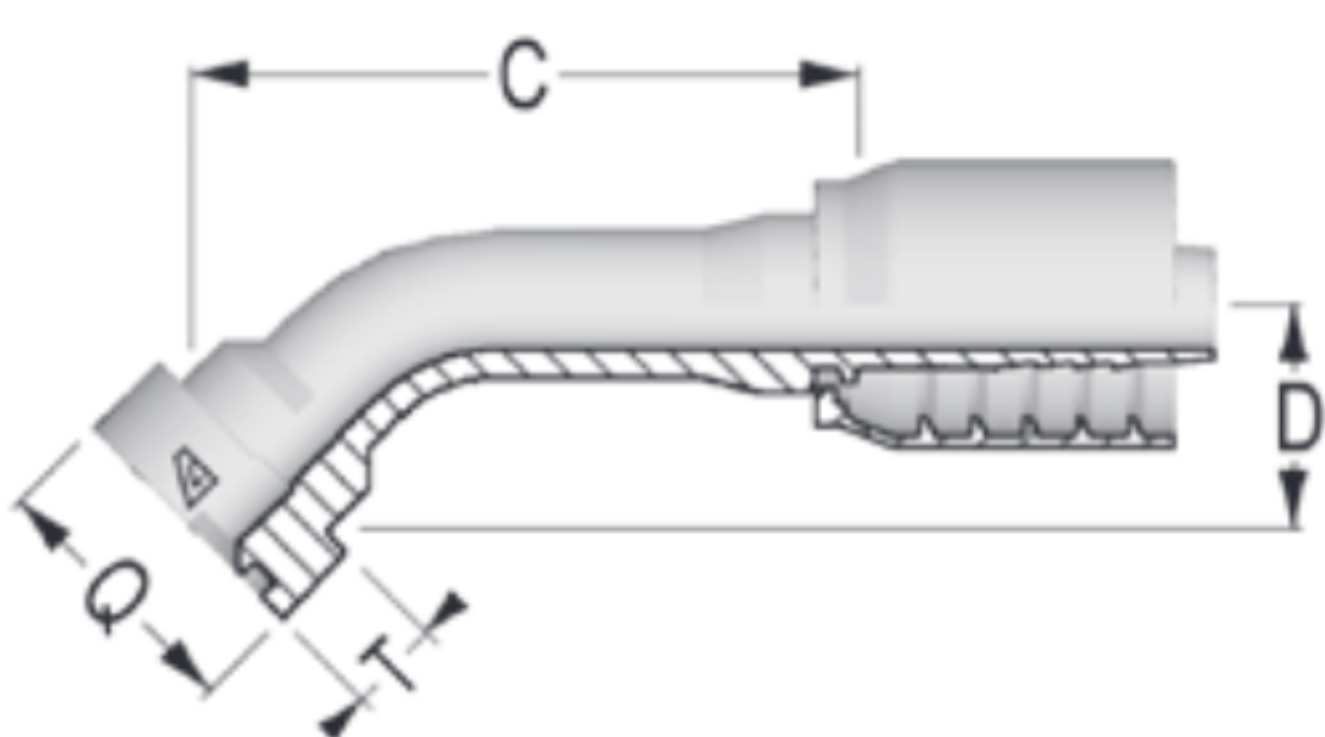

## 45° SUPERCAT FLANGE

*\*Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	Q Flange (in)	Q Flange (mm)	C Cut-Off Factor (mm)	T Thickness (mm)	D Drop (mm)	Flange Dash Size	Weight (lbs/each)
S-1212-CFL4	12	3/4	19.0	1.63	41.3	107	14.3	33.7	12	1.20
S-1216-CFL4	12	3/4	19.0	1.88	47.6	112	14.3	34.0	16	1.40
S-1616-CFL4	16	1	25.4	1.88	47.6	129	14.3	42.5	16	1.99
S-1620-CFL4	16	1	25.4	2.13	54.0	128	14.3	40.0	20	2.18
S-2020-CFL4	20	1 1/4	31.8	2.13	54.0	149	14.3	45.0	20	2.98
S-2024-CFL4	20	1 1/4	31.8	2.50	63.5	152	14.3	60.0	24	2.65
S-2424-CFL4	24	1 1/2	38.1	2.50	63.5	181	14.3	52.0	24	2.95
S-3232-CFL4	32	2	50.8	3.12	79.4	168	14.3	63.0	32	3.95

View Up To Date Info



SCAN OR VISIT  
[KOA.link/S-CFL4](https://KOA.link/S-CFL4)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.