


Two-Piece AlfaCrimp Fittings – Y Series

Interlock Inserts –  US End Configurations



View Up To Date Info

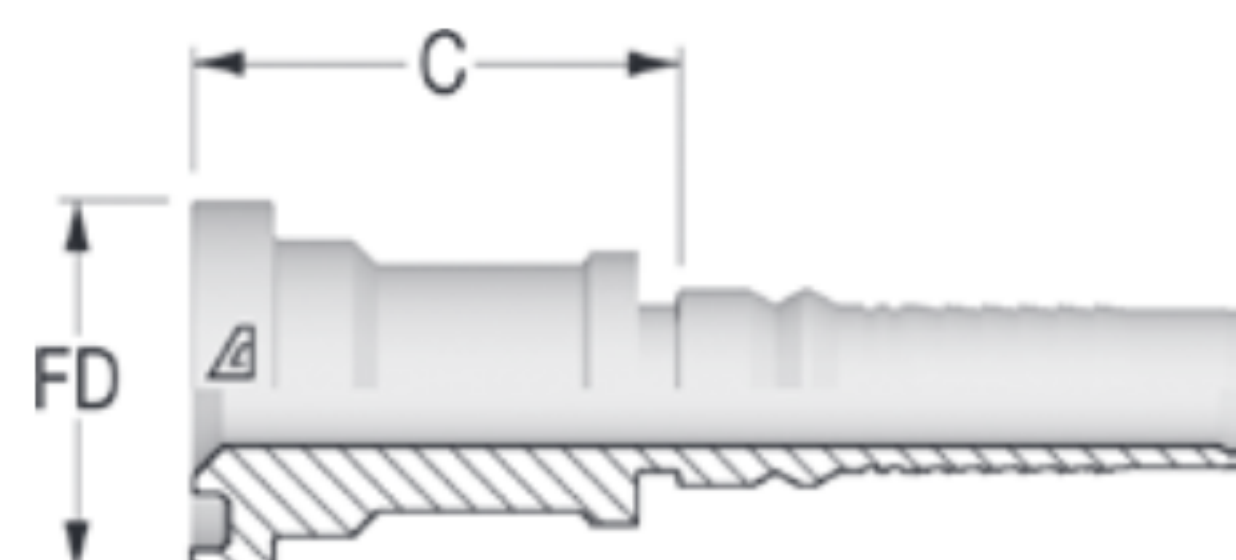


← SCAN OR VISIT
[KOA.link/
Y-C61S](https://koya.link/Y-C61S)

O-RING FLANGE SAE J518 CODE 61 INTERLOCK

**Preliminary Data*

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	Max Working Pressure (psi)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)			
Y-0808-C61S	08	1/2	12.7	1.19	30.2	39.0	5000	0.32
Y-1212-C61S	12	3/4	19.0	1.50	38.1	40.0	5000	0.50
Y-1616-C61S	16	1	25.4	1.75	44.5	49.0	5000	0.78
Y-2020-C61S	20	1 1/4	31.8	2.00	50.8	52.7	4000	1.09
Y-2424-C61S	24	1 1/2	38.1	2.38	60.3	56.0	3000	1.42
Y-3232-C61S	32	2	50.8	2.81	71.4	69.0	3000	2.62

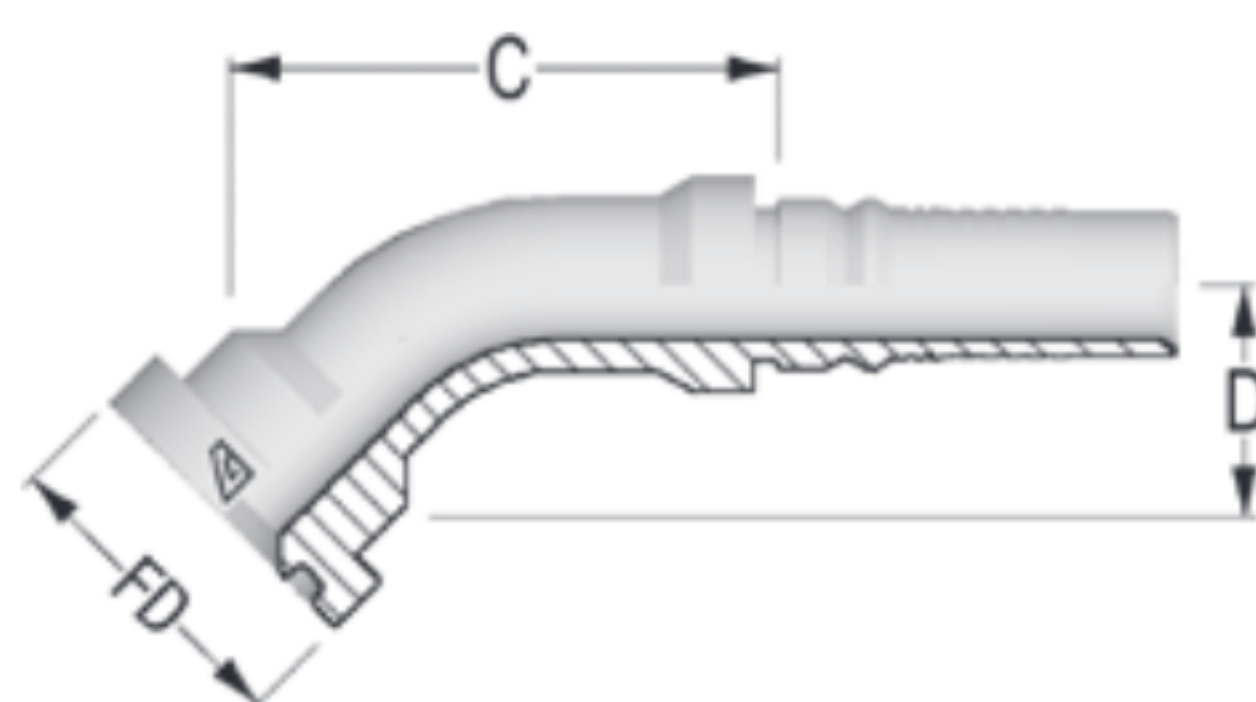

View Up To Date Info



← SCAN OR VISIT
[KOA.link/
Y-C614](https://koya.link/Y-C614)

45° O-RING FLANGE SAE J518 CODE 61 INTERLOCK

**Preliminary Data*

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	D Drop (mm)	Max Working Pressure (psi)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)				
Y-0808-C614	08	1/2	12.7	1.19	30.2	51.0	22.0	5000	0.39
Y-1212-C614	12	3/4	19.0	1.50	38.1	68.0	25.0	5000	0.62
Y-1616-C614	16	1	25.4	1.75	44.5	82.5	29.0	5000	0.83
Y-2020-C614	20	1 1/4	31.8	2.00	50.8	100.9	32.5	4000	1.58
Y-2424-C614	24	1 1/2	38.1	2.38	60.3	103.7	43.0	3000	1.98
Y-3232-C614	32	2	50.8	2.81	71.4	138.1	54.0	3000	3.82

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.