


Two-Piece AlfaCrimp Fittings – Y Series

Interlock Inserts –  International End Configurations

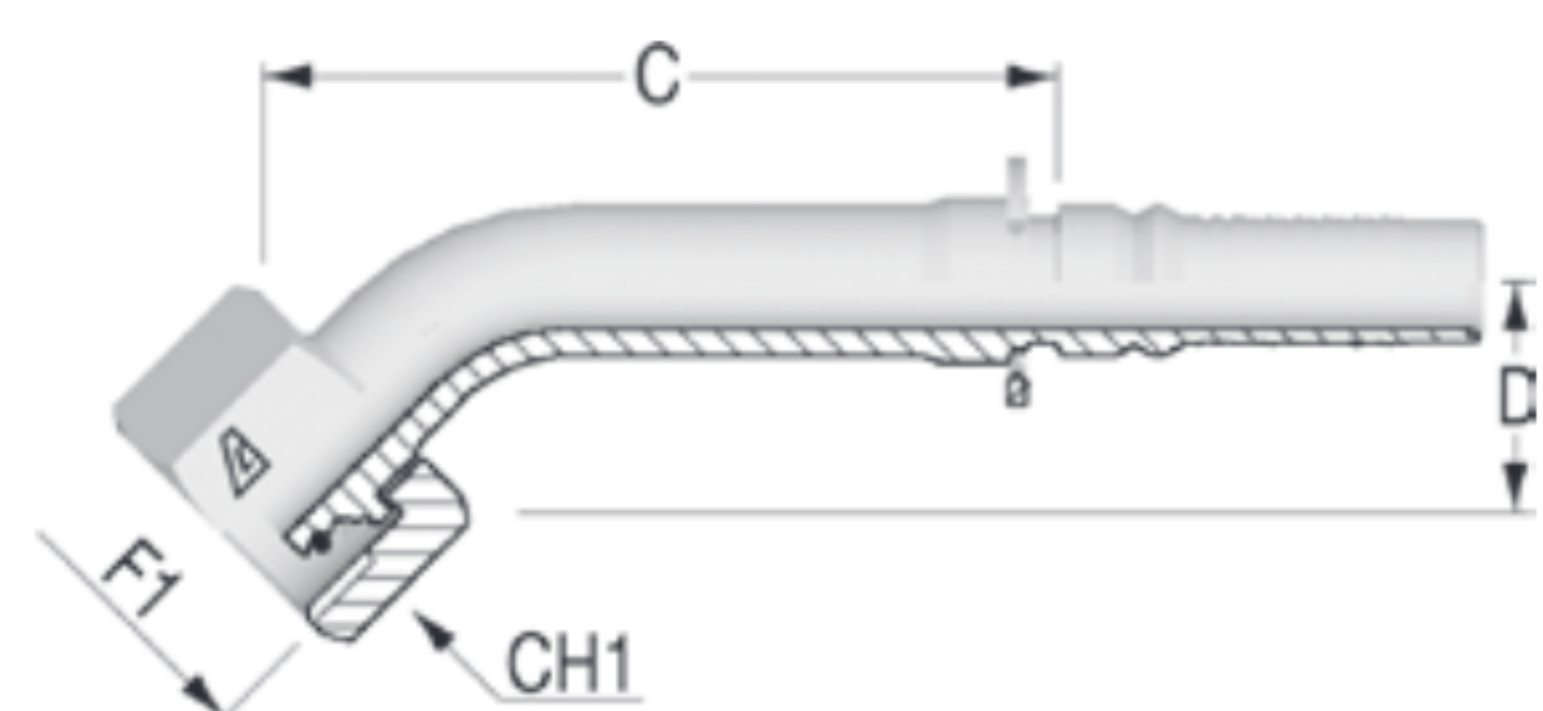

45° METRIC FEMALE O-RING SWIVEL – DIN 3865 HEAVY


**Preliminary Data*

Part Number	Dash Size	Hose ID Size (in) (mm)	F Thread Size (mm) x TP (mm)	Tube OD (mm)	C Cut-Off Factor (mm)	D Drop (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
Y-0824-FM4H	08	1/2 12.7	M24x 1.5	16	59.0	29.0	30	0.46
Y-1030-FM4H	10	5/8 25.9	M30x 2	20	59.0	31.5	36	0.58
Y-1230-FM4H	12	3/4 19.0	M30x 2	20	74.0	33.0	36	0.79
Y-1236-FM4H	12	3/4 19.0	M36x 2	25	78.1	36.0	46	1.07
Y-1636-FM4H	16	1 25.4	M36x 2	25	86.5	37.5	46	1.36
Y-1642-FM4H	16	1 25.4	M42x 2	30	96.8	38.0	50	1.59
Y-2052-FM4H	20	1 1/4 31.8	M52x 2	38	113.0	48.0	60	2.59
Y-2452-FM4H	24	1 1/2 38.1	M52x 2	38	111.0	44.0	60	2.82

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
Y-FM4H](https://KOA.link/Y-FM4H)

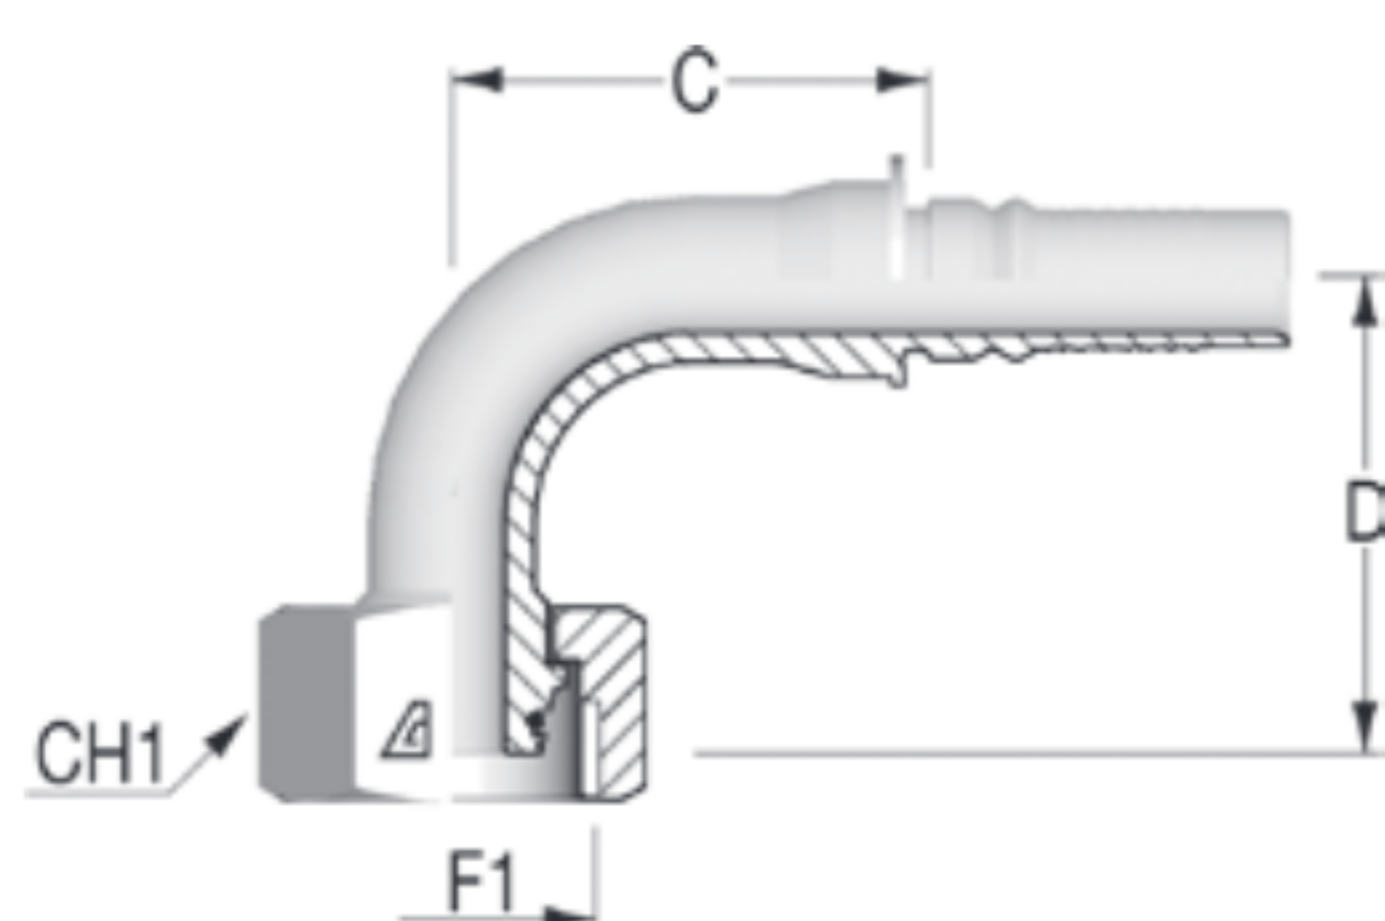

90° METRIC FEMALE O-RING SWIVEL – DIN 3865 HEAVY

**Preliminary Data*

Part Number	Dash Size	Hose ID Size (in) (mm)	F Thread Size (mm) x TP (mm)	Tube OD (mm)	C Cut-Off Factor (mm)	D Drop (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
Y-0824-FM9H	08	1/2 12.7	M24x 1.5	16	55.0	50.0	30	0.43
Y-1030-FM9H	10	5/8 25.9	M30x 2	20	48.0	55.0	36	0.64
Y-1230-FM9H	12	3/4 19.0	M30x 2	20	61.0	67.5	36	0.92
Y-1236-FM9H	12	3/4 19.0	M36x 2	25	61.7	65.0	46	1.17
Y-1636-FM9H	16	1 25.4	M36x 2	25	76.5	82.0	46	1.56
Y-1642-FM9H	16	1 25.4	M42x 2	30	86.4	79.0	50	1.62
Y-2052-FM9H	20	1 1/4 31.8	M52x 2	38	90.9	101.0	60	2.97
Y-2452-FM9H	24	1 1/2 38.1	M52x 2	38	100.5	102.0	60	3.15

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
Y-FM9H](https://KOA.link/Y-FM9H)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.