


LHS

LHS Series
Long Round Hole Strainer



THS

THS Series
Top Hole Strainer

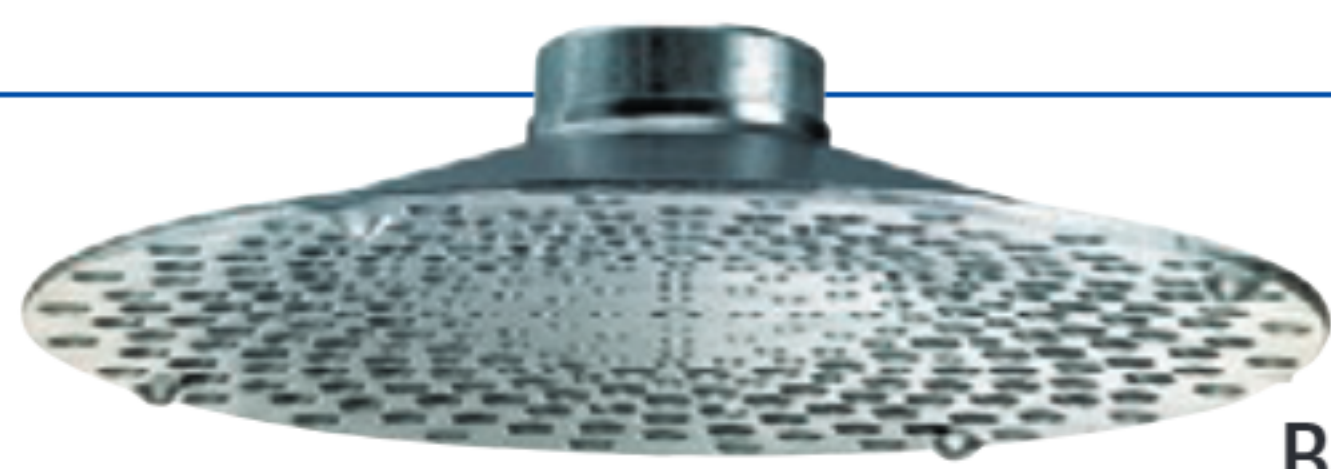

BHS

BHS Series
Bottom Hole Strainer

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/xHS

FEATURES AND ADVANTAGES

- Designed for use in suction hose applications to protect the pump from clogging.
- Zinc plated to help with rust and corrosion.
- NPSM threads connect with combination nipples used in hose assemblies.

MATERIAL SPECIFICATIONS

- AISI 1008.

| Part Number | Size (in) | Hole Size (in) | Weight Each (lbs) | Standard Carton |
|-------------|-----------|----------------|-------------------|-----------------|
| LHS150 | 1 1/2 | 0.362 | 0.75 | 30 |
| LHS200 | 2 | 0.362 | 0.94 | 25 |
| LHS300 | 3 | 0.374 | 2.00 | 16 |

| Part Number | Size (in) | Hole Size (in) | Weight Each (lbs) | Standard Carton |
|-------------|-----------|----------------|-------------------|-----------------|
| THS150 | 1 1/2 | 0.354 | 1.64 | 25 |
| THS200 | 2 | 0.354 | 2.00 | 20 |
| THS300 | 3 | 0.354 | 2.68 | 15 |

| Part Number | Size (in) | Hole Size (in) | Weight Each (lbs) | Standard Carton |
|-------------|-----------|----------------|-------------------|-----------------|
| BHS150 | 1 1/2 | 0.315 | 1.64 | 20 |
| BHS200 | 2 | 0.315 | 2.00 | 20 |
| BHS300 | 3 | 0.315 | 2.68 | 15 |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.