




GJS

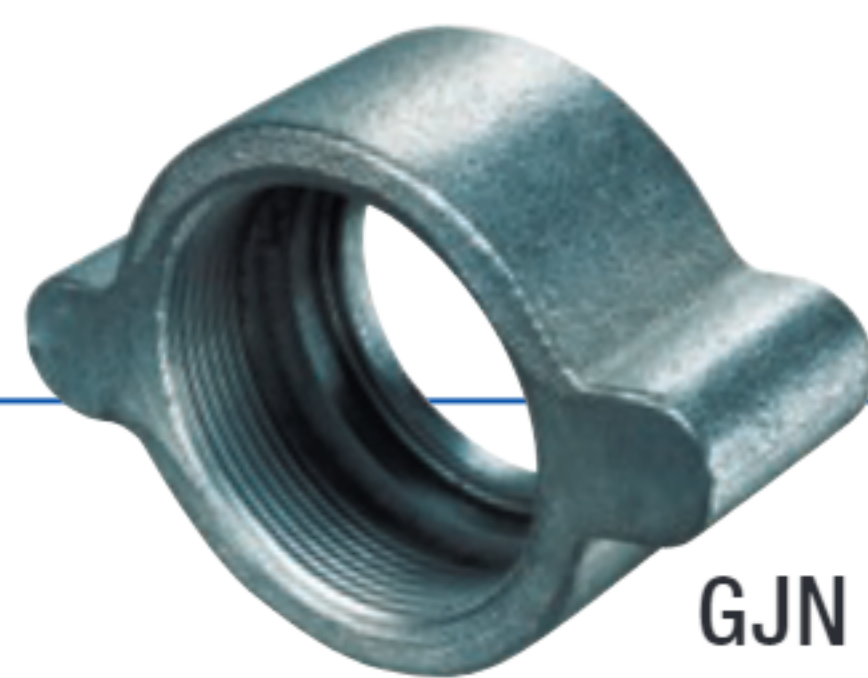

GJN

GJS Series

Hose Stem used in combination with GJN series wing nut

GJN Series

Wing Nut with NPS threads

VIEW ONLINE



SCAN FOR INFO

or visit

KOA.link/GJS-GJN

FEATURES AND ADVANTAGES

- Designed for use in medium to high-pressure applications using steam, air, and fluids.
- The metal-to-metal design provides for optimum sealing at high temperatures.
- Used in conjunction with interlocking bolt clamps.
- Couplings with hose barbs come with an interlocking collar to connect with the interlocking bolt clamps.
- Couplings with wing nut female NPS threads connect with male NPS threaded adapters known as spuds. Spuds come with multiple threaded options on the other end, and a copper seal for optimum sealing.

MATERIAL SPECIFICATIONS

- Ductile iron plated.
- ASTM A536, Grade 65/45/12.

MAXIMUM SERVICE TEMPERATURE

+450°F (+232°C)

Part Number	Size (in)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs)	Standard Carton
GJS-050	1/2	600	250	600	0.18	200
GJS-075	3/4	600	250	600	0.55	100
GJS-100	1	600	250	400	0.81	100
GJS-125	1 1/4	600	250	400	1.17	32
GJS-150	1 1/2	600	250	350	1.30	35
GJS-200	2	600	250	300	1.72	25
GJS-250	2 1/2	450	250	300	3.70	10
GJS-300	3	450	250	300	4.83	8
GJS-400	4	450	250	300	8.95	4
GJN-050	1/2	600	250	600	0.31	200
GJN-075	3/4	600	250	600	0.71	60
GJN-100	1	600	250	600	0.71	60
GJN-125	1 1/4	600	250	600	1.52	40
GJN-150	1 1/2	600	250	600	1.52	40
GJN-200	2	600	250	600	2.54	24
GJN-250	2 1/2	450	250	400	4.65	10
GJN-300	3	450	250	400	5.51	10
GJN-400	4	450	250	400	10.63	4

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.