


POFFJS



POFFJS  
Dual Angle

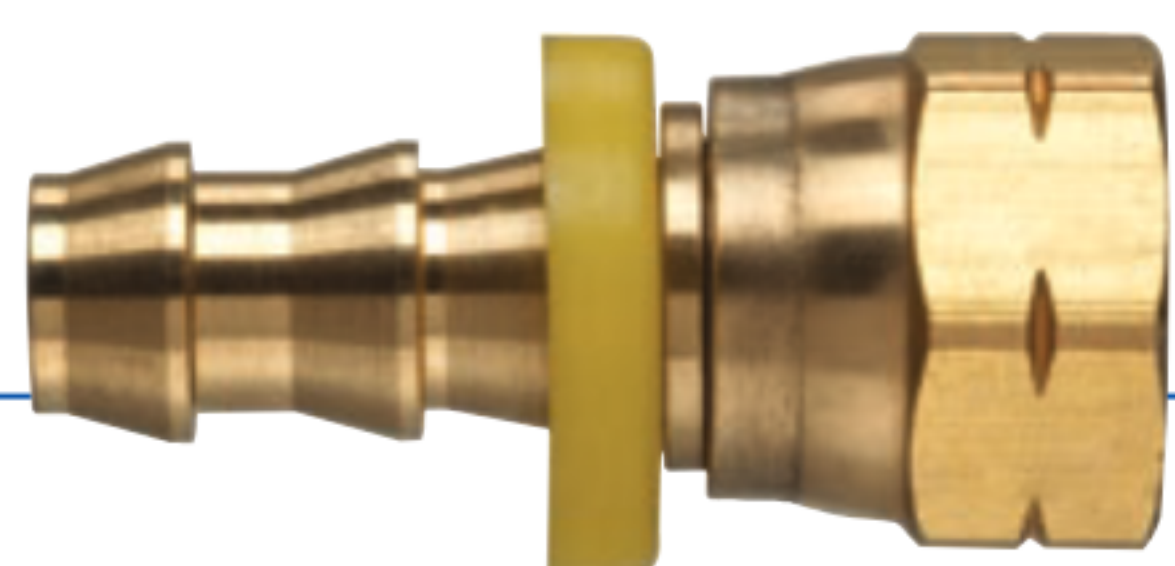

POFFSA

## Push-On Fittings

### POFFJS Series

Female JIC 37° Flare Swivel x Push-On Barb

Female JIC 37°/SAE 45° Flare Swivel x Push-On Barb,  
Dual Angle 1/4", 1/2", 5/8"

### POFFSA Series

Female SAE 45° Flare Swivel x Push-On Barb

#### VIEW ONLINE



SCAN FOR INFO

or visit

[KOA.link/  
POFFJS-POFFSA](http://KOA.link/POFFJS-POFFSA)

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.

#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

Part Number	Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFFJS-0606	3/8	UNF	9/16 - 18	300	0.064	50
POFFJS-1212	3/4	UNF	1 1/16 - 12	300	0.220	25
POFFJS-0404	1/4	UNF	7/16 - 20	300	0.040	100
POFFJS-0808	1/2	UNF	3/4 - 16	300	0.097	25
POFFJS-0810	1/2	UNF	7/8 - 14	300	0.130	25
POFFJS-1010	5/8	UNF	7/8 - 14	300	0.172	25

Part Number	Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFFSA-0606	3/8	UNF	9/16 - 18	300	0.071	100
POFFSA-1212	3/4	UNF	1 1/16 - 12	300	0.262	25

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.