


POFMSA

Push-On Fittings

POFMSA Series

Male SAE 45° Flare x Push-On Barb

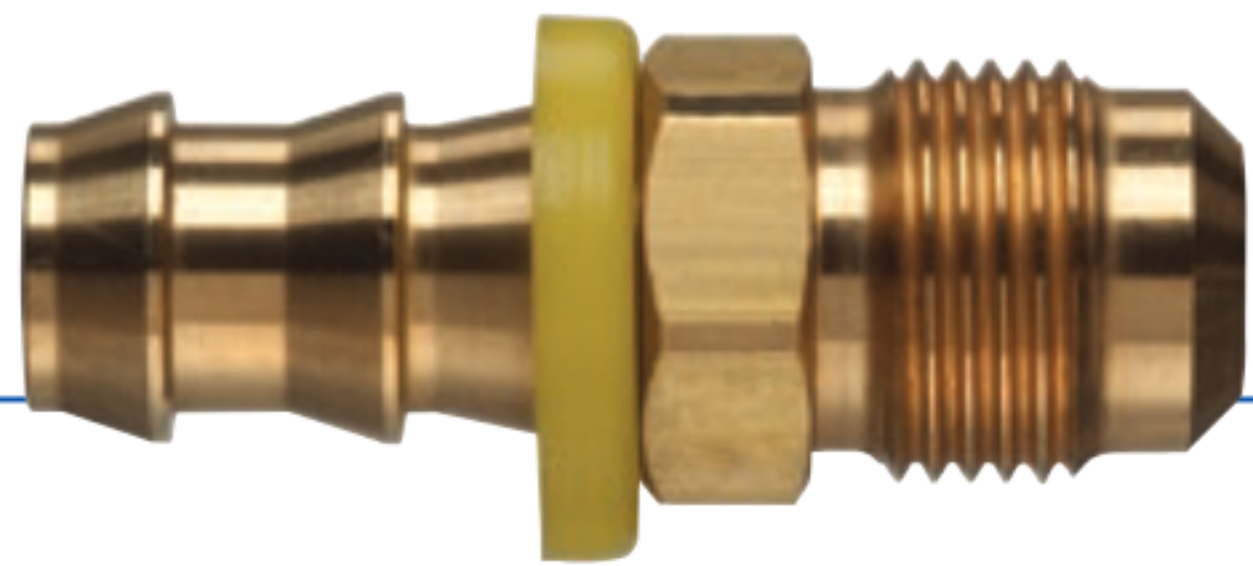

POFMJS

POFMJS Series

Male JIC 37° Flare x Push-On Barb

VIEW ONLINE



SCAN FOR INFO
or visit
[KOA.link/
POFMSA-POFMJS](https://KOA.link/POFMSA-POFMJS)

FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.

MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

Part Number	Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFMSA-0404	1/4	UNF	7/16 - 20	300	0.029	100
POFMSA-0606	3/8	UNF	9/16 - 18	300	0.071	50
POFMSA-0808	1/2	UNF	3/4 - 16	300	0.112	50

Part Number	Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFMJS-0404	1/4	UNF	7/16 - 20	300	0.035	100
POFMJS-0606	3/8	UNF	9/16 - 18	300	0.060	50
POFMJS-0808	1/2	UNF	3/4 - 16	300	0.121	50
POFMJS-1212	3/4	UNF	1 1/16 - 12	300	0.291	25

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.