




FL-AL-A

## FL-AL-A Series (Aluminum)

Male Coupler x 150# ASA Flange

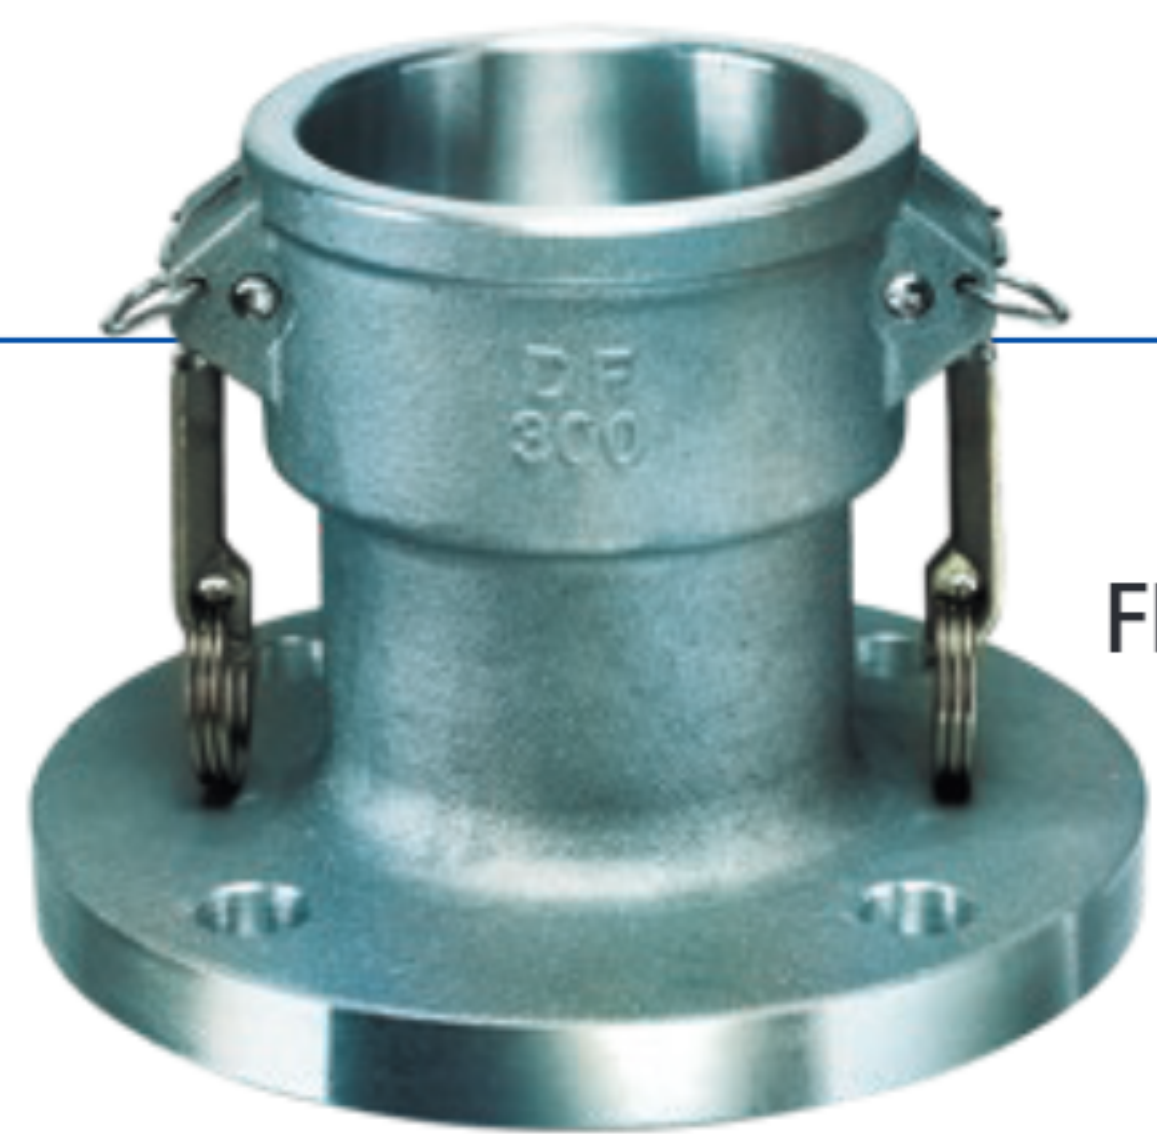

FL-AL-D

## FL-AL-D Series

(Aluminum Part D x Flange)

Female Coupler X 150# ASA Flange

**VIEW ONLINE**



SCAN FOR INFO  
or visit  
[KOA.link/FL-AL](http://KOA.link/FL-AL)

### GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

### FEATURES AND ADVANTAGES

- High quality design made to withstand rigorous applications found in industrial markets.
- Aluminum alloy specially designed for high tensile strength and impact resistance.
- Supplied with forged brass handles which results in less wear on connecting parts. (FL-AL-D only)

### MATERIAL SPECIFICATIONS

- ASTM aluminum alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.

### MATERIAL SPECIFICATIONS (FL-AL-D ONLY)

- Forged brass handles.
- Zinc-plated carbon steel handle pins, pull rings and safety clips.
- Buna-N gasket included.

Part Number	Size (in)	Number Bolt Holes	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
FL-AL-A200	2	4	250	B85 Grade 383	3.05	6
FL-AL-A300	3	4	150	B85 Grade 383	3.86	4
FL-AL-A400	4	8	150	B85 Grade 383	5.86	3
FL-AL-A600	6	8	75	B85 Grade 383	9.92	2
FL-AL-A800	8	8	50	B108-92 356	14.50	1
FL-AL-A800	8	8	50	B108-92 356	14.50	1

Part Number	Size (in)	Number Bolt Holes	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
FL-AL-D200	2	4	250	B85 Grade 383	2.35	4
FL-AL-D300	3	4	150	B85 Grade 383	5.07	3
FL-AL-D400	4	8	150	B85 Grade 383	7.94	2
FL-AL-D600	6	8	75	B85 Grade 383	12.89	1
FL-AL-D800	8	8	50	B108-92 356	16.50	1

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.