


## DD-SS Series (316 Stainless Part D x D) Female Coupler X Female Coupler



**VIEW ONLINE**

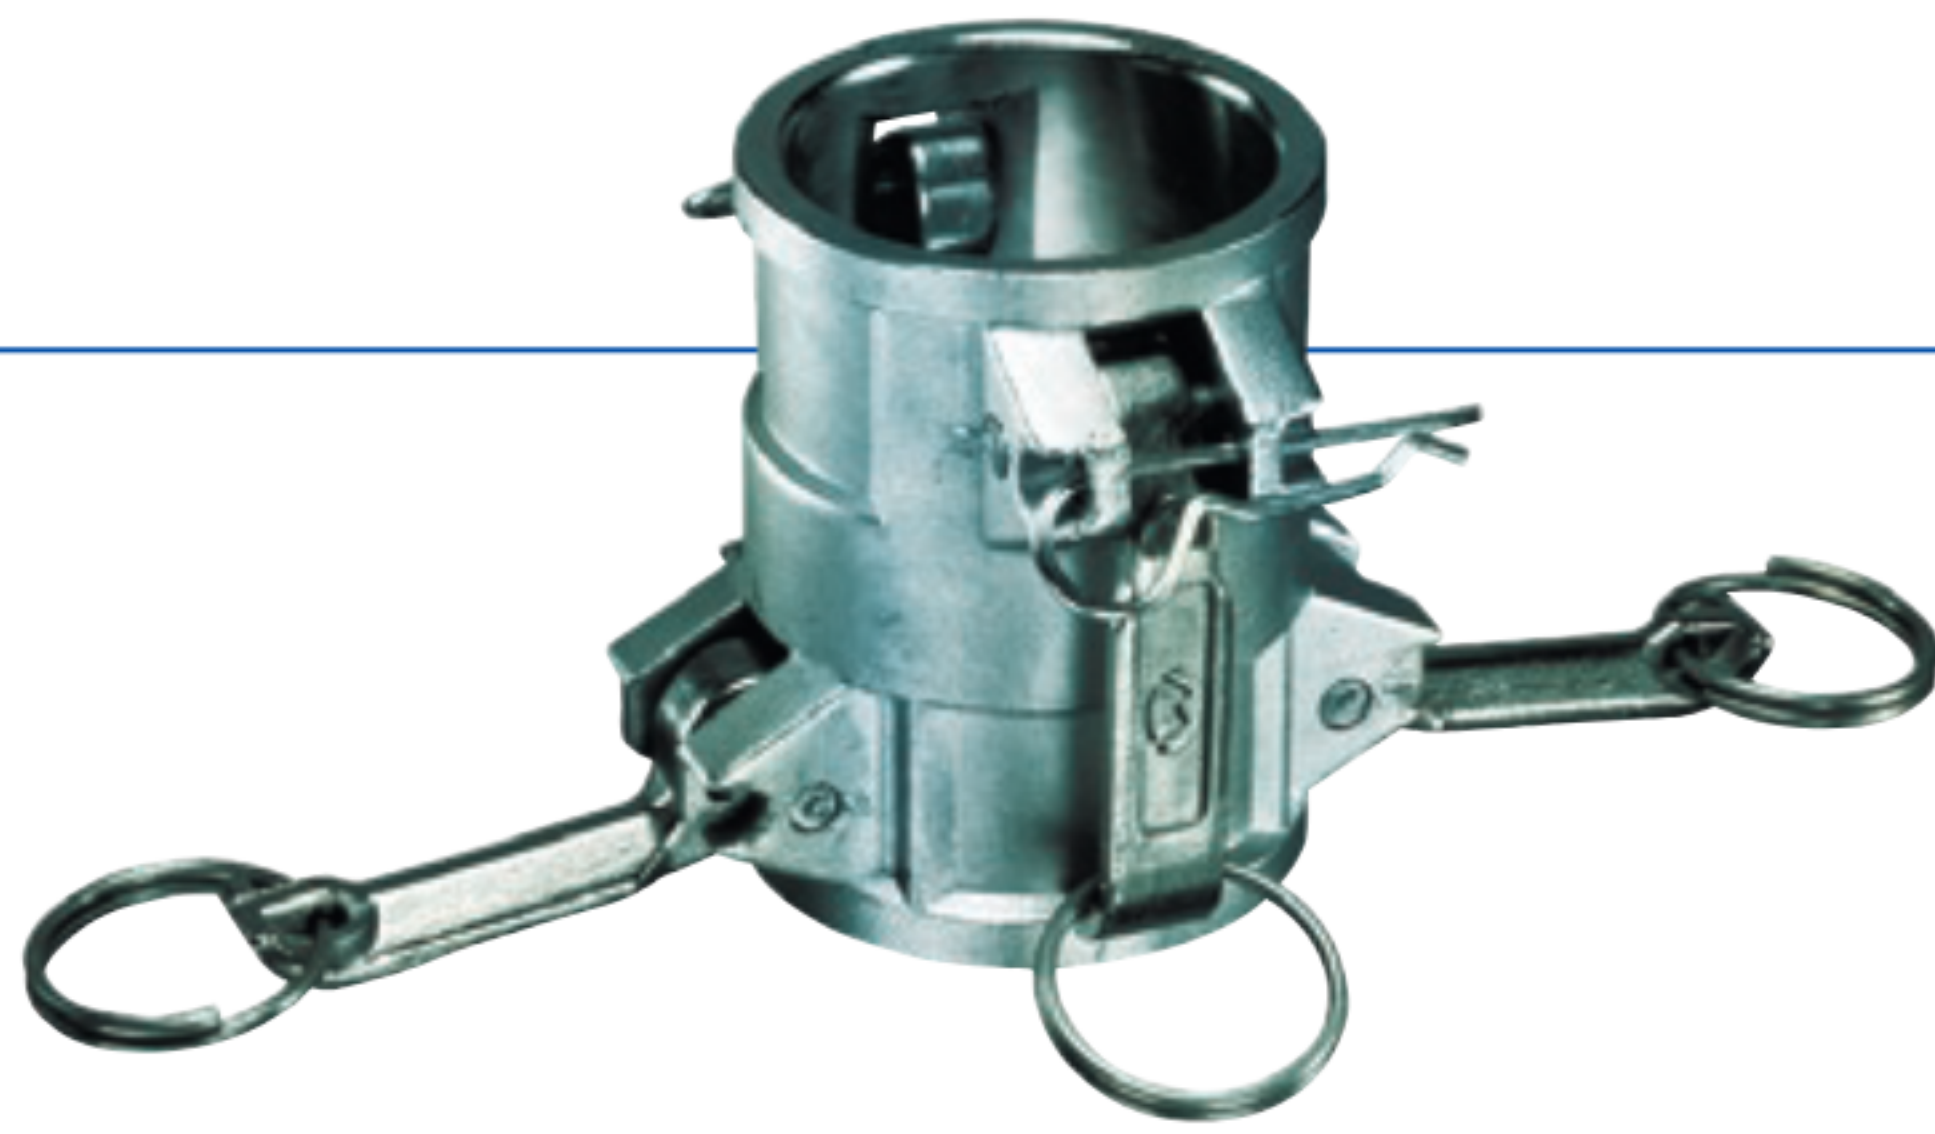

SCAN FOR INFO

or visit

[KOA.link/DD-SS](https://koa.link/DD-SS)

### GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

### FEATURES AND ADVANTAGES

- High quality design made to withstand rigorous applications found in industrial markets.
- Stainless steel alloy is analyzed on every melt, and specially designed for high tensile strength, rigidity, and impact resistance.

### MATERIAL SPECIFICATIONS

- ASTM stainless steel alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- 304 stainless steel handles, handle pins, pull rings, and safety clips.
- Buna-N gasket included.

Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
DD-SS150	1 1/2	250	A666/316	2.10	20
DD-SS200	2	250	A666/316	2.89	12
DD-SS300	3	150	A666/316	5.11	6
DD-SS400	4	150	A666/316	6.66	5

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.