


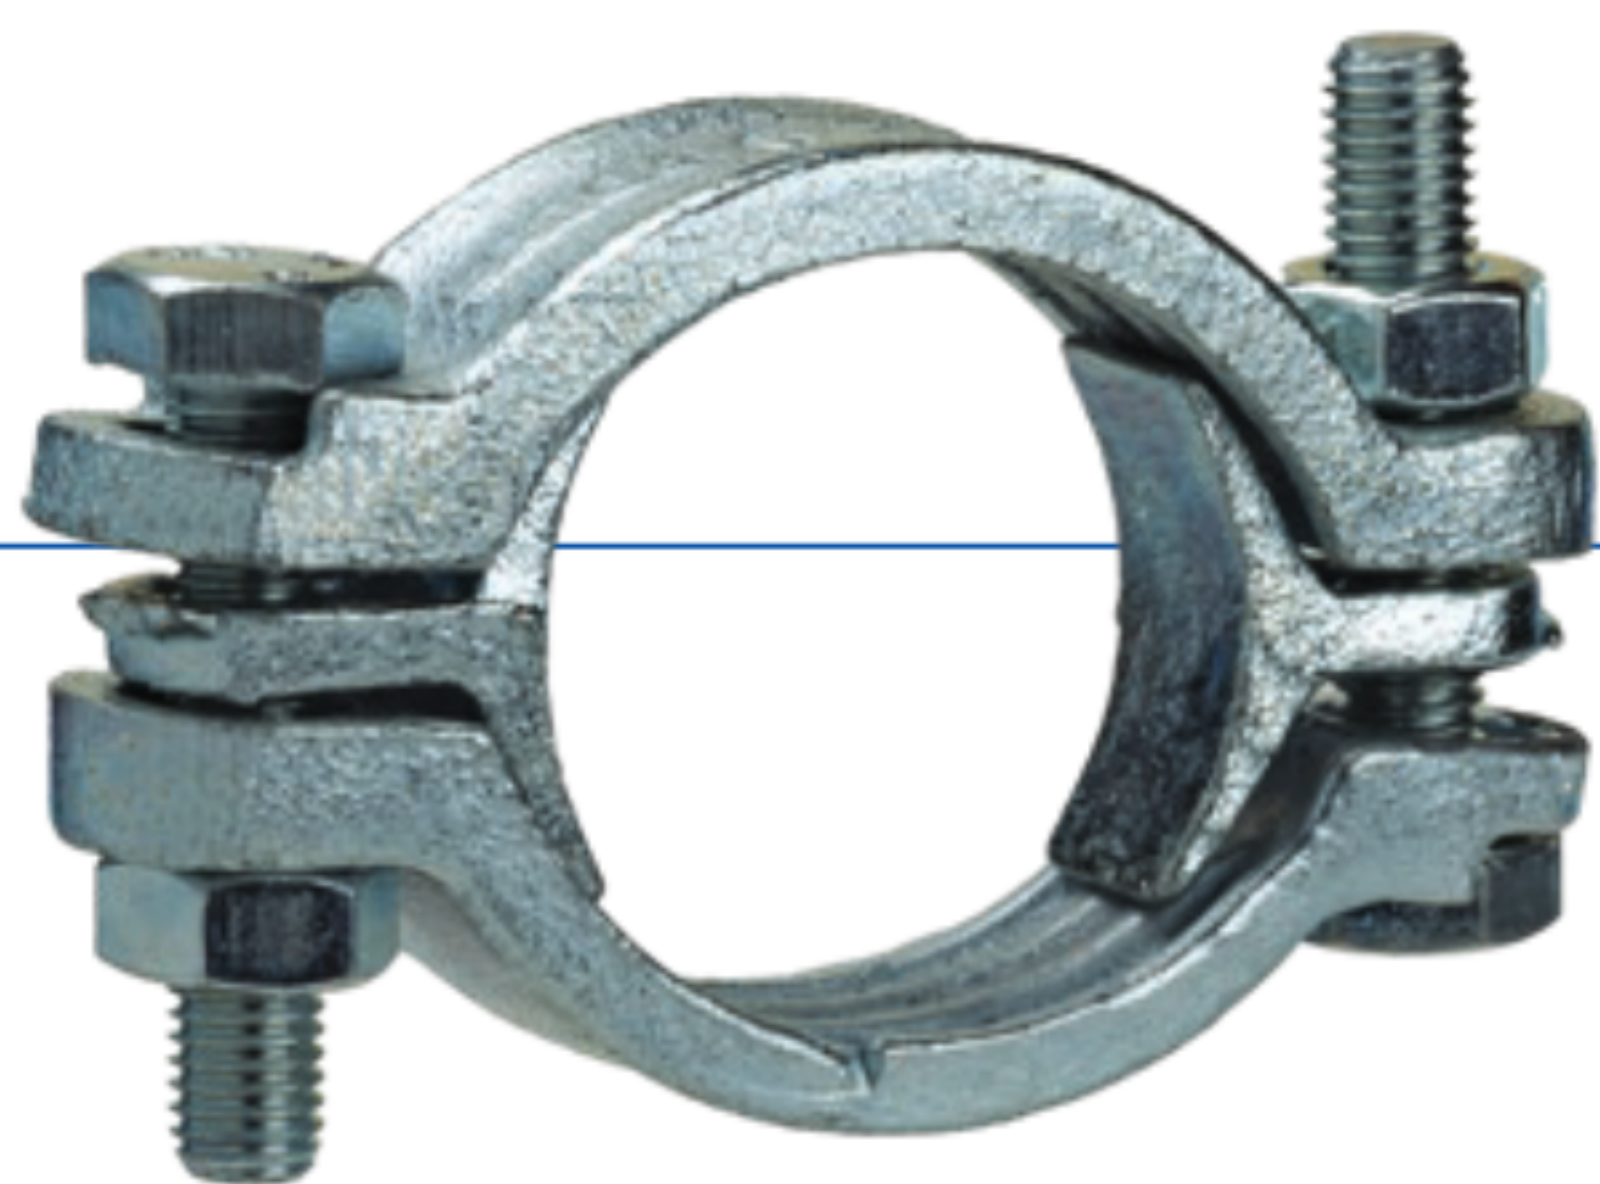

DB Series *(Zinc Plated Ductile Iron)* Double Bolt Clamp

FEATURES AND ADVANTAGES

- Design provides for an efficient means of securing couplings and fittings to hoses.
- Double tongue saddles provided to fill the gap between the bolt lugs preventing pinching of the outside of the hose.
- Fully tightened, the clamps secure the full circumference of the hose.

VIEW ONLINE



SCAN FOR INFO
or visit
[KOA.link/DB](https://koya.link/DB)

Part Number	Size Range (in)	Maximum Torque (ft lbs)	Weight Each (lbs)	Standard Carton
DB29	7/8 - 1 9/64	20	0.29	200
DB34	1 5/32 - 1 11/32	20	0.31	200
DB40	1 5/16 - 1 19/32	20	0.43	100
DB49	1 5/8 - 1 15/16	20	0.56	100
DB60	1 7/8 - 2 3/8	20	0.64	60
DB76	2 3/8 - 3 7/16	40	0.73	60
DB94	3 1/32 - 3 11/16	40	1.30	40
DB115	3 3/4 - 4 1/2	40	1.68	20
DB400	3 1/2 - 4	40	1.54	30
DB431	3 25/32 - 4 1/16	40	2.13	30
DB463	4 1/16 - 4 7/16	40	1.79	30
DB525	4 3/16 - 5	60	2.14	20
DB550	4 7/16 - 5 3/16	60	2.27	20
DB600	5 1/2 - 5 7/8	60	2.65	20
DB639	5 11/16 - 5 15/16	60	2.80	20
DB675	6 1/8 - 6 7/8	60	2.98	20
DB769	6 15/16 - 7 5/8	60	3.81	10
DB818	7 11/16 - 8 3/16	125	5.11	10
DB875	8 1/4 - 8 7/8	125	5.64	10
DB988	8 15/16 - 9 7/8	125	6.15	10
DB1125	9 15/16 - 11 3/8	125	9.48	4
DB1275	11 3/16 - 13	125	9.61	4
DB1360	12 3/16 - 14	200	15.43	3
DB1450	13 3/16 - 15	200	16.74	3
DB1700	15 1/16 - 17 1/2	260	22.13	1

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

