


KBEE™ Series Polyethylene Hose Guard



VIEW ONLINE

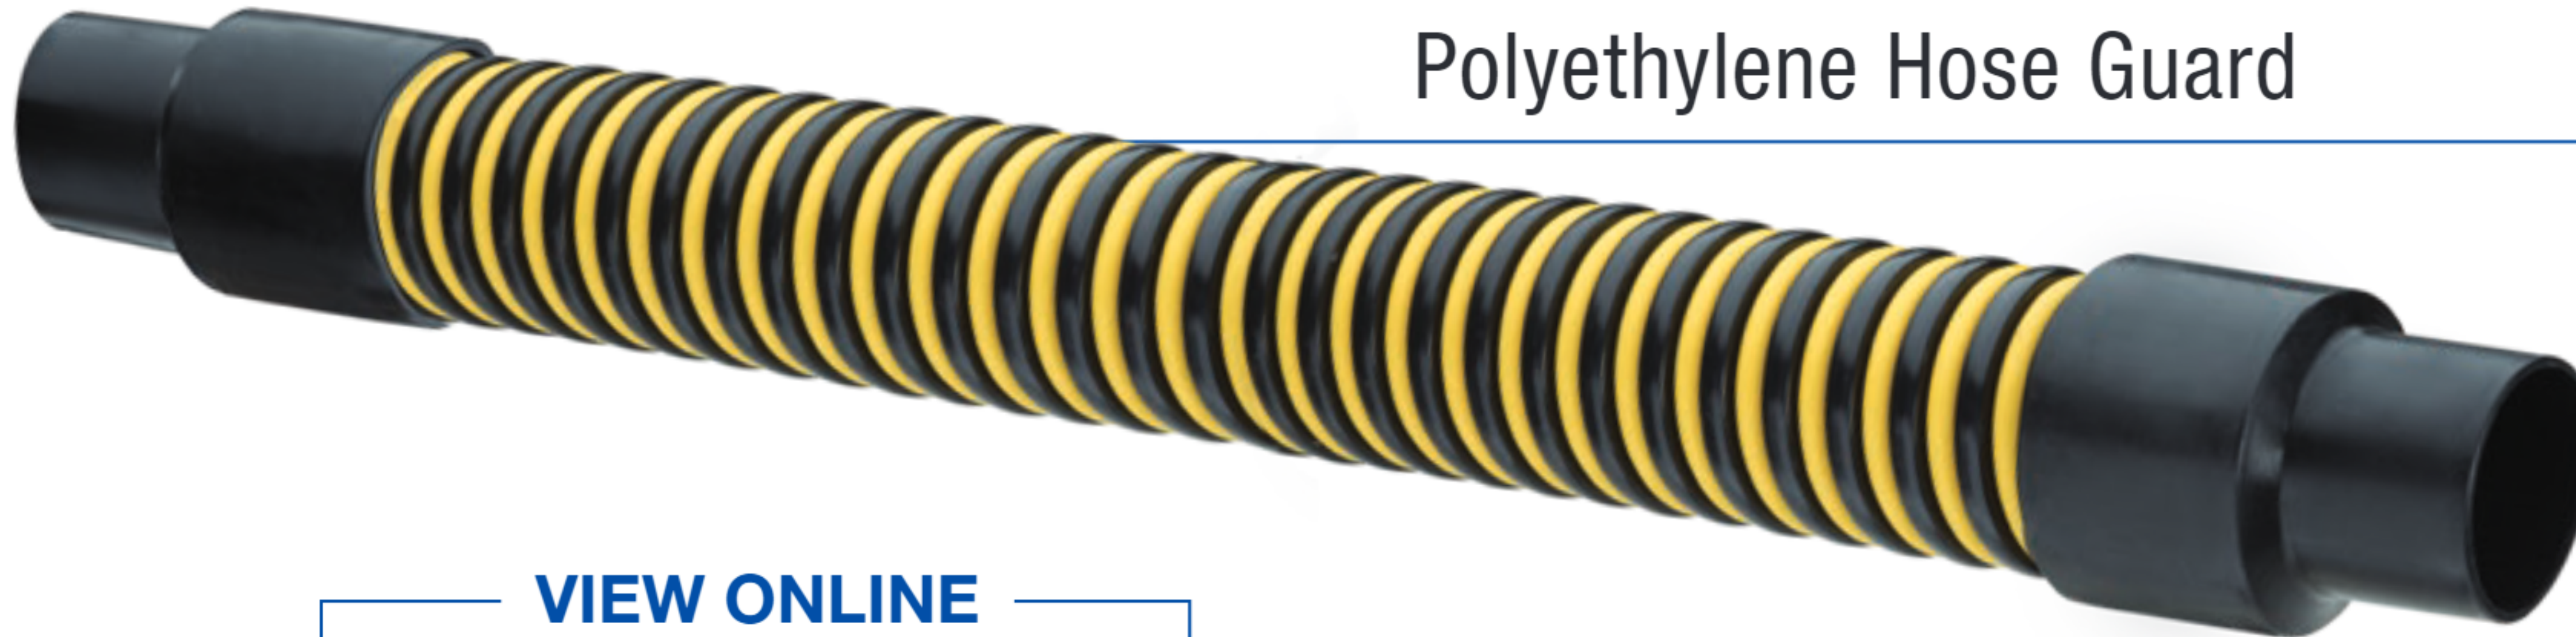

SCAN FOR INFO
or visit
KOA.link/KBEE

GENERAL APPLICATIONS

- Protection of high pressure sewer jetting hoses

CONSTRUCTION

Flexible polyethylene (LDPE) tube with polyethylene (LDPE) ribs and cuffed ends.

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +150°F (+65°C)*

*Actual service temperature range is application dependent.

FEATURES AND ADVANTAGES

- **Easy Slide Interior** – Low coefficient of friction polyethylene tube allows for sewer jetting hoses to slide through easily, protecting them from wear.
- **“Cold-Flex” Materials** – Remains flexible in sub-zero temperatures.
- **Crush Resistant** – Will spring back to original shape after being crushed, will not kink!
- **Easy Slide Helix** – Exposed ribs protect tube from cover wear, and allow hose to slide easily over rough surfaces. Easy-to-handle.
- **Leak Proof Cuffs** – Overmolded cuffs will not separate from the hose guard. Each cuff and unit is 100% factory tested.

Part Number	ID		OD		Working Pressure at 68°F (psi)	Vacuum Rating Hg at 68°F (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)					
KBEE2X3	2	50.8	2.76	70.1	15	29	3.5	3	2.55
KBEE3X3	3	76.2	4.06	103.1	7	29	6.5	3	4.80

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.



KBC™ Series King Bee™ Collar Clamp with 20' Rope

- Available in carbon steel or corrosion resistant stainless steel



(Hose sold separately)

Part Number	ID (in)	Material	Weight (lbs)
KBC-CS300	3	Carbon Steel	0.64
KBC300	3	Stainless Steel	0.67

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.