


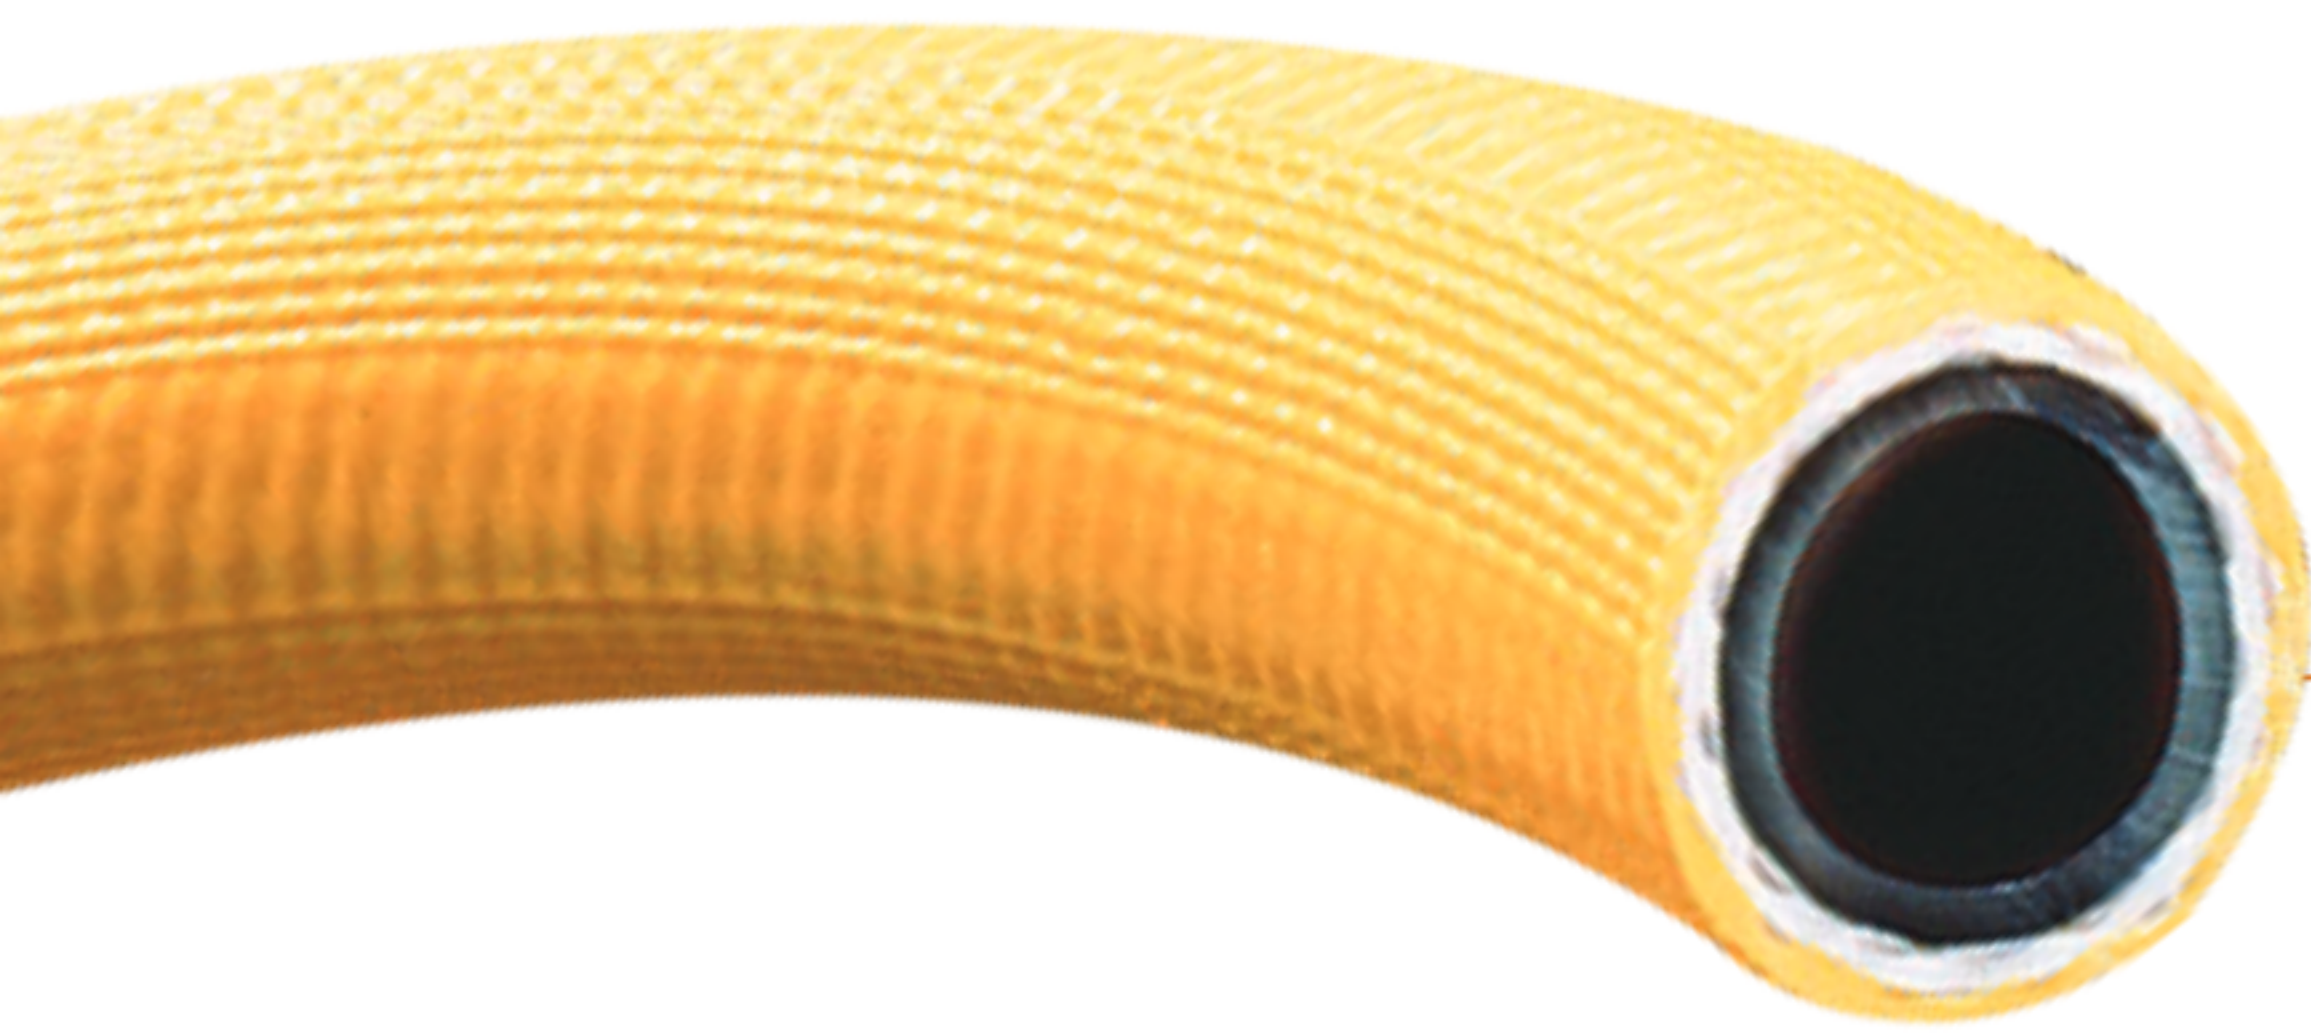

A1661 Series

600 PSI PVC/Polyurethane Blend Reinforced Spray Hose

GENERAL APPLICATIONS

- Agricultural spraying
- Commercial weed spraying
- Pest control spraying

CONSTRUCTION

- **Tube** – Phthalate free black PVC/Polyurethane blend
- **Reinforcement** – Two layer high tensile strength yarn two-pass spiral construction
- **Cover** – Phthalate free corrugated PVC

SERVICE TEMPERATURE RANGE

+15°F (-10°C) to +160°F (+70°C)

View Up To Date Info



◀ SCAN OR VISIT

**KOA.link/
A1661**



MADE IN NORTH AMERICA

FEATURES AND ADVANTAGES

- **Chemical Resistance** – PVC/Polyurethane blended core provides better chemical resistance than comparable all PVC tubing. (See Chemical Resistance Guide.)
- **Corrugated Cover** – Reduces cover contact and friction with ground, allowing for the hose to be dragged with greater ease.
- **Kink Resistant** – Extremely tough, kink resistant construction.
- **Pin-Pricked Cover** – Vents trapped vapors to help prevent hose “ballooning”.

Series Number	Size Code	ID		OD		Max. Working Pressure [†] (psi)		Standard Length (ft)	Weight per Pkg. (lbs)
		(in)	(mm)	(in)	(mm)	at 70°F (20°C)	at 122°F (50°C)		
A1661	06	3/8	9.5	0.650	16.5	600	350	300/400	41/54
A1661	08	1/2	12.7	0.790	20.1	600	350	300/400	57/76
A1661	10	5/8	15.9	1.030	26.2	600	300	300	96
A1661	12	3/4	19.1	1.170	29.7	600	300	300	126

NOTES:

- † Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.
- Use of hydraulic or reusable-type fittings are not recommended for coupling Kuri Tec[®] hose products. Claims involving use of these fittings will be disallowed.

COMPLIANCES (for details see page 91)

Phthalate Free [13]

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.