


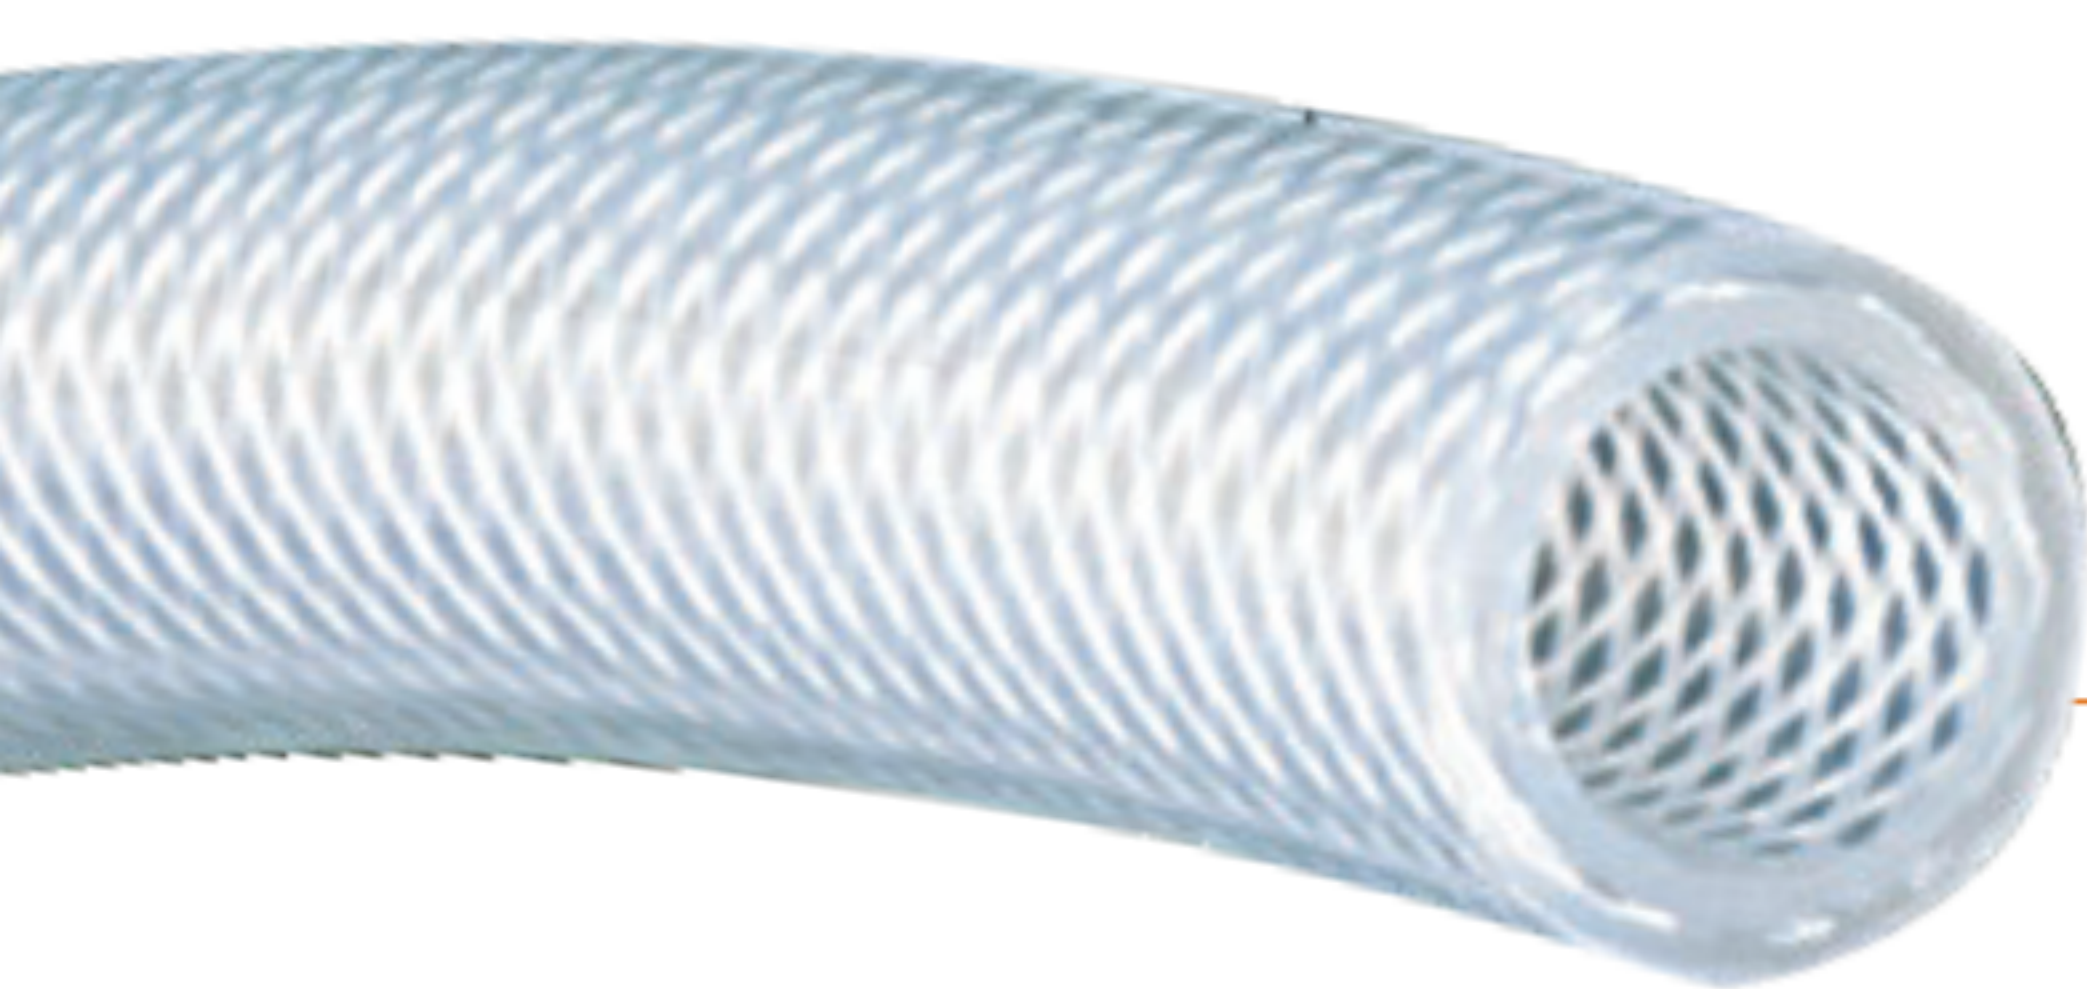

K4350 Series

EVA Yarn-Reinforced Spray Hose

GENERAL APPLICATIONS

- Agricultural spray applications, including anhydrous ammonia fertilizer
- Low pressure lawn spray
- Low pressure transfer of liquids and gases, including chemicals

CONSTRUCTION

- **Tube** – Phthalate free translucent EVA
- **Reinforcement** – High tensile strength yarn
- **Cover** – Phthalate free translucent EVA

SERVICE TEMPERATURE RANGE

-30°F (-35°C) to +150°F (+65°C)

View Up To Date Info



◀ SCAN OR VISIT
**KOA.link/
K4350**



FEATURES AND ADVANTAGES

- **Anhydrous Ammonia Transfer** – Designed for agricultural spray applications including anhydrous ammonia fertilizer.
- **Braided Fabric Reinforcement** – High tensile strength, food grade, polyester yarn braid provides higher working pressures.
- **Cold Flex Materials** – Remains flexible and easy to handle in sub-zero temperatures.

Series Number	Size Code	ID		OD		Max. Working Pressure [†] (psi)		Standard Length (ft)		Weight per Pkg. (lbs)	
		(in)	(mm)	(in)	(mm)	at 70°F (20°C)	at 122°F (50°C)	Coil	Reel	Coil	Reel
K4350	06	3/8	9.5	0.594	15.1	300	100	300	500	22	41
K4350	08	1/2	12.7	0.719	18.3	250	75	300	500	26	51
K4350	12	3/4	19.1	0.970	24.6	150	40	300	–	36	–
K4350	16	1	25.4	1.313	33.4	150	30	200	–	47	–

NOTES:

† Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

COMPLIANCES (for details see page 91)
Phthalate Free (13), **RoHS** (14)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.