


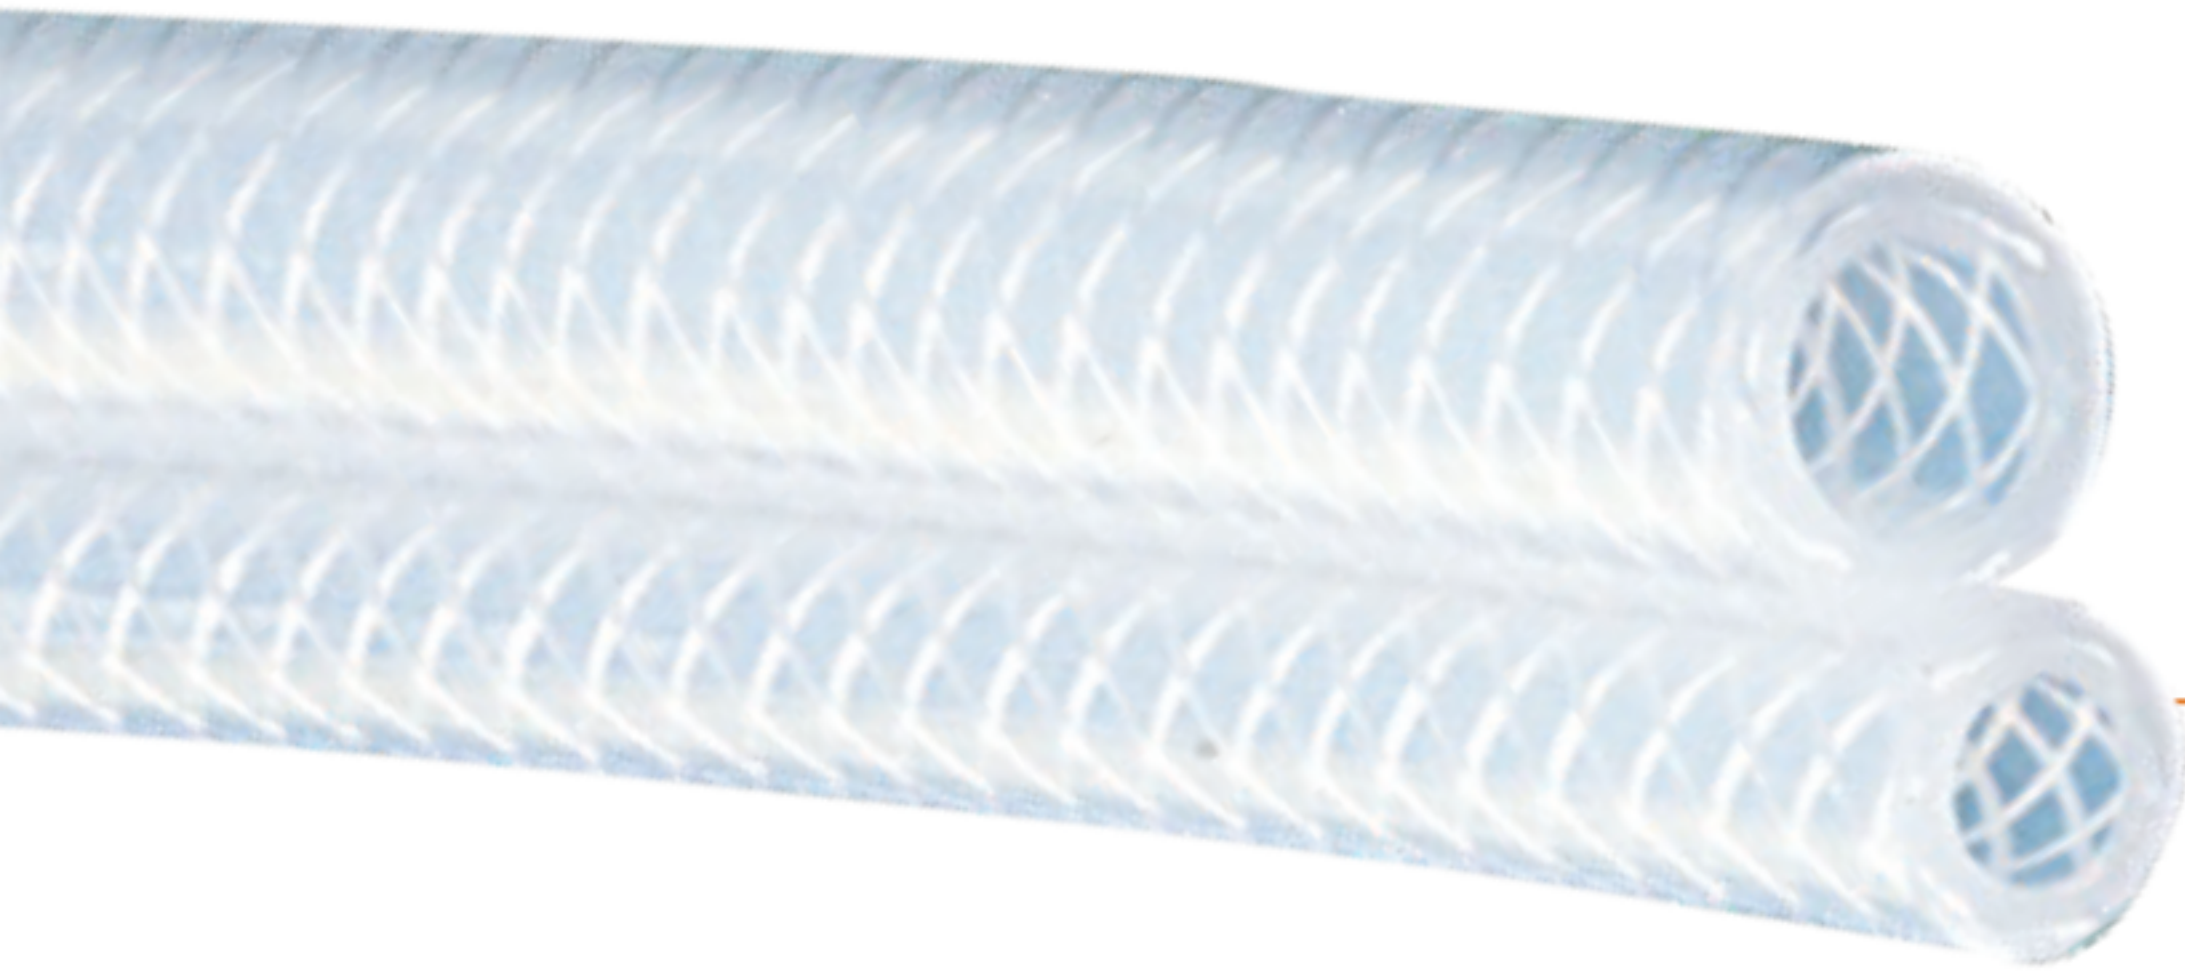

A9350 Series

Polyethylene Yarn-Reinforced Dual Line Spray Hose

GENERAL APPLICATIONS

- Automatic dilution of liquid concentrate at the spray head
- Spot herbicide treatment, while fertilizing

CONSTRUCTION

- **Tube** – Phthalate free special translucent LLDPE
- **Reinforcement** – High tensile strength yarn
- **Cover** – Phthalate free special “low friction” translucent copolymer

SERVICE TEMPERATURE RANGE

-30°F (-35°C) to +150°F (+65°C)

View Up To Date Info



◀ SCAN OR VISIT

**KOA.link/
A9350**



MADE IN NORTH AMERICA

FEATURES AND ADVANTAGES

- **Chemical Resistance** – Both core and cover offer excellent chemical and environmental stress crack resistance. (See Chemical Resistance Guide.)
- **Translucent**- Allows for visual confirmation of material flow.
- **Low Drag Resistance** – Reduces friction with ground allowing for the hose to be dragged with greater ease.
- **Extremely Lightweight** – Lighter weight reduces worker fatigue.

Part Number	Line 1				Line 2				Max. Working Pressure† (psi)		Standard Length (ft)	Weight per Pkg. (lbs)
	ID	OD			ID	OD			at 70°F (20°C)	at 122°F (50°C)		
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)				
A9350-04060-03S	1/4	6.5	0.457	11.6	3/8	9.5	0.593	15.1	250	100	300	37
A9350-04060-04S	1/4	6.5	0.457	11.6	3/8	9.5	0.593	15.1	250	100	400	49
A9350-04080-03S	1/4	6.5	0.457	11.6	1/2	12.7	0.740	18.8	250	100	300	46
A9350-04080-04S	1/4	6.5	0.457	11.6	1/2	12.7	0.740	18.8	250	100	400	61

NOTES:

Individual components of Series A9350 Dual Line Spray Hose are available on special order as Series A1710S.

† Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

COMPLIANCES (for details see page 91)

Phthalate Free {13}, **RoHS** {14}

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.