




TUNDRA HOSE™
K1231 Series / K1234 Series /
K1236 Series
Ultra-Flexible Low Temperature PVC Air & Water Hose

View Up To Date Info

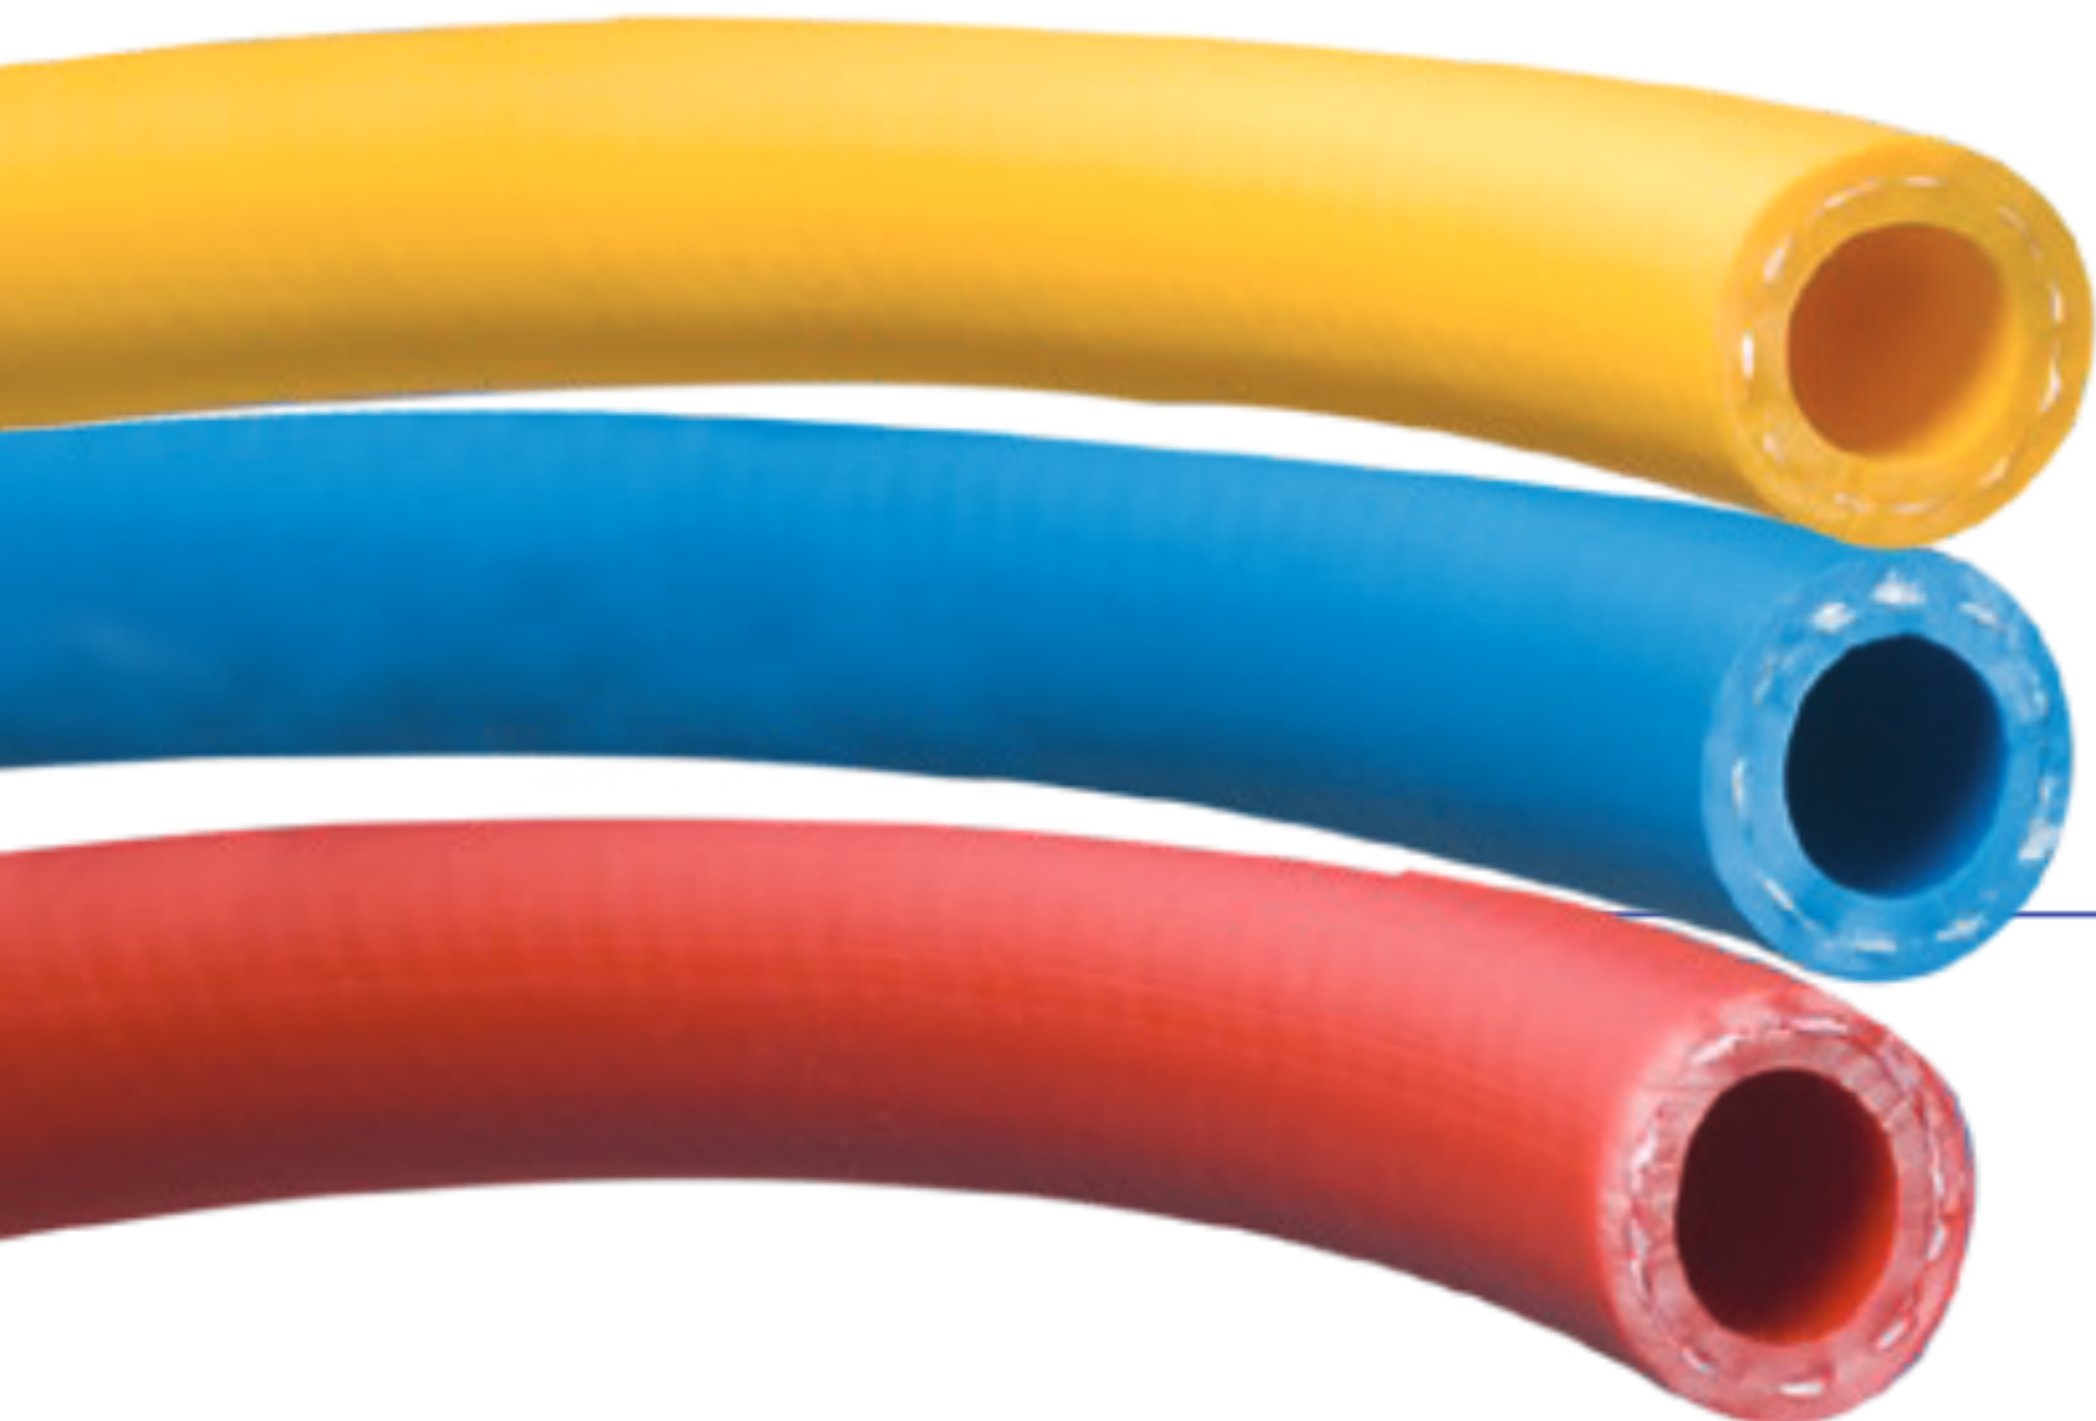

SCAN OR VISIT
[KOA.link/
K1231-4-6](https://KOA.link/K1231-4-6)



GENERAL APPLICATIONS

- A versatile, lightweight multi-function hose for air, water, or mild chemical use
- Ideal for in-plant applications that require very easy handling in tight workspaces
- In-plant freezer applications requiring air or water service
- Outdoor air and water hose for use in cold weather, where flexibility is required

CONSTRUCTION

- Tube – Phthalate free high grade low temperature PVC
- Reinforcement – High tensile strength polyester yarn
- Cover – Phthalate free high grade low temperature PVC. Available in three colors: K1231 (Yellow), K1234 (Red), K1236 (Blue)

SERVICE TEMPERATURE RANGE

-65°F (-54°C) to +150°F (+65°C)



FEATURES AND ADVANTAGES

- **Extreme Cold Flex Materials** – Remains flexible and easy to handle in sub-zero temperatures to -65°F (-54°C).
- **Abrasion Resistant PVC** – Durable PVC hold up better than rubber air hoses when dragged.
- **Medium Oil Resistance** – Meets ARPM Class B rating for medium oil resistance. Remains flexible when exposed to oils. Won't dry out or crack like other PVC hoses.
- **Lightweight** – Lighter weight reduces worker fatigue.
- **Perforated, Non-Marking Cover** – Can be dragged over flooring without leaving marks typical of rubber hoses.

Series Number			Size Code	ID		OD		Max. Working Pressure† (psi)		Standard Length (ft)		Weight per Pkg. (lbs)	
K1231 Yellow	K1234 Red	K1236 Blue		(in)	(mm)	(in)	(mm)	at 70°F (20°C)	at 122°F (50°C)	Reel	Coil	500 (ft)	100 (ft)
✓	✓	✓	04	1/4	6.5	0.500	12.7	300	160	500	100	38	8
✓	✓	✓	06	3/8	9.5	0.625	15.9	300	160	500	100	52	10
✓	✓	✓	08	1/2	12.7	0.781	19.8	300	160	500	100	77	15

NOTES:

† Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

COMPLIANCES (for details see page 91)
Phthalate Free (13), RoHS (14)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.