


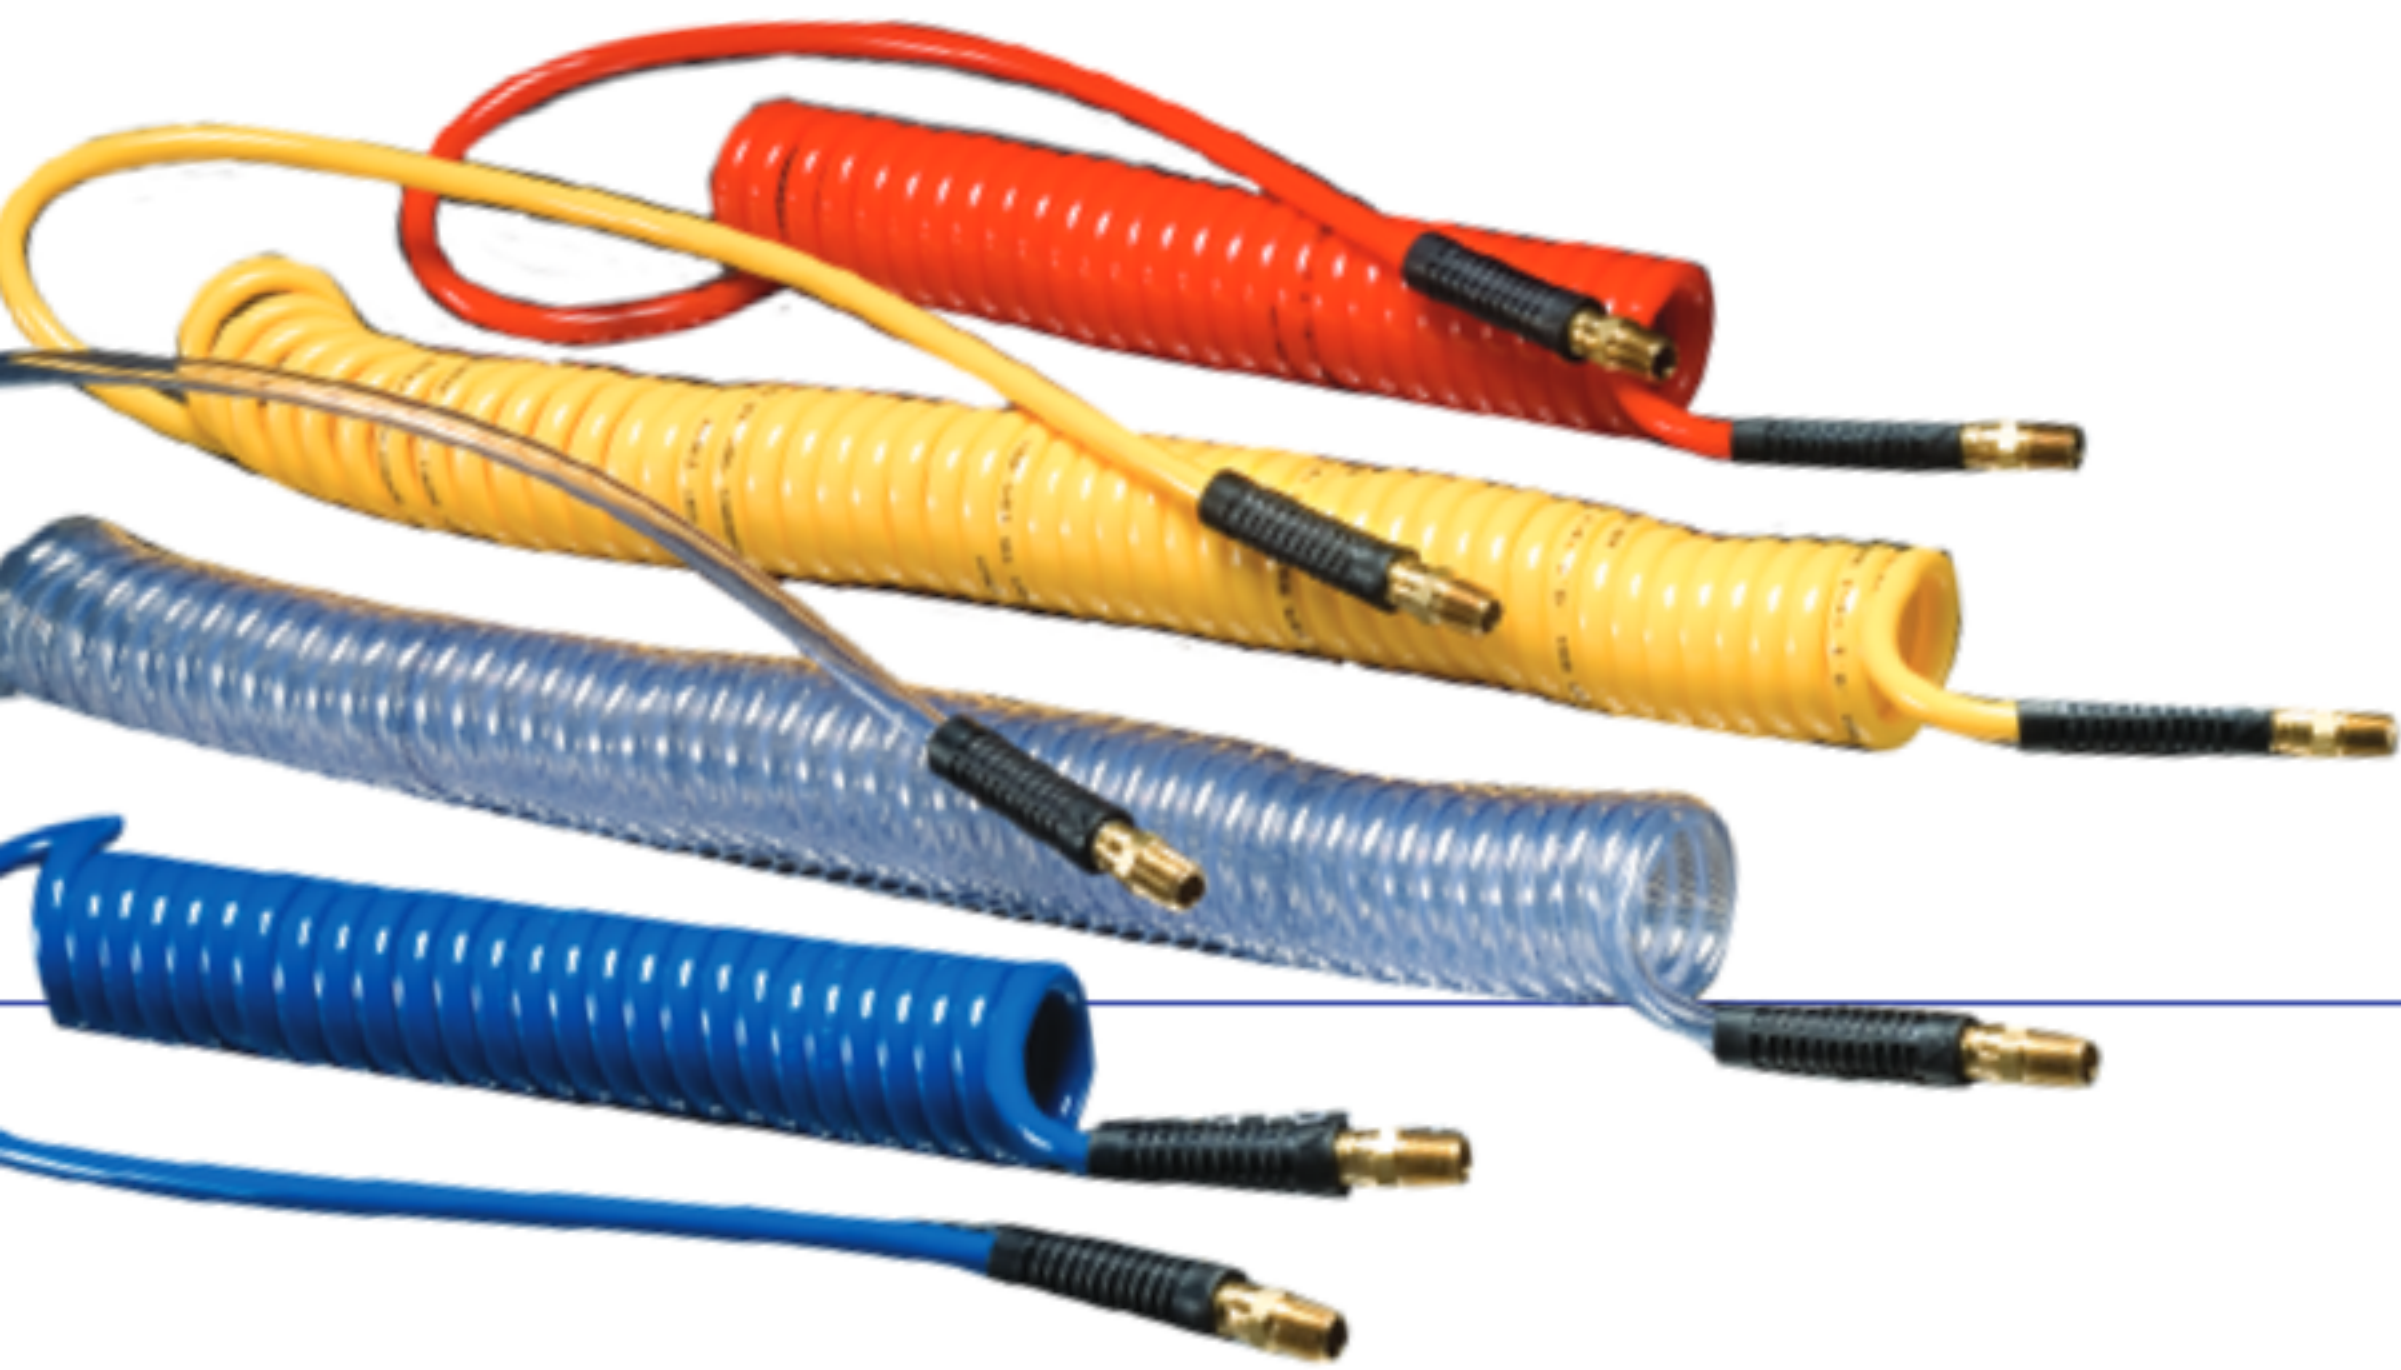

HSC2840 Series / HSC2841 Series / HSC2844 Series / HSC2846 Series

Polyurethane Self-Store Coiled Tubing Assemblies

FEATURES AND ADVANTAGES

- **High Oil Resistance** – Meets ARPM Class A rating for high oil resistance. Remains flexible when exposed to oils. Won't dry out or crack like other PVC tubing.
- **Highly Abrasion Resistant** – Designed for applications where severe abrasion is a factor. Provides for longer tubing life and lower operating costs versus rubber or PVC tubing.
- **Cold Flex Materials** – Remains flexible and easy to handle in sub-zero temperatures.
- **Lightweight** – Lighter weight to reduce worker fatigue.

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +175°F (+80°C)

Note: Each length of assembled tubing includes a 4" pigtail and a 20" whip end, assembled to 1/4" or optional 3/8" (priced upon request) male NPT permanent crimped swivel brass fittings with rubber bend restrictors. Working length is 80% of nominal length shown. 5/16" & 1/2" ID size tubing is priced upon request. Check for availability.

View Up To Date Info



◀ SCAN OR VISIT
KOA.link/HSC2840-1-4-6



MADE IN NORTH AMERICA

Series Number				Size Code X Length	ID		OD		Max. Working Pressure [†] (psi)		Working Length (ft)	Coil OD (in)	Std. Pkg.	Weight per Pkg. (lbs)
HSC2840 Blue Tint	HSC2841 Black	HSC2844 Red	HSC2846 Blue		(in)	(mm)	(in)	(mm)	at 70°F (20°C)	at 122°F (50°C)				
✓	✓	✓	✓	04 x 10	1/4	6.5	0.375	9.5	125	75	8	2	10	5.0
✓	✓	✓	✓	04 x 15	1/4	6.5	0.375	9.5	125	75	12	2	10	6.5
✓	✓	✓	✓	04 x 20	1/4	6.5	0.375	9.5	125	75	16	2	10	8.5
✓	✓	✓	✓	04 x 25	1/4	6.5	0.375	9.5	125	75	20	2	10	10.0
✓	✓	✓	✓	04 x 30	1/4	6.5	0.375	9.5	125	75	24	2	10	12.0
✓	✓	✓	✓	04 x 50	1/4	6.5	0.375	9.5	125	75	40	2	1	2.0
✓	✓	✓	✓	06 x 10	3/8	9.5	0.570	14.5	125	75	8	3	5	5.0
✓	✓	✓	✓	06 x 15	3/8	9.5	0.570	14.5	125	75	12	3	5	7.0
✓	✓	✓	✓	06 x 20	3/8	9.5	0.570	14.5	125	75	16	3	5	9.0
✓	✓	✓	✓	06 x 25	3/8	9.5	0.570	14.5	125	75	20	3	5	11.0
✓	✓	✓	✓	06 x 30	3/8	9.5	0.570	14.5	125	75	24	3	5	12.0
✓	✓	✓	✓	06 x 50	3/8	9.5	0.570	14.5	125	75	40	3	1	4.0

- NOTES:
- Tubing assemblies are furnished with the following brass fittings: 1/4" ID - 1/4" x 1/4" M NPT, 3/8" ID - 3/8" x 1/4" M NPT.
 - Refer to page 17–18 for Technical Information.
 - Not recommended for transfer of brake fluids.

COMPLIANCES (for details see page 91)

Phthalate Free (13)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.