

KC2-J67 Series

**NOW WITH
RUBBER CAGE
DIES**



DESCRIPTION


An extremely powerful, vertical unit, with a robust 190 tons of crimping force. Crimps up to 1 1/2" two wire, and up to 1 1/4" 4,000 PSI and 1" 5,000 PSI, hydraulic hoses. Uses color coded rubber cage dies for easier handling and identification.

View Up To Date Info



◀ SCAN OR VISIT
**KOA.link/
KC2-J67**

OPTIONAL ACCESSORIES (PGS. 41 – 48)

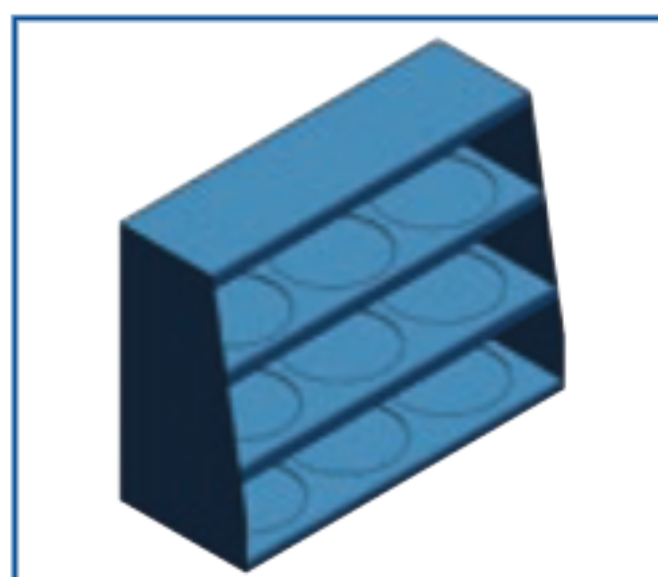

Die Rack
DIERACK-J67



Custom Made Dies



Alternate Die Type
Pusher Plate
PUSHPLATE-J67T
(Inquire for details)



Die Rack
DIEBASE-J67



Quick Change
Die Tool
KCQCT-J67

Hose Capacity (in)		Crimping Force (ton)
1 – 2 Wire	1 1/2	190
4 SP / 6 SP	1 1/4 / NA	
90° Fittings	1 1/2	
Industrial	NA	

Opening Diameter	
Max. With Dies (mm / in)	67 / 2.64
By Die Size (mm / in)	NA

Crimper Size	
L x W x H (in)	20.2 x 19.3 x 20.5
Weight (lbs)	195

Part Number	Motor Info
KC2-J67-110/1	1.5 HP (110 V) 1 PH

Hydraulic Fluid	
Type	ISO 32
Amount	5.5L = 1.45 Gal.

CONTROL MECHANISM



Digital dial micrometer & electromechanical power control. Easily switches between English and metric values.

Die Series		Die Range (mm)		
J67		10 – 54		
Die Number	Crimp Range (mm)	Closed Diameter (mm)	Length (mm)	Weight (lbs/ea)
KCDJ67-6	6.0 - 8.0	6	75	14.5
KCDJ67-8	8.0 - 10.0	8	75	14.5
KCDJ67-10	10.0 - 12.0	10	75	14.5
KCDJ67-12	12.0 - 14.0	12	75	14.5
KCDJ67-14	14.0 - 16.0	14	75	14.5
KCDJ67-16	16.0 - 19.0	16	75	14.5
KCDJ67-19	19.0 - 22.0	19	75	14.5
KCDJ67-22	22.0 - 25.0	22	75	14.5
KCDJ67-25	25.0 - 29.0	25	75	14.5
KCDJ67-29	29.0 - 34.0	29	75	14.5
KCDJ67-31	31.0 - 34.0	31	75	14.5
KCDJ67-34	34.0 - 38.0	34	75	14.5
KCDJ67-38	38.0 - 42.0	38	75	14.5
KCDJ67-40	40.0 - 44.0	40	75	14.5
KCDJ67-42	42.0 - 46.0	42	75	14.5
KCDJ67-46	46.0 - 50.0	46	75	14.5
KCDJ67-50	50.0 - 54.0	50	75	14.5
KCDJ67-54	54.0 - 58.0	54	75	14.5

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.