




# GENERAL PURPOSE RUBBER HOSE

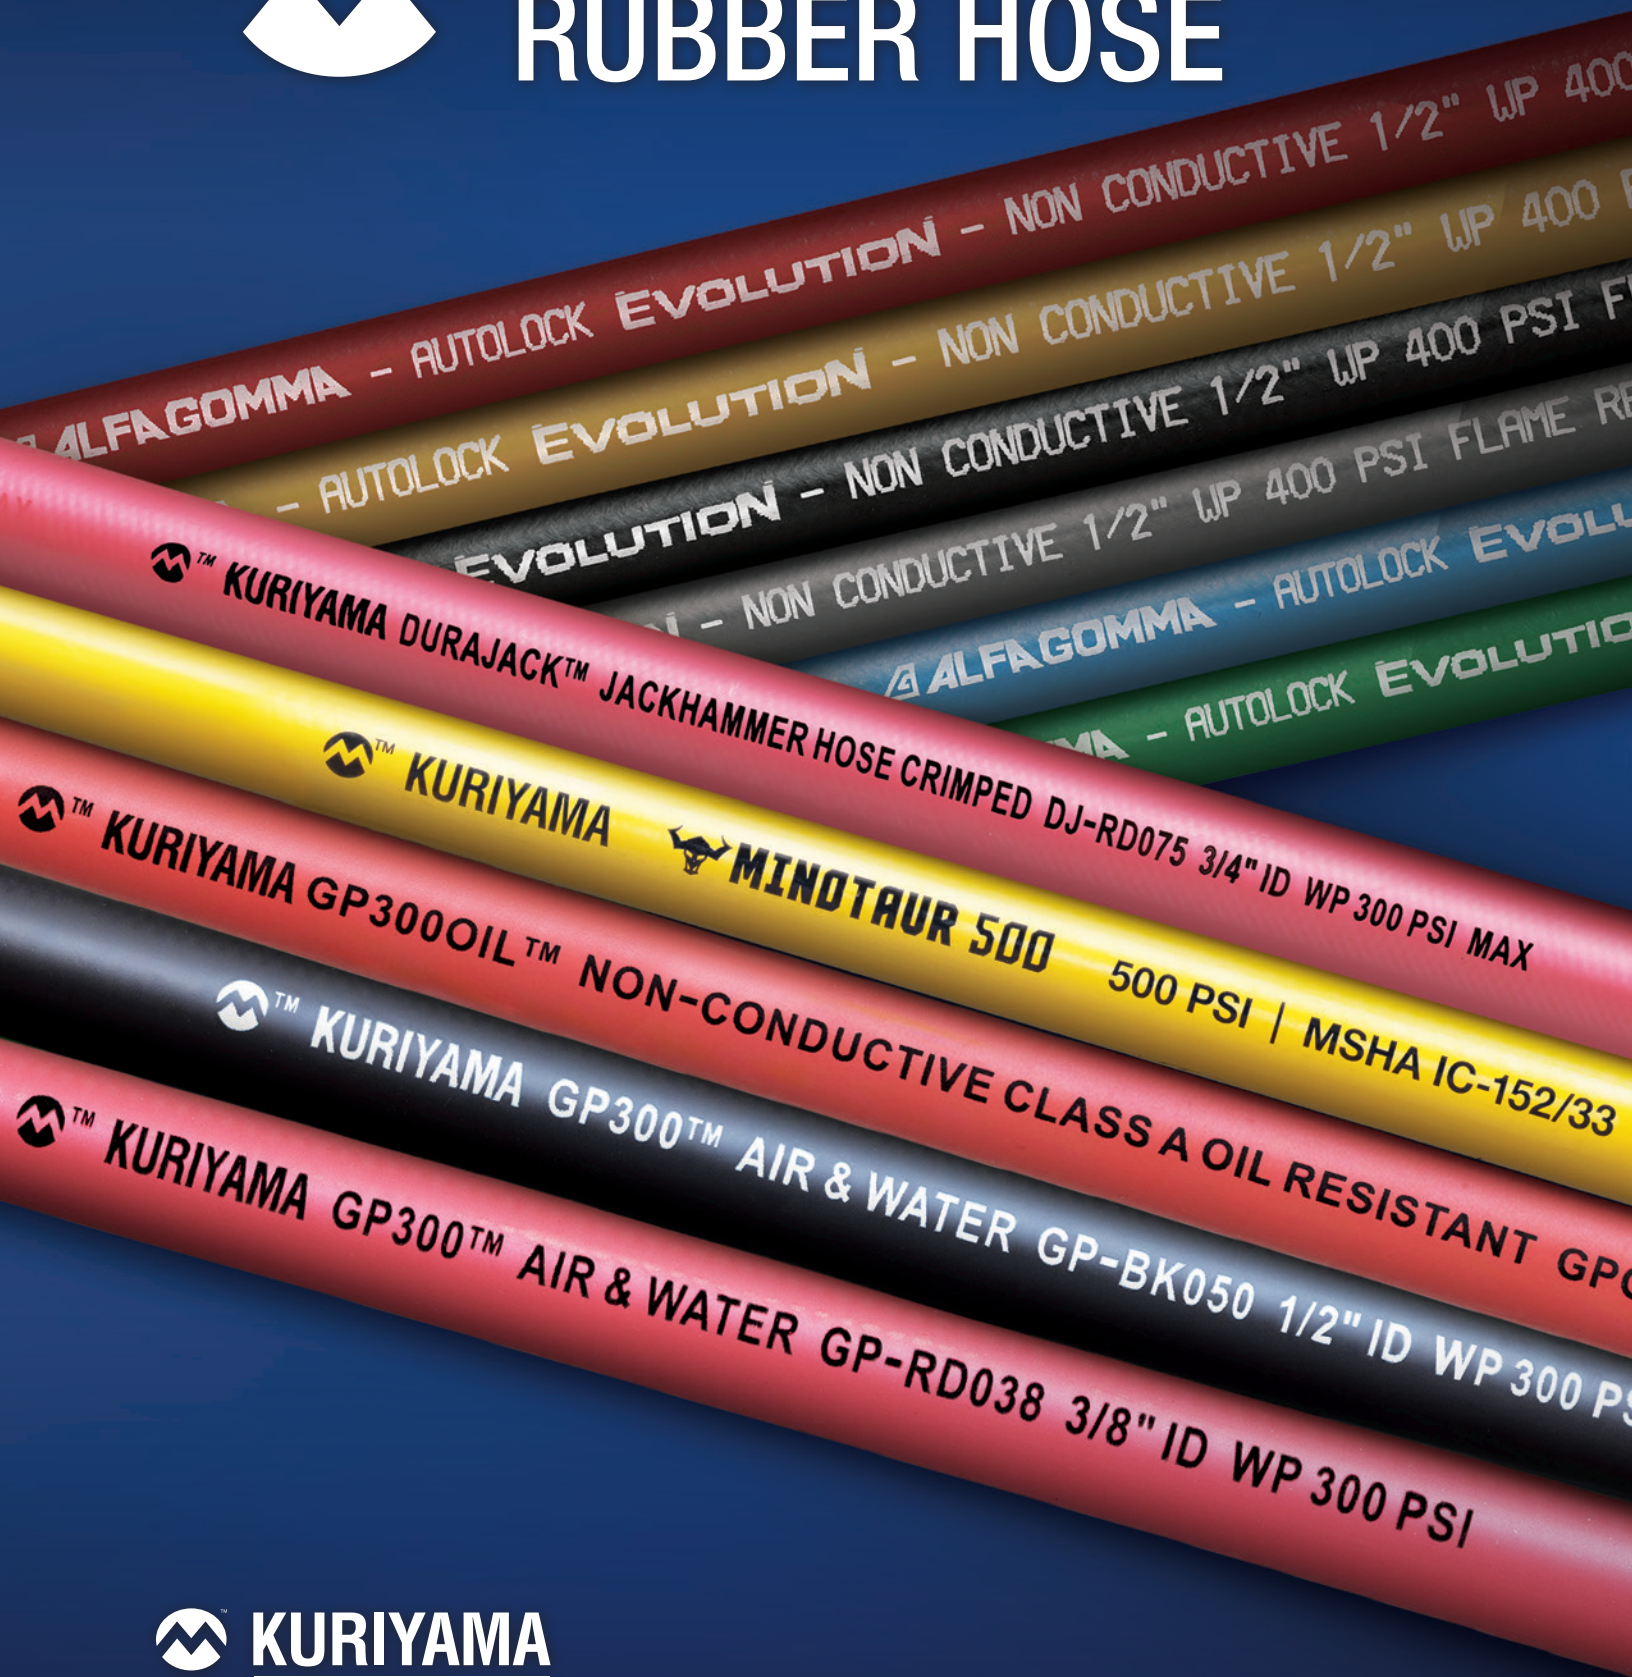

**KURIYAMA**  
OF AMERICA, INC.

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.

2

| <b>TYPE</b> | <b>DESCRIPTION</b>                                          | <b>PAGE</b> |
|-------------|-------------------------------------------------------------|-------------|
| Autolock™   | Braided Push-On Hose.....                                   | 12–13       |
|             | Cautionary Statement & Limited Warranty.....                | 28          |
| DURAJACK™   | 300 PSI Jackhammer Hose Assemblies.....                     | 10          |
| GP300™      | EPDM Rubber General Purpose Air & Water Hose.....           | 4           |
| GP300 OIL™  | Non-Conductive High Oil-Resistant General Service Hose..... | 6           |
| MINATR™     | MINOTAUR 500 PSI Air and Multipurpose Hose.....             | 11          |
| Redi-Fill™  | Farm Tank Bulk Hose & Coupled Assemblies.....               | 9           |
| Redi-GP™    | EPDM Rubber General Purpose Air & Water Hose.....           | 5           |
| Redi-Max™   | Non-Conductive High Oil-Resistant General Service Hose..... | 7           |
| Redi-Wash™  | 150 PSI Contractor's Water Hose Assemblies.....             | 8           |
|             | Push-On Fittings.....                                       | 14–19       |
|             | Quick Disconnect Couplings.....                             | 20–21       |
|             | Garden Hose Fittings.....                                   | 22–23       |
|             | Universal Air Hose Couplings & Accessories.....             | 24–27       |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



View Up To Date Info



◀ SCAN OR VISIT  
**KOA.link/  
GP**

# GP300™

## GP Series

### EPDM Rubber General Purpose Air & Water Hose

#### GENERAL APPLICATIONS

- Air and water service in industrial, construction, and agricultural applications
- Air compressors
- Pneumatic tools
- Spray equipment
- Low-pressure transfer of non-corrosive liquids

#### CONSTRUCTION

Tube – Black EPDM

Reinforcement – Braided polyester yarn

Cover – Black or Red EPDM

#### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +212°F (+100°C)

#### BRANDING

KURIYAMA GP300™ AIR & WATER GP-BK ID WP 300 PSI

#### FEATURES AND ADVANTAGES

- **Durable Construction** – Long-lasting, resistant to wear, ozone, and hydrocarbons.
- **Uniform 300 PSI** – All sizes rated to 300 PSI for safety.
- **Braided-Construction Quality** – Stable under pressure with minimal expansion and twisting.

#### PACKAGING

- Maximum 2 pcs. on reel
- 1/4" – 1 1/2" ID hoses supplied on plastic reels
- 2" ID hoses supplied on wooden reels

#### SAFETY FACTOR

3:1

| Part Number  | Color | ID<br>(in) | ID<br>(mm) | OD<br>(in) | OD<br>(mm) | Max. Working<br>Pressure (psi) | Total Reel<br>Length (ft) | Packaging<br>(lengths per reel) | Weight<br>(lbs/ft) |
|--------------|-------|------------|------------|------------|------------|--------------------------------|---------------------------|---------------------------------|--------------------|
| GP-BK025X500 | Black | 1/4        | 6          | 33/64      | 13.0       | 300                            | 500                       | 1 x 500'                        | 0.101              |
| GP-BK031X500 | Black | 5/16       | 8          | 19/32      | 15.0       | 300                            | 500                       | 1 x 500'                        | 0.128              |
| GP-BK038X500 | Black | 3/8        | 10         | 22/32      | 17.5       | 300                            | 500                       | 1 x 500'                        | 0.170              |
| GP-BK050X600 | Black | 1/2        | 13         | 53/64      | 21.3       | 300                            | 600                       | 2 x 300'                        | 0.229              |
| GP-BK062X600 | Black | 5/8        | 16         | 15/16      | 24.0       | 300                            | 600                       | 2 x 300'                        | 0.254              |
| GP-BK075X600 | Black | 3/4        | 19         | 1 5/32     | 29.5       | 300                            | 600                       | 2 x 300'                        | 0.397              |
| GP-BK100X600 | Black | 1          | 25         | 1 13/32    | 36.0       | 300                            | 600                       | 2 x 300'                        | 0.512              |
| GP-BK125X200 | Black | 1 1/4      | 32         | 1 25/32    | 45.2       | 300                            | 200                       | 2 x 100'                        | 0.811              |
| GP-BK150X200 | Black | 1 1/2      | 38         | 2 1/8      | 54.0       | 300                            | 200                       | 2 x 100'                        | 1.151              |
| GP-BK200X200 | Black | 2          | 51         | 2 19/32    | 66.0       | 300                            | 200                       | 2 x 100'                        | 1.396              |
| GP-RD025X500 | Red   | 1/4        | 6          | 33/64      | 13.0       | 300                            | 500                       | 1 x 500'                        | 0.101              |
| GP-RD031X500 | Red   | 5/16       | 8          | 19/32      | 15.0       | 300                            | 500                       | 1 x 500'                        | 0.128              |
| GP-RD038X500 | Red   | 3/8        | 10         | 22/32      | 17.5       | 300                            | 500                       | 1 x 500'                        | 0.168              |
| GP-RD050X600 | Red   | 1/2        | 13         | 53/64      | 21.3       | 300                            | 600                       | 2 x 300'                        | 0.227              |
| GP-RD062X600 | Red   | 5/8        | 16         | 15/16      | 24.0       | 300                            | 600                       | 2 x 300'                        | 0.251              |
| GP-RD075X600 | Red   | 3/4        | 19         | 1 5/32     | 29.5       | 300                            | 600                       | 2 x 300'                        | 0.395              |
| GP-RD100X600 | Red   | 1          | 25         | 1 13/32    | 36.0       | 300                            | 600                       | 2 x 300'                        | 0.507              |
| GP-RD125X200 | Red   | 1 1/4      | 32         | 1 25/32    | 45.2       | 300                            | 200                       | 2 x 100'                        | 0.803              |
| GP-RD150X200 | Red   | 1 1/2      | 38         | 2 1/8      | 54.0       | 300                            | 200                       | 2 x 100'                        | 1.140              |
| GP-RD200X200 | Red   | 2          | 51         | 2 19/32    | 66.0       | 300                            | 200                       | 2 x 100'                        | 1.382              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## Redi-GP™ BEGP Series / REGP Series

EPDM Rubber General Purpose Air & Water Hose

### GENERAL APPLICATIONS

- Agricultural
- Construction
- Industrial
- Water service lines

### CONSTRUCTION

**Tube** – Black EPDM, limited oil resistance

**Reinforcement** – Spiral polyester yarn

**Cover** – Black or red abrasion and ozone-resistant EPDM, limited oil resistance

### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +212°F (+100°C)

### BRANDING

GP AIR & WATER – SIZE – WP – MADE IN USA

### FEATURES AND ADVANTAGES

- Long lengths on reels.

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
BEGP-REGP](https://koya.link/BEGP-REGP)

### PACKAGING

- Maximum 2 pcs. on reel.
- 1/4" – 5/8" ID hoses supplied on plastic reels.
- 3/4" – 2" ID hoses supplied on wooden reels.

### SAFETY FACTOR

4:1

| Part Number  |  | Color | ID (in) | OD (in) | Working Pressure (psi) | Reel Length (ft) | Weight (lbs/pc) |
|--------------|--|-------|---------|---------|------------------------|------------------|-----------------|
| BEGP-025X700 |  | Black | 1/4     | 0.50    | 300                    | 700              | 84              |
| BEGP-031X700 |  | Black | 5/16    | 0.59    | 300                    | 700              | 77              |
| BEGP-038X700 |  | Black | 3/8     | 0.69    | 300                    | 700              | 112             |
| BEGP-050X700 |  | Black | 1/2     | 0.84    | 300                    | 700              | 168             |
| BEGP-062X700 |  | Black | 5/8     | 0.94    | 300                    | 700              | 203             |
| BEGP-075X700 |  | Black | 3/4     | 1.16    | 300                    | 700              | 252             |
| BEGP-100X700 |  | Black | 1       | 1.38    | 300                    | 700              | 343             |
| BEGP-125X300 |  | Black | 1 1/4   | 1.78    | 200                    | 300              | 237             |
| BEGP-150X300 |  | Black | 1 1/2   | 2.00    | 200                    | 300              | 270             |
| REGP-025X700 |  | Red   | 1/4     | 0.50    | 300                    | 700              | 84              |
| REGP-031X700 |  | Red   | 5/16    | 0.59    | 300                    | 700              | 84              |
| REGP-038X700 |  | Red   | 3/8     | 0.69    | 300                    | 700              | 119             |
| REGP-050X700 |  | Red   | 1/2     | 0.84    | 300                    | 700              | 175             |
| REGP-062X700 |  | Red   | 5/8     | 0.94    | 300                    | 700              | 210             |
| REGP-075X700 |  | Red   | 3/4     | 1.16    | 300                    | 700              | 266             |
| REGP-100X700 |  | Red   | 1       | 1.38    | 300                    | 700              | 357             |
| REGP-125X300 |  | Red   | 1 1/4   | 1.78    | 200                    | 300              | 243             |
| REGP-150X300 |  | Red   | 1 1/2   | 2.00    | 200                    | 300              | 285             |
| REGP-200X250 |  | Red   | 2       | 2.50    | 200                    | 250              | 339             |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# GP300 OIL™

## GPO Series

Non-Conductive High Oil-Resistant General Service Hose

View Up To Date Info



◀ SCAN OR VISIT

**KOA.link/  
GPO**

### PACKAGING

- Maximum 1 pc on reel
- 1/4" – 1-1/2" ID hoses supplied on plastic reels
- 2" ID hoses supplied on wooden reels

### SAFETY FACTOR

3:1

### GENERAL APPLICATIONS

- Air and water service where contact with oil or oily mists is frequent
- Use in manufacturing plants, maintenance shops, and industrial facilities requiring high oil resistance and electrical non-conductivity
- Air compressors
- Pneumatic tools
- Equipment in environments exposed to lubricants or petroleum-based fluids
- Fuel transfer applications involving unleaded gasoline and diesel fuel

### CONSTRUCTION

**Tube** – Black NBR, ARPM Class A High Oil Resistant

**Reinforcement** – Braided polyester yarn

**Cover** – Red NBR/PVC, ARPM Class A High Oil Resistant

### SERVICE TEMPERATURE RANGE

- 20°F (-29°C) to +180°F (+82°C)

### BRANDING

KURIYAMA GP300OIL™ NON-CONDUCTIVE CLASS A OIL RESISTANT  
GPO-RD ID SIZE WP 300 PSI

### FEATURES AND ADVANTAGES

- **Oil Resistant Tube** – ARPM Class A (High Oil Resistance), suitable for use with unleaded gasoline and diesel fuel.
- **Non-conductive Tube and Cover** – Helps protect user from shock when used near high-voltage sources.
- **Braided-Construction Quality** – Stable under pressure with minimal expansion and twisting.
- ⚠ **Application Limitation** – Intended for single-media fuel transfer only. Fuel aromatic content should not exceed 50%.

| Part Number   | Color | ID<br>(in) | ID<br>(mm) | OD<br>(in) | OD<br>(mm) | Max. Working<br>Pressure (psi) | Total Reel<br>Length (ft) | Packaging<br>(lengths per reel) | Weight<br>(lbs/ft) |
|---------------|-------|------------|------------|------------|------------|--------------------------------|---------------------------|---------------------------------|--------------------|
| GPO-RD025X600 | Red   | 1/4        | 6          | 33/64      | 13.0       | 300                            | 600                       | 1 x 600'                        | 0.106              |
| GPO-RD031X600 | Red   | 5/16       | 8          | 19/32      | 15.0       | 300                            | 600                       | 1 x 600'                        | 0.132              |
| GPO-RD038X600 | Red   | 3/8        | 10         | 43/64      | 17.0       | 300                            | 600                       | 1 x 600'                        | 0.161              |
| GPO-RD050X500 | Red   | 1/2        | 13         | 53/64      | 21.0       | 300                            | 500                       | 1 x 500'                        | 0.227              |
| GPO-RD062X500 | Red   | 5/8        | 16         | 1 1/32     | 26.0       | 300                            | 500                       | 1 x 500'                        | 0.344              |
| GPO-RD075X400 | Red   | 3/4        | 19         | 1 9/64     | 29.0       | 300                            | 400                       | 1 x 400'                        | 0.388              |
| GPO-RD100X400 | Red   | 1          | 25         | 1 13/32    | 36.0       | 300                            | 400                       | 1 x 400'                        | 0.529              |
| GPO-RD125X200 | Red   | 1 1/4      | 32         | 1 3/4      | 44.0       | 300                            | 200                       | 1 x 200'                        | 0.752              |
| GPO-RD150X200 | Red   | 1 1/2      | 38         | 2 1/8      | 54.0       | 300                            | 200                       | 1 x 200'                        | 1.191              |
| GPO-RD200X200 | Red   | 2          | 51         | 2 19/32    | 66.0       | 300                            | 200                       | 1 x 200'                        | 1.444              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## Redi-Max™ REDIMAX Series

Non-Conductive High Oil-Resistant General Service Hose

### GENERAL APPLICATIONS

- Diesel
- Fuel oil
- Oil
- Other petroleum products

▲ Do not use this product for curb pump fueling applications

▲ Not recommended for unleaded gasoline

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
REDIMAX](https://koi.link/REDIMAX)

### PACKAGING

Maximum 2 pcs. on reel

### SAFETY FACTOR

4:1

### CONSTRUCTION

Tube – Black NBR, ARPM Class A High Oil Resistant

Reinforcement – Spiral polyester yarn

Cover – Red NBR, ARPM Class A High Oil Resistant

### SERVICE TEMPERATURE RANGE

-20°F (-29°C) to +180°F (+82°C)

### BRANDING

REDI-MAX HIGH OIL RESIST. NON-CONDUCTIVE-SIZE-WP-MADE IN USA

### FEATURES AND ADVANTAGES

- Long lengths on reels.
- Non-Conductive - tested to exceed minimum electrical resistance greater than one (1) MEGOHM per inch of hose length at 1000 volts DC.

| Part Number     |                                                                                     | Color | ID<br>(in) | OD<br>(in) | Working Pressure<br>(psi) | Reel Length<br>(ft) | Weight<br>(lbs/pc) |
|-----------------|-------------------------------------------------------------------------------------|-------|------------|------------|---------------------------|---------------------|--------------------|
| REDIMAX-025x700 |  | Red   | 1/4        | 0.62       | 300                       | 700                 | 112                |
| REDIMAX-038x700 |  | Red   | 3/8        | 0.69       | 300                       | 700                 | 126                |
| REDIMAX-050x700 |  | Red   | 1/2        | 0.84       | 300                       | 700                 | 175                |
| REDIMAX-075x700 |  | Red   | 3/4        | 1.15       | 300                       | 700                 | 294                |
| REDIMAX-100x700 |  | Red   | 1          | 1.43       | 300                       | 700                 | 441                |
| REDIMAX-125x500 |  | Red   | 1 1/4      | 1.78       | 250                       | 500                 | 405                |
| REDIMAX-150x400 |  | Red   | 1 1/2      | 2.03       | 250                       | 400                 | 380                |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Redi-Wash™

## REDIWASH Series

Black 150 PSI Contractor's Water Hose Coupled Assemblies

### GENERAL APPLICATIONS

- Concrete clean-up
- Contractor's water hose
- Garden watering
- Washdown

### CONSTRUCTION

Tube – Black EPDM

Reinforcement – Polyester yarn

Cover – Black EPDM

### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +180°F (+82°C)

### BRANDING

REDI-WASH™ 150 PSI CONTRACTOR'S WATER HOSE MADE IN USA

### FEATURES AND ADVANTAGES

- A durable hose for industrial washdown applications.

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
REDIWASH](https://koya.link/REDIWASH)

### PACKAGING

Brass M X F coupled  
assembled lengths

### SAFETY FACTOR

3:1

| Part Number      |                                                                                     | Color | ID<br>(in) | OD<br>(in) | Max. Working Pressure<br>(psi) | Total Coiled<br>Length (ft) | Weight<br>(lbs/pc) |
|------------------|-------------------------------------------------------------------------------------|-------|------------|------------|--------------------------------|-----------------------------|--------------------|
| REDIWASH-062X50  |  | Black | 5/8        | 0.94       | 150 PSI                        | 50                          | 12.0               |
| REDIWASH-062X100 |  | Black | 5/8        | 0.94       | 150 PSI                        | 100                         | 24.0               |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## Redi-Fill™ BLKFT Series

### Farm Tank Bulk Hose & Coupled Assemblies

#### GENERAL APPLICATIONS

- Agricultural equipment fuel filler hose
- Electrical pumps; built-in static wire provides safety
- Farm or barrel-type pumps
- Fuel dispensing hose for construction and industrial equipment

**Note:** This is not a UL approved hose and should not be used in curb pump hose applications.

#### CONSTRUCTION

**Tube** – Black NBR, ARPM Class A High Oil Resistant

**Reinforcement** – 2-Spiral high tensile polyester yarn

**Cover** – Black NBR Blend, ARPM Class A High Oil Resistant

#### SERVICE TEMPERATURE RANGE

-20°F (-29°C) to +160°F (+70°C)

#### BRANDING

REDI-FILL™ FARM TANK W/STATIC WIRE- SIZE- MADE IN USA

#### FEATURES AND ADVANTAGES

- A durable quality fuel dispensing hose – oil & abrasion resistant.

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
REDIFILL](https://koya.link/REDIFILL)

#### PACKAGING

Brass M X M coupled assembled lengths and reels (2 pcs maximum)

**Note:** 3/4" assemblies packaged 10 per carton; 1" assemblies packaged 5 per carton; or sold individually.

#### SAFETY FACTOR

4:1

#### REDI-FILL™ COUPLED ASSEMBLIES

| Part Number  |  | Color | ID (in) | OD (in) | Working Pressure (psi) | Coil Length (ft) | Weight (lbs/pc) |
|--------------|--|-------|---------|---------|------------------------|------------------|-----------------|
| BLKFT-075X12 |  | Black | 3/4     | 1.13    | 60                     | 12               | 4.0             |
| BLKFT-075X15 |  | Black | 3/4     | 1.13    | 60                     | 15               | 5.4             |
| BLKFT-075X20 |  | Black | 3/4     | 1.13    | 60                     | 20               | 7.0             |
| BLKFT-100X15 |  | Black | 1       | 1.38    | 60                     | 15               | 8.0             |
| BLKFT-100X20 |  | Black | 1       | 1.38    | 60                     | 20               | 10.5            |

#### REDI-FILL™ BULK HOSE ON REELS

| Part Number   |  | Color | ID (in) | OD (in) | Working Pressure (psi) | Reel Length (ft) | Weight (lbs/pc) |
|---------------|--|-------|---------|---------|------------------------|------------------|-----------------|
| BLKFT-075X700 |  | Black | 3/4     | 1.13    | 60                     | 700              | 203             |
| BLKFT-100X700 |  | Black | 1       | 1.38    | 60                     | 700              | 315             |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## DURAJACK™

### DJ Series

#### 300 PSI Red Cover Jackhammer Hose Assemblies

##### GENERAL APPLICATIONS

- A heavy-duty air hose designed for use with pneumatic jackhammers and other air-operated tools in construction, roadwork, and demolition applications.
- Built to withstand rugged handling and severe working conditions, providing excellent flexibility, abrasion resistance, and coupling retention under high air pressure.

View Up To Date Info



◀ SCAN OR VISIT

[KOA.link/  
DJ-RD](https://koya.link/DJ-RD)

##### PACKAGING

50 ft. coil lengths individually wrapped

##### SAFETY FACTOR

3:1

##### CONSTRUCTION

Tube – Black EPDM

Reinforcement – Braided polyester yarn

Cover – Red abrasion and ozone resistant EPDM

##### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +212°F (+100°C)

##### BRANDING

KURIYAMA DURAJACK™ JACKHAMMER HOSE CRIMPED DJ-RD075 3/4" ID WP 300 PSI MAX

##### OIL RESISTANCE

Class C - limited oil mist.

##### FEATURES AND ADVANTAGES

- **Super Abrasion Resistance** – Cover and tube are made of EPDM to resist ozone, heat and cracking for demanding applications.
- **Braided-Construction Quality** – Stable under pressure with minimal expansion and twisting.

| Part Number   | Color | ID<br>(in) | ID<br>(mm) | OD<br>(in) | OD<br>(mm) | Max. Working<br>Pressure (psi) | Total Coiled<br>Length (ft) | Packaging                    | Weight      |
|---------------|-------|------------|------------|------------|------------|--------------------------------|-----------------------------|------------------------------|-------------|
| DJ-RD075x50   | Red   | 3/4        | 19         | 1 3/16     | 30         | 300                            | 50                          | Coil Wrapped<br>Individually | 21 lbs/pc   |
| DJ-RD075X50BX | Red   | 3/4        | 19         | 1 3/16     | 30         | 300                            | 50                          | 20 coils per box             | 439 lbs/box |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



**NEW**

## MINOTAUR 500 MINATR™ Series 500 PSI Air and Multipurpose Hose

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
MINATR](https://KOA.link/MINATR)

### PACKAGING

- Reels of various lengths (see chart)
- Max two or three\* pieces per reel (Min piece length 50')

### SAFETY FACTOR

4:1



◀ Crimp fitting  
solutions available  
for MINATR™  
Series hoses

### GENERAL APPLICATIONS

- Air hammer
- Heavy construction
- Mining
- Petroleum transfer
- Quarry operations
- Rock drilling
- Washdown
- Water jetting

### CONSTRUCTION

- **Tube** – Black non-conductive NBR (ARPM Class A)
- **Reinforcement** – High tensile textile braids
- **Cover** – Yellow NBR – abrasion, ozone, hydrocarbon resistant, non-conductive and MSHA-approved flame-resistant smooth cover. 1 1/4" and 1 1/2" ID wrapped finish.

### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +212°F (+100°C)\*

\*Actual service temperature range is application dependent.

### BRANDING

- Front:  **KURIYAMA**  **MINOTAUR 500** 500 PSI MSHA IC-152/33  
ELECTRICALLY NON-CONDUCTIVE
- Back: MINATR - \_\_\_\_ - [ID Size] – [Date Code]

### FEATURES AND ADVANTAGES

- **Superior Abrasion Resistance** – Specially formulated rubber cover provides greater abrasion resistance for demanding applications.
- **Flame Resistant Cover** – MSHA approved for acceptance of products to be used in underground mines (No. IC-152/33).
- **Oil Resistant Tube** – Meets APRM Class A (High Oil Resistance) Rating, for use with gasoline, diesel, bio-diesel and kerosene.
- **Non-conductive Tube and Cover^** – Helps protect user from shock when used near high-voltage sources.
- **Safety Yellow Cover** – High visibility, florescent yellow cover reduces risk of running or tripping over hose.
- **Mandrel-Built Braided Construction Quality**
  - Stable under pressure with minimal expansion and twisting
  - Better kink resistance and dimensional consistency
  - Superior pressure tolerance compared to competitors
  - Highly flexible design, works well in tight spaces

| Series Number | ID    |      | OD   |      | Working Pressure<br>(psi) | Total Reel Length<br>(approx. ft)** | Packaging                      | Weight<br>(lbs/ft) |
|---------------|-------|------|------|------|---------------------------|-------------------------------------|--------------------------------|--------------------|
|               | (in)  | (mm) | (in) | (mm) |                           |                                     |                                |                    |
| MINATR-025    | 1/4   | 6    | 0.55 | 14   | 500                       | 500-550-600                         | Max 3 pcs each reel**          | 0.12               |
| MINATR-038    | 3/8   | 10   | 0.71 | 18   | 500                       | 500-550                             | Max 3 pcs each reel**          | 0.18               |
| MINATR-050    | 1/2   | 13   | 0.87 | 22   | 500                       | 450-500                             | Max 3 pcs each reel**          | 0.24               |
| MINATR-075    | 3/4   | 19   | 1.14 | 29   | 500                       | 350-400                             | Max 2 pcs each reel**          | 0.35               |
| MINATR-100    | 1     | 25   | 1.42 | 36   | 500                       | 150-200                             | Max 2 pcs each reel**          | 0.51               |
| MINATR-125    | 1 1/4 | 32   | 1.73 | 44   | 500                       | –                                   | No reel - 200 ft wrapped coils | 0.73               |
| MINATR-150    | 1 1/2 | 38   | 1.97 | 50   | 500                       | –                                   | No reel - 200 ft wrapped coils | 0.85               |
| MINATR-200    | 2     | 51   | 2.6  | 66   | 500                       | –                                   | No reel - 200 ft wrapped coils | 0.83               |

\*\*Min length 50 ft, all lengths multiples of 50 ft

^ Meets a minimum of 1,000,000 ohms per inch resistance when tested with a 1,000-volt D.C. megger.


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



#### AVAILABLE COLORS



*Black* *Blue* *Gray*  
*BK Series* *BU Series* *GY Series*



*Green* *Red* *Yellow*  
*GR Series* *RD Series* *YL Series*

View Up To Date Info



◀ SCAN OR VISIT  
**KOA.link/  
AUTOLOCK**

CHECK OUT OUR  
PUSH-ON FITTINGS



## AUTOLOCK AL Series

### Braided Push-On Hose

#### GENERAL APPLICATIONS

- Air tools
- Pneumatic and low-pressure hydraulic systems
- Lubricating oils, diesel fuel and antifreeze solutions
- Water lines for molding and blow-forming machines
- Robotic welders
- Chemical and paper industries
- Automation and machine tools

#### CONSTRUCTION

- **Tube:** Oil-resistant synthetic rubber NBR (ARPM Class A)
- **Reinforcement:** High-strength textile braid for secure fitting retention
- **Cover:** Abrasion, ozone, and flame resistant NBR cover (MSHA-approved)

#### SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +212°F (+100°C)\*  
-40°F (-40°C) to +160°F (+70°C) for air transfer\*

\* Actual service temperature range is application dependent.

#### BRANDING

ALFAGOMMA – AUTOLOCK EVOLUTION – NON CONDUCTIVE \_\_\_\_ [ID Size] WP \_\_\_\_ PSI FLAME RESISTANT MSHA IC-152/21 – [Date Code]

#### PACKAGING

- Reels of various lengths (see chart)
- Max two or three\*\* pieces per reel (Min piece length 50')

#### SAFETY FACTOR:

4:1

#### FEATURES AND ADVANTAGES

- **Push-On Assembly:** Easy to connect, no clamps or tools required.
- **Flame Resistance:** MSHA-approved cover for safety in hazardous environments (No. IC-152/21).
- **Durable Construction:** Long-lasting, resistant to wear, ozone, and hydrocarbons.
- **Oil Resistant Tube:** Meets APRM Class A (High Oil Resistance) Rating, for use with gasoline, diesel, bio-diesel and kerosene.
- **Non-conductive Tube and Cover<sup>^</sup>:** Helps protect user from shock when used near high-voltage sources.
- **Mandrel-Built Braided Construction Quality:**
  - Stable under pressure with minimal expansion and twisting
  - Better kink resistance and dimensional consistency
  - Superior pressure tolerance compared to competitors
  - Highly flexible design, works well in tight spaces

\*\* Max three pieces for 1/4" through 1/2" ID, max two pieces for 5/8" through 1"

<sup>^</sup> Meets a minimum of 1,000,000 ohms per inch resistance when tested with a 1,000-volt D.C. megger.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# AUTOLOCK

## AL Series


### Braided Push-On Hose



| Series Number | Color  | ID (in) | ID (mm) | OD (in) | OD (mm) | Working Pressure (psi) | Approximate Reel Length (ft) | Packaging† (per reel)           | Weight lbs/ft |
|---------------|--------|---------|---------|---------|---------|------------------------|------------------------------|---------------------------------|---------------|
| AL-04BK       | Black  | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-05BK       | Black  | 5/16    | 8       | 0.55    | 14      | 400                    | 600                          |                                 | 0.1           |
| AL-06BK       | Black  | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08BK       | Black  | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          | Max 2 pieces of various lengths | 0.15          |
| AL-10BK       | Black  | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          |                                 | 0.21          |
| AL-12BK       | Black  | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |
| AL-16BK       | Black  | 1       | 25      | 1.34    | 34      | 250                    | 200                          |                                 | 0.35          |
| AL-04BU       | Blue   | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-06BU       | Blue   | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08BU       | Blue   | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          |                                 | 0.15          |
| AL-10BU       | Blue   | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          | Max 2 pieces of various lengths | 0.21          |
| AL-12BU       | Blue   | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |
| AL-16BU       | Blue   | 1       | 25      | 1.34    | 34      | 250                    | 200                          |                                 | 0.35          |
| AL-04GR       | Green  | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-06GR       | Green  | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08GR       | Green  | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          |                                 | 0.15          |
| AL-10GR       | Green  | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          | Max 2 pieces of various lengths | 0.21          |
| AL-12GR       | Green  | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |
| AL-04GY       | Gray   | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-06GY       | Gray   | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08GY       | Gray   | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          |                                 | 0.15          |
| AL-10GY       | Gray   | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          | Max 2 pieces of various lengths | 0.21          |
| AL-12GY       | Gray   | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |
| AL-04RD       | Red    | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-06RD       | Red    | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08RD       | Red    | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          |                                 | 0.15          |
| AL-10RD       | Red    | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          | Max 2 pieces of various lengths | 0.21          |
| AL-12RD       | Red    | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |
| AL-16RD       | Red    | 1       | 25      | 1.34    | 34      | 250                    | 200                          |                                 | 0.35          |
| AL-04YL       | Yellow | 1/4     | 6       | 0.51    | 13      | 400                    | 600                          | Max 3 pieces of various lengths | 0.09          |
| AL-06YL       | Yellow | 3/8     | 10      | 0.63    | 16      | 400                    | 600                          |                                 | 0.12          |
| AL-08YL       | Yellow | 1/2     | 13      | 0.75    | 19      | 400                    | 550                          |                                 | 0.15          |
| AL-10YL       | Yellow | 5/8     | 16      | 0.91    | 23      | 350                    | 350                          | Max 2 pieces of various lengths | 0.21          |
| AL-12YL       | Yellow | 3/4     | 19      | 1.06    | 27      | 300                    | 350                          |                                 | 0.25          |

† Min length 50 ft

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.




POFMP

## Push-On Fittings

### POFMP Series

Male Pipe x Push-On Barb



POFFP

### POFFP Series

Female Pipe x Push-On Barb

View Up To Date Info



◀ SCAN OR VISIT

[KOA.link/  
POFMP-  
POFFP](https://koya.link/POFMP-POFFP)

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).


#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

| Part Number | Size (in) | Fitting Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMP-0402  | 1/4       | 1/8               | NPTF        | 1/8 - 27        | 150                | 0.031             | 100             |
| POFMP-0404  | 1/4       | 1/4               | NPTF        | 1/4 - 18        | 150                | 0.044             | 100             |
| POFMP-0406  | 1/4       | 3/8               | NPTF        | 1/4 - 18        | 150                | 0.055             | 50              |
| POFMP-0604  | 3/8       | 1/4               | NPTF        | 1/4 - 18        | 150                | 0.053             | 50              |
| POFMP-0606  | 3/8       | 3/8               | NPTF        | 3/8 - 18        | 150                | 0.071             | 50              |
| POFMP-0608  | 3/8       | 1/2               | NPTF        | 1/2 - 14        | 150                | 0.119             | 25              |
| POFMP-0808  | 1/2       | 1/2               | NPTF        | 1/2 - 14        | 150                | 0.121             | 25              |
| POFMP-1008  | 5/8       | 1/2               | NPTF        | 1/2 - 14        | 150                | 0.143             | 25              |
| POFMP-1012  | 5/8       | 3/4               | NPTF        | 3/4 - 14        | 150                | 0.190             | 25              |
| POFMP-1208  | 3/4       | 1/2               | NPTF        | 1/2 - 14        | 150                | 1.960             | 25              |
| POFMP-1212  | 3/4       | 3/4               | NPTF        | 3/4 - 14        | 150                | 1.940             | 25              |

| Part Number | Size (in) | Fitting Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFFP-0402  | 1/4       | 1/8               | NPTF        | 1/8 - 27        | 150                | 0.029             | 100             |
| POFFP-0404  | 1/4       | 1/4               | NPTF        | 1/4 - 18        | 150                | 0.049             | 100             |
| POFFP-0604  | 3/8       | 1/4               | NPTF        | 1/4 - 18        | 150                | 0.055             | 50              |
| POFFP-0606  | 3/8       | 3/8               | NPTF        | 3/8 - 18        | 150                | 0.064             | 50              |
| POFFP-0806  | 1/2       | 3/8               | NPTF        | 3/8 - 18        | 150                | 0.077             | 50              |
| POFFP-0808  | 1/2       | 1/2               | NPTF        | 1/2 - 14        | 150                | 0.099             | 25              |
| POFFP-1008  | 5/8       | 1/2               | NPTF        | 1/2 - 14        | 150                | 0.119             | 25              |
| POFFP-1212  | 3/4       | 3/4               | NPTF        | 3/4 - 14        | 150                | 0.234             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

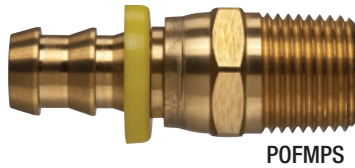


POFMPS

## Push-On Fittings

### POFMPS Series

Male Pipe Swivel x Push-On Barb



POFFPS

### POFFPS Series

Female Pipe Swivel x Push-On Barb

View Up To Date Info



◀ SCAN OR VISIT

[KOA.link/  
POFMPS-  
POFFPS](https://KOA.link/POFMPS-POFFPS)

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).


#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMPS-0404 | 1/4       | NPTF        | 1/4 - 18        | 150                | 0.062             | 50              |
| POFMPS-0606 | 3/8       | NPTF        | 3/8 - 18        | 150                | 0.090             | 25              |
| POFMPS-0808 | 1/2       | NPTF        | 1/2 - 14        | 150                | 0.143             | 25              |
| POFMPS-1212 | 3/4       | NPTF        | 3/4 - 14        | 150                | 0.249             | 25              |

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFFPS-0404 | 1/4       | NPTF        | 1/4 - 18        | 150                | 0.060             | 50              |
| POFFPS-0606 | 3/8       | NPTF        | 3/8 - 18        | 150                | 0.093             | 50              |
| POFFPS-0808 | 1/2       | NPTF        | 1/2 - 14        | 150                | 0.117             | 50              |
| POFFPS-1212 | 3/4       | NPTF        | 3/4 - 14        | 150                | 0.214             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

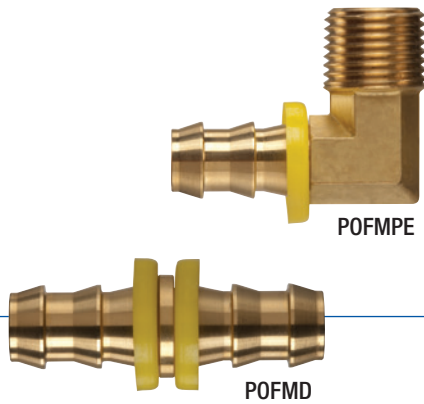

## Push-On Fittings POFMPE Series

Male Pipe 90° Elbow x Push-On Barb

## POFMD Series Hose Mender

### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).

### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

View Up To Date Info




◀ SCAN OR VISIT  
[KOA.link/  
POFMPE-  
POFMD](https://koya.link/POFMPE-POFMD)

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMPE-0404 | 1/4       | NPTF        | 1/4 - 18        | 150                | 0.062             | 50              |
| POFMPE-0606 | 3/8       | NPTF        | 3/8 - 18        | 150                | 0.088             | 25              |
| POFMPE-0808 | 1/2       | NPTF        | 1/2 - 14        | 150                | 0.165             | 25              |
| POFMPE-1212 | 3/4       | NPTF        | 3/4 - 14        | 150                | 0.293             | 25              |

| Part Number | Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|--------------------|-------------------|-----------------|
| POFMD-0404  | 1/4       | 150                | 0.026             | 100             |
| POFMD-0606  | 3/8       | 150                | 0.046             | 50              |
| POFMD-0808  | 1/2       | 150                | 0.073             | 50              |
| POFMD-1010  | 5/8       | 150                | 0.130             | 25              |
| POFMD-1212  | 3/4       | 150                | 0.159             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

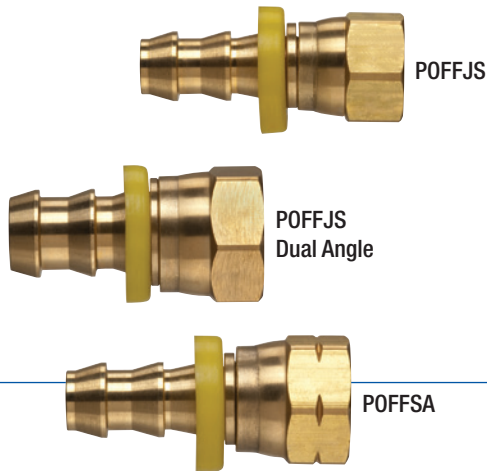
[View Up To Date Info](#)


◀ SCAN OR VISIT  
[KOA.link/  
POFFJS-  
POFFSA](https://koya.link/POFFJS-POFFSA)

## Push-On Fittings

### POFFJS Series

Female JIC 37° Flare Swivel x Push-On Barb

Female JIC 37°/SAE 45° Flare Swivel x Push-On Barb,  
Dual Angle 1/4", 1/2", 5/8"

### POFFSA Series

Female SAE 45° Flare Swivel x Push-On Barb

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
  - Push-On fittings will lock on the hose without the use of clamps or ferrules.
  - Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).


#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.


| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFFJS-0606 | 3/8       | UNF         | 9/16 - 18       | 300                | 0.064             | 50              |
| POFFJS-1212 | 3/4       | UNF         | 1 1/16 - 12     | 300                | 0.220             | 25              |
| POFFJS-0404 | 1/4       | UNF         | 7/16 - 20       | 300                | 0.040             | 100             |
| POFFJS-0808 | 1/2       | UNF         | 3/4 - 16        | 300                | 0.097             | 25              |
| POFFJS-0810 | 1/2       | UNF         | 7/8 - 14        | 300                | 0.130             | 25              |
| POFFJS-1010 | 5/8       | UNF         | 7/8 - 14        | 300                | 0.172             | 25              |

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFFSA-0606 | 3/8       | UNF         | 9/16 - 18       | 300                | 0.071             | 100             |
| POFFSA-1212 | 3/4       | UNF         | 1 1/16 - 12     | 300                | 0.262             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



POFMSA



POFMJS

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
POFMSA-  
POFMJS](https://koa.link/POFMSA-POFMJS)

## Push-On Fittings

### POFMSA Series

Male SAE 45° Flare x Push-On Barb

### POFMJS Series

Male JIC 37° Flare x Push-On Barb

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).


#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMSA-0404 | 1/4       | UNF         | 7/16 - 20       | 300                | 0.029             | 100             |
| POFMSA-0606 | 3/8       | UNF         | 9/16 - 18       | 300                | 0.071             | 50              |
| POFMSA-0808 | 1/2       | UNF         | 3/4 - 16        | 300                | 0.112             | 50              |

| Part Number | Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMJS-0404 | 1/4       | UNF         | 7/16 - 20       | 300                | 0.035             | 100             |
| POFMJS-0606 | 3/8       | UNF         | 9/16 - 18       | 300                | 0.060             | 50              |
| POFMJS-0808 | 1/2       | UNF         | 3/4 - 16        | 300                | 0.121             | 50              |
| POFMJS-1212 | 3/4       | UNF         | 1 1/16 - 12     | 300                | 0.291             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

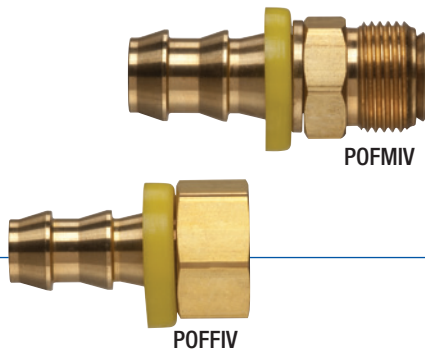

## Push-On Fittings

### POFMIV Series

Male Inverted Flare Swivel x Push-On Barb

### POFFIV Series

Female Inverted Flare Swivel x Push-On Barb

#### FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.
- ① For use with Kuriyama Autolock™ Push-On Hose (AL Series).

#### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

View Up To Date Info




◀ SCAN OR VISIT

[KOA.link/  
POFMIV-  
POFFIV](https://koya.link/POFMIV-POFFIV)

| Part Number | Hose Size (in) | Fitting Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|----------------|-------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFMIV-0404 | 1/4            | 1/4               | UNF         | 7/16 - 24       | 300                | 0.031             | 100             |
| POFMIV-0405 | 1/4            | 5/16              | UNF         | 1/2 - 20        | 300                | 0.037             | 100             |
| POFMIV-0606 | 3/8            | 3/8               | UNF         | 5/8 - 18        | 300                | 0.071             | 100             |
| POFMIV-0808 | 1/2            | 1/2               | UNF         | 3/4 - 16        | 300                | 0.106             | 50              |
| POFMIV-1010 | 5/8            | 5/8               | UNF         | 7/8 - 14        | 300                | 0.148             | 25              |

| Part Number | Hose Size (in) | Fitting Size (in) | Thread Type | Thread (in-TPI) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|----------------|-------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| POFFIV-0404 | 1/4            | 1/4               | UNF         | 7/16 - 24       | 300                | 0.024             | 100             |
| POFFIV-0405 | 1/4            | 5/16              | UNF         | 1/2 - 20        | 300                | 0.026             | 100             |
| POFFIV-0606 | 3/8            | 3/8               | UNF         | 5/8 - 18        | 300                | 0.053             | 50              |
| POFFIV-0808 | 1/2            | 1/2               | UNF         | 3/4 - 16        | 300                | 0.079             | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

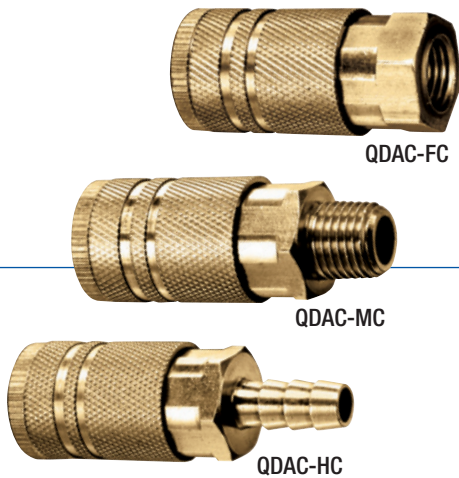

## Quick Disconnect Couplings QDAC Series

FC Coupler x Female Thread

MC Coupler x Male Thread

HC Coupler x Hose Barb

### FEATURES AND ADVANTAGES

- Quick connect design for easy connecting and disconnecting.
- Industrial interchange semi-automatic connection design.
- Couplings made of brass for high corrosion resistance and longer life.
- ① Suitable for use with GP300™, Redi-GP™, GP300 OIL™, Redi-Max™, DURAJACK™, and other compatible air and general service hoses. Working pressure is limited to the lower-rated component (hose or coupling).

### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

View Up To Date Info



◀ SCAN OR VISIT


[KOA.link/  
QDAC](https://koya.link/QDAC)

| Part Number | Body Size<br>(in) | NPT Thread Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------------|-----------------------|----------------------|--------------------|
| QDAC-4FC    | 1/4               | 1/4                     | 300                   | 0.230                | 10                 |
| QDAC-6FC    | 1/4               | 3/8                     | 300                   | 0.230                | 10                 |


| Part Number | Body Size<br>(in) | Barb Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------|-----------------------|----------------------|--------------------|
| QDAC-4HC    | 1/4               | 1/4               | 300                   | 0.230                | 10                 |
| QDAC-6HC    | 1/4               | 3/8               | 300                   | 0.230                | 10                 |

| Part Number | Body Size<br>(in) | NPT Thread Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------------|-----------------------|----------------------|--------------------|
| QDAC-4MC    | 1/4               | 1/4                     | 300                   | 0.230                | 10                 |
| QDAC-6MC    | 1/4               | 3/8                     | 300                   | 0.230                | 10                 |


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



QDAP-FP



QDAP-MP



QDAP-HP

## Quick Disconnect Couplings QDAP Series

FP Plug x Female Thread

MP Plug x Male Thread

HP Plug x Hose Barb

### FEATURES AND ADVANTAGES

- Quick connect design for easy connecting and disconnecting.
- Industrial interchange semi-automatic connection design.
- Couplings made of brass for high corrosion resistance and longer life.
- Suitable for use with GP300™, Redi-GP™, GP300 OIL™, Redi-Max™, DURAJACK™, and other compatible air and general service hoses. Working pressure is limited to the lower-rated component (hose or coupling).

### MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

[View Up To Date Info](#)



◀ SCAN OR VISIT

[KOA.link/  
QDAP](https://koi.link/QDAP)

| Part Number | Body Size<br>(in) | NPT Thread Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------------|-----------------------|----------------------|--------------------|
| QDAP-4FP    | 1/4               | 1/4                     | 300                   | 0.050                | 10                 |
| QDAP-6FP    | 1/4               | 3/8                     | 300                   | 0.050                | 10                 |

| Part Number | Body Size<br>(in) | NPT Thread Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------------|-----------------------|----------------------|--------------------|
| QDAP-4MP    | 1/4               | 1/4                     | 300                   | 0.050                | 10                 |
| QDAP-6MP    | 1/4               | 3/8                     | 300                   | 0.050                | 10                 |

| Part Number | Body Size<br>(in) | Barb Size<br>(in) | PSI Rating<br>at 70°F | Weight Each<br>(lbs) | Standard<br>Carton |
|-------------|-------------------|-------------------|-----------------------|----------------------|--------------------|
| QDAP-4HP    | 1/4               | 1/4               | 300                   | 0.050                | 10                 |
| QDAP-6HP    | 1/4               | 3/8               | 300                   | 0.050                | 10                 |


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



BRGHT



BRGHT-FEM



BRGHT-M

## BRGHT Series

Brass Garden Hose Fitting Set

## BRGHT-FEM Series

Brass Female Garden Hose Fitting

## BRGHT-M Series

Brass Male Garden Hose Fitting

### FEATURES AND ADVANTAGES

- Designed for use in connection of hoses, nozzles, hydrants, pipes, or other fittings using NST, NPSH, or GHT threads.
- Made of heavy-duty brass material.
- Brass adapters are more durable and heat resistant than aluminum adapters.
- ① Suitable for use with GP300™, Redi-GP™, and Redi-Wash™ hoses for water service applications. Working pressure is limited to the lower-rated component (hose or fitting).

### MATERIAL SPECIFICATIONS

- Brass ASTM B124, Grade 37700.

View Up To Date Info



◀ SCAN OR VISIT  
**KOA.link/  
BRGHT**

| Part Number | Thread Size (in) | Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|------------------|--------|-----------------|--------------------|-------------------|-----------------|
| BRGHT050    | 3/4              | GHT    | 1/2             | 150                | 0.25              | 180             |
| BRGHT062    | 3/4              | GHT    | 5/8             | 150                | 0.25              | 180             |
| BRGHT075    | 3/4              | GHT    | 3/4             | 150                | 0.25              | 180             |

| Part Number  | Female Thread Size (in) | Female Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|--------------|-------------------------|---------------|-----------------|--------------------|-------------------|-----------------|
| BRGHT-FEM050 | 3/4                     | GHT           | 1/2             | 150                | 0.12              | 360             |
| BRGHT-FEM062 | 3/4                     | GHT           | 5/8             | 150                | 0.12              | 360             |
| BRGHT-FEM075 | 3/4                     | GHT           | 3/4             | 150                | 0.12              | 360             |

| Part Number | Male Thread Size (in) | Male Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| BRGHT-M050  | 3/4                   | GHT         | 1/2             | 150                | 0.13              | 360             |
| BRGHT-M062  | 3/4                   | GHT         | 5/8             | 150                | 0.13              | 360             |
| BRGHT-M075  | 3/4                   | GHT         | 3/4             | 150                | 0.13              | 360             |


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



BRNPS



BRNPS-FEM



BRNPS-M

[View Up To Date Info](#)


◀ SCAN OR VISIT  
[KOA.link/  
BRNPS](https://koya.link/BRNPS)

## BRNPS Series

Brass Garden Hose Fitting Set

## BRNPS-FEM Series

Brass Female Garden Hose Fitting

## BRNPS-M Series

Brass Male Garden Hose Fitting

### FEATURES AND ADVANTAGES

- Designed for use in connection of hoses, nozzles, hydrants, pipes, or other fittings using NST, NPSH, or GHT threads.
- Made of heavy-duty brass material.
- Brass adapters are more durable and heat resistant than aluminum adapters.
- ① Suitable for use with GP300™, Redi-GP™, and Redi-Wash™ hoses for water service applications. Working pressure is limited to the lower-rated component (hose or fitting).

### MATERIAL SPECIFICATIONS


- Brass ASTM B124, Grade 37700.

| Part Number | Thread Size (in) | Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|------------------|--------|-----------------|--------------------|-------------------|-----------------|
| BRNPS100    | 1                | NPS    | 1               | 150                | 0.49              | 120             |

| Part Number  | Female Thread Size (in) | Female Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|--------------|-------------------------|---------------|-----------------|--------------------|-------------------|-----------------|
| BRNPS-FEM100 | 1                       | NPS           | 1               | 150                | 0.25              | 240             |

| Part Number | Male Thread Size (in) | Male Thread | Shank Size (in) | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------------------|-------------|-----------------|--------------------|-------------------|-----------------|
| BRNPS-M100  | 1                     | NPS         | 1               | 150                | 0.25              | 240             |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

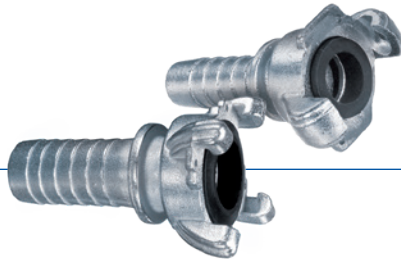

## Universal Air Hose Couplings & Accessories HE Series

### Hose Coupling

**⚠ WARNING:** Not for use  
in steam applications

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
HE](https://koya.link/HE)

#### FEATURES AND ADVANTAGES

- Applications include compressed air systems and pneumatic tools.
- Available in both two lug and four lug styles for quick connecting.
- Designed for compressed air and water service only.
- ① Suitable for use with GP300™, Redi-GP™, and DURAJACK™ hoses for compressed air service. Working pressure is limited to the lower-rated component (hose or coupling).

#### MATERIAL SPECIFICATIONS

- ASTM A27, Grade 1030 Zinc Plated Carbon Steel.
- Complies with Mil-Spec A-A-59553.

| Part Number | Hose ID Size (in) | Style | Gasket  | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-------------------|-------|---------|--------------------|-------------------|-----------------|
| HE-38       | 3/8               | 2 Lug | AHG-75  | 150                | 0.44              | 25              |
| HE-50       | 1/2               | 2 Lug | AHG-75  | 150                | 0.48              | 25              |
| HE-75       | 3/4               | 2 Lug | AHG-75  | 150                | 0.56              | 25              |
| HE-100      | 1                 | 2 Lug | AHG-75  | 150                | 0.64              | 25              |
| HE-125      | 1 1/4             | 4 Lug | AHG-100 | 150                | 1.70              | 10              |
| HE-150      | 1 1/2             | 4 Lug | AHG-100 | 150                | 1.80              | 10              |
| HE-200      | 2                 | 4 Lug | AHG-100 | 150                | 2.00              | 10              |


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## Universal Air Hose Couplings & Accessories

### FHE Series

Hose Coupling Crimp

**⚠ WARNING:** Not for use  
in steam applications



View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
FHE](https://KOA.link/FHE)

#### FEATURES AND ADVANTAGES

- Applications include compressed air systems and pneumatic tools.
- Available in both two lug and four lug styles for quick connecting.
- Designed for compressed air and water service only.
- ① Suitable for use with GP300™, Redi-GP™, and DURAJACK™ hoses for compressed air service. Working pressure is limited to the lower-rated component (hose or coupling).

#### MATERIAL SPECIFICATIONS

- ASTM A27, Grade 1030 Zinc Plated Carbon Steel.
- Complies with Mil-Spec A-A-59553.

| Part Number | Hose ID Size (in) | Hose OD (in)      | Style | Gasket | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-------------------|-------------------|-------|--------|--------------------|-------------------|-----------------|
| FHE-50      | 1/2               | 27/32 - 1 1/32    | 2 Lug | AHG-75 | 150                | 0.50              | 20              |
| FHE-75      | 3/4               | 1 1/16 - 1 11/32  | 2 Lug | AHG-75 | 150                | 0.60              | 20              |
| FHE-100     | 1                 | 1 9/32 - 1 17/32  | 2 Lug | AHG-75 | 150                | 0.66              | 20              |
| FHE-101     | 1                 | 1 15/32 - 1 23/32 | 2 Lug | AHG-75 | 150                | 0.66              | 20              |


### TWC Series

Three Way Connector

### BE Series

Blank End

**⚠ WARNING:** Not for use  
in steam applications

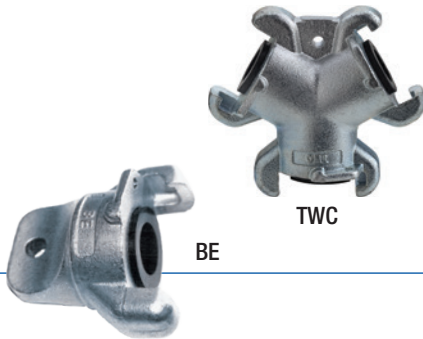

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
TWC-BE](https://KOA.link/TWC-BE)

#### FEATURES AND ADVANTAGES

- Applications include compressed air systems and pneumatic tools.
- Available in both two lug and four lug styles for quick connecting.
- Designed for compressed air and water service only.
- ① Suitable for use with GP300™, Redi-GP™, and DURAJACK™ hoses for compressed air service. Working pressure is limited to the lower-rated component (hose or coupling).

#### MATERIAL SPECIFICATIONS

- ASTM A27, Grade 1030 Zinc Plated Carbon Steel.
- Complies with Mil-Spec A-A-59553.

| Part Number | Style | Gasket | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-------|--------|--------------------|-------------------|-----------------|
|-------------|-------|--------|--------------------|-------------------|-----------------|

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## Universal Air Hose Couplings & Accessories


### FE Series

Female Threaded Coupling

### ME Series

Male Threaded Coupling

**⚠ WARNING:** Not for use  
in steam applications



FE



ME

#### FEATURES AND ADVANTAGES

- Applications include compressed air systems and pneumatic tools.
- Available in both two lug and four lug styles for quick connecting.
- Designed for compressed air and water service only.
- ① Suitable for use with GP300™, Redi-GP™, and DURAJACK™ hoses for compressed air service. Working pressure is limited to the lower-rated component (hose or coupling).

#### MATERIAL SPECIFICATIONS

- ASTM A27, Grade 1030 Zinc Plated Carbon Steel.
- Complies with Mil-Spec A-A-59553.

View Up To Date Info



◀ SCAN OR VISIT

[KOA.link/  
FE-ME](https://koya.link/FE-ME)

| Part Number | Female Thread Size (in) | Style | Gasket  | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-------------------------|-------|---------|--------------------|-------------------|-----------------|
| FE-25       | 1/4                     | 2 Lug | AHG-75  | 150                | 0.32              | 25              |
| FE-38       | 3/8                     | 2 Lug | AHG-75  | 150                | 0.33              | 25              |
| FE-50       | 1/2                     | 2 Lug | AHG-75  | 150                | 0.44              | 25              |
| FE-75       | 3/4                     | 2 Lug | AHG-75  | 150                | 0.48              | 25              |
| FE-100      | 1                       | 2 Lug | AHG-75  | 150                | 0.52              | 25              |
| FE-125      | 1 1/4                   | 4 Lug | AHG-100 | 150                | 0.90              | 10              |
| FE-150      | 1 1/2                   | 4 Lug | AHG-100 | 150                | 1.00              | 10              |
| FE-200      | 2                       | 4 Lug | AHG-100 | 150                | 1.20              | 10              |

| Part Number | Male Thread Size (in) | Style | Gasket | PSI Rating at 70°F | Weight Each (lbs) | Standard Carton |
|-------------|-----------------------|-------|--------|--------------------|-------------------|-----------------|
| ME-25       | 1/4                   | 2 Lug | AHG-75 | 150                | 0.36              | 25              |
| ME-38       | 3/8                   | 2 Lug | AHG-75 | 150                | 0.40              | 25              |
| ME-50       | 1/2                   | 2 Lug | AHG-75 | 150                | 0.44              | 25              |
| ME-75       | 3/4                   | 2 Lug | AHG-75 | 150                | 0.48              | 25              |
| ME-100      | 1                     | 2 Lug | AHG-75 | 150                | 0.60              | 25              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## Universal Air Hose Couplings & Accessories HC Series

### 2-Bolt Interlocking Hose Clamp

**⚠ WARNING:** Not for use  
in steam applications

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
HC](https://KOA.link/HC)

#### FEATURES AND ADVANTAGES

- Applications include compressed air systems and pneumatic tools.
- Available in both two lug and four lug styles for quick connecting.
- Designed for compressed air and water service only.
- ① Suitable for use with GP300™, Redi-GP™, and DURAJACK™ hoses for compressed air service. Working pressure is limited to the lower-rated component (hose or coupling).

#### MATERIAL SPECIFICATIONS

- ASTM A27, Grade 1030 Zinc Plated Carbon Steel.
- Complies with Mil-Spec A-A-59553.
- Gasket – Buna-N.

| Part Number | Size Range (in)   | Weight Each (lbs) | Maximum Torque (ft. lbs) | Standard Carton |
|-------------|-------------------|-------------------|--------------------------|-----------------|
| HC-38       | 11/16 - 3/4       | 0.20              | 6                        | 25              |
| HC-50       | 1 - 1 1/8         | 0.32              | 6                        | 25              |
| HC-75       | 1 1/8 - 1 5/16    | 0.56              | 12                       | 25              |
| HC-101      | 1 5/16 - 1 1/2    | 1.05              | 21                       | 25              |
| HC-100      | 1 17/32 - 1 21/32 | 0.72              | 21                       | 25              |



View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
USCL](https://KOA.link/USCL)

## USCL Series

### Carbon Steel Safety Clip with Lanyard

| Part Number | Weight Each (lbs) | Standard Carton |
|-------------|-------------------|-----------------|
| USCL        | 0.025             | 10              |

**NOTE:** Sold in standard carton quantity only.



View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
AHG](https://KOA.link/AHG)

## AHG Series

### Replacement Gasket for Universal Couplings

| Part Number | Size Range (in) | Weight Each (lbs) | Standard Carton |
|-------------|-----------------|-------------------|-----------------|
| AHG-75      | 1/2 - 1         | 0.01              | 10              |
| AHG-100     | 1 1/4 - 2       | 0.02              | 10              |

**Note:** Sold in standard carton quantity only.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## CAUTIONARY STATEMENT

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

## LIMITED WARRANTY

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECTED TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT.

05/03/21 REV

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

This image shows a full page of blank white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for writing or drawing. There are no margins, text, or other markings on the page.[illegible]

**KURIYAMA**  
OF AMERICA, INC.

30




**KURIYAMA**  
OF AMERICA, INC.

# THE KURIYAMA NETWORK

Kuriyama's North American Operations comprise an integrated network of manufacturing and distribution facilities strategically located across the continent. This footprint supports a wide range of industrial and hydraulic hose and couplings products, and the capability to engineer custom solutions for demanding applications.

The Kuriyama Distribution Network serves the United States through five primary distribution centers totaling more than 700,000 square feet, including a state-of-the-art 329,000 square foot Central Distribution Center in Huntley, Illinois.

Our Manufacturing Network includes seven North American manufacturing and compounding facilities, producing thermoplastic industrial hose, hydraulic hose, high pressure spray hose, metal hose assemblies, NFPA 1961 fire hose and engineered tubing.

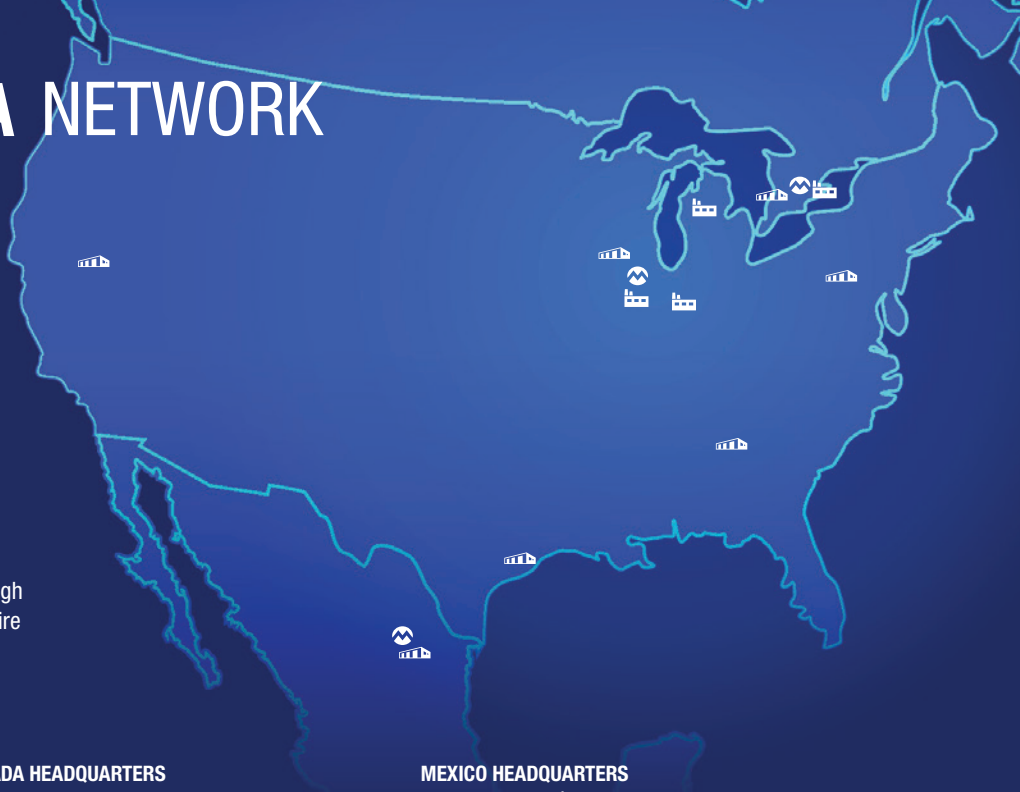

## CORPORATE HEADQUARTERS

### NORTH AMERICAN HEADQUARTERS

150 N Martingale Road, Suite 900  
Schaumburg, IL 60173  
☎ (847) 755-0360  
🌐 [kuriyama.com](http://kuriyama.com)  
✉ [customerservice@kuriyama.com](mailto:customerservice@kuriyama.com)

### CANADA HEADQUARTERS

KURI TEC CORPORATION  
140 Roy Boulevard  
Brantford, ON, Canada N3R 7K2  
☎ (519) 753-6717  
🌐 [Kuritec.com](http://Kuritec.com)  
✉ [sales@kuritec.com](mailto:sales@kuritec.com)

### MEXICO HEADQUARTERS

KURIYAMA DE MÉXICO  
Av. José Palomo Martínez # 520-20  
Parque Industrial Omolap  
Apodaca, N.L. 66633, México  
☎ +52 811 086 1870  
🌐 [Kuriyama.com.mx](http://Kuriyama.com.mx)  
✉ [servicioalcliente@kuriyama.com](mailto:servicioalcliente@kuriyama.com)



## MANUFACTURING, COMPOUNDING & PRODUCTION

### TIGERFLEX CORPORATION

1551 Pratt Blvd  
Elk Grove Village, IL 60007  
☎ (847) 640-8366

### KURIYAMA CANADA MFG.

140 Roy Boulevard  
Brantford, ON, Canada N3R 7K2  
☎ (519) 753-6717  
✉ [sales@kuritec.com](mailto:sales@kuritec.com)

### ACCUFLEX INDUSTRIAL MFG.

760 Imperial Rd N  
Guelph, ON, N1K 1Z3, Canada  
☎ (519) 836-5460

### KURITEC MANUFACTURING & KURIYAMA FIRE MFG.

2600 E. U.S. Highway 41  
Attica, IN 47918  
☎ (765) 764-6000  
🏭 (765) 764-6001

### HOSE TEC MANUFACTURING

2520 E. U.S. Highway 41  
Attica, IN 47918  
☎ (765) 762-5501 OR  
☎ (800) 878-5501  
🏭 (765) 762-5502 OR  
🏭 (800) 879-8232

### PIRANHA HOSE PRODUCTS

2500 Raymond Weigel St.  
Cadillac, MI 49601  
☎ (800) 250-5132 OR  
☎ (231) 779-4390  
🏭 (231) 779-4399



## DISTRIBUTION CENTERS AND WAREHOUSES

### USA CENTRAL DISTRIBUTION CENTER – HUNTLEY

14200 Commerce Court  
Huntley, IL 60142  
☎ (847) 755-0360

### WEST COAST WAREHOUSE – RENO

12910 Old Virginia Road,  
Suite 100  
Reno, NV 89521  
☎ (847) 755-0360

### SOUTHWEST WAREHOUSE – HOUSTON

200 Portwall Street, Suite 100  
Houston, TX 77029  
☎ (847) 755-0360

### NORTHEAST WAREHOUSE – CARLISLE

1600 Distribution Drive,  
Building B  
Carlisle, PA 17013  
☎ (847) 755-0360

### SOUTHEAST WAREHOUSE – ACWORTH

FORTNEY SALES CO., INC.  
4221 Cantrell Road NW  
Acworth, GA 30101  
☎ (770) 427-6528  
🏭 (770) 423-9249 OR  
🏭 (800) 423-9249

### CANADA CENTRAL DISTRIBUTION CENTER

KURI TEC CORPORATION  
575 Jack Ross Ave.  
Woodstock, ON N4V 1B6  
☎ (519) 753-6717

### MEXICO CENTRAL DISTRIBUTION CENTER

KURIYAMA DE MÉXICO  
Av. José Palomo Martínez # 520-20  
Parque Industrial Omolap  
Apodaca, N.L. 66633, México  
☎ +52 811 086 1870  
✉ [servicioalcliente@kuriyama.com](mailto:servicioalcliente@kuriyama.com)



**KURIYAMA**  
OF AMERICA, INC.

[kuriyama.com](http://kuriyama.com)

GPR43101-0726