


## SUPERCAT Flange

| Part Number | Dash Size | Hose ID Size |      | Q Flange |      | C Cut-Off Factor (mm) | T Thickness (mm) | Flange Dash Size | Weight (lbs/each) |
|-------------|-----------|--------------|------|----------|------|-----------------------|------------------|------------------|-------------------|
|             |           | (in)         | (mm) | (in)     | (mm) |                       |                  |                  |                   |
| F-1212-CFLS | 12        | 3/4          | 19.0 | 1.63     | 41.3 | 85.5                  | 14.3             | 12               | 1.26              |
| F-1216-CFLS | 12        | 3/4          | 19.0 | 1.88     | 47.6 | 85.5                  | 14.3             | 16               | 1.41              |
| F-1616-CFLS | 16        | 1            | 25.4 | 1.88     | 47.6 | 94.5                  | 14.3             | 16               | 1.87              |
| F-1620-CFLS | 16        | 1            | 25.4 | 2.13     | 54.0 | 94.5                  | 14.3             | 20               | 2.05              |
| F-2020-CFLS | 20        | 1 1/4        | 31.8 | 2.13     | 54.0 | 92.0                  | 14.3             | 20               | 2.26              |
| F-2024-CFLS | 20        | 1 1/4        | 31.8 | 2.50     | 63.5 | 87.0                  | 14.3             | 20               | 2.26              |
| F-2424-CFLS | 24        | 1 1/2        | 38.1 | 2.50     | 63.5 | 89.0                  | 14.3             | 24               | 2.40              |
| F-3232-CFLS | 32        | 2            | 50.8 | 3.12     | 79.4 | 105.0                 | 14.3             | 32               | 3.50              |

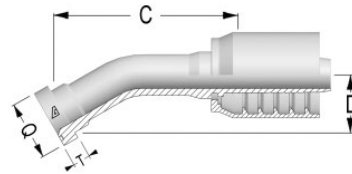

## 22.5° SUPERCAT Flange

| Part Number | Dash Size | Hose ID Size |      | Q Flange |      | C Cut-Off Factor (mm) | T Thickness (mm) | D Drop (mm) | Flange Dash Size | Weight (lbs/each) |
|-------------|-----------|--------------|------|----------|------|-----------------------|------------------|-------------|------------------|-------------------|
|             |           | (in)         | (mm) | (in)     | (mm) |                       |                  |             |                  |                   |
| F-1212-CFL2 | 12        | 3/4          | 19.0 | 1.63     | 41.3 | 116.0                 | 14.2             | 21.0        | 12               | 1.34              |
| F-1216-CFL2 | 12        | 3/4          | 19.0 | 1.88     | 47.6 | 121.0                 | 14.2             | 17.0        | 16               | 1.52              |
| F-1616-CFL2 | 16        | 1            | 25.4 | 1.88     | 47.6 | 106.0                 | 14.2             | 17.0        | 16               | 1.72              |
| F-1620-CFL2 | 15        | 1            | 25.4 | 2.13     | 54.0 | 129.0                 | 14.2             | 18.0        | 20               | 2.02              |
| F-2020-CFL2 | 20        | 1 1/4        | 31.8 | 2.13     | 54.0 | 162.0                 | 14.2             | 25.5        | 20               | 2.58              |
| F-2024-CFL2 | 20        | 1 1/4        | 31.8 | 2.50     | 63.5 | 170.0                 | 14.2             | 22.0        | 24               | 2.65              |

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.