

Applications, Construction, Temperature, Features & Advantages and Lengths

① **Pressure Testing** - All Piranha Sewer Hoses are 100% pressure tested.

GENERAL APPLICATIONS:

- **High Pressure Sewer Cleaning** – Applications for commercial, industrial and residential.
- **Tight Pipe Bends** – Slick, Slither® cover affords an easier handling hose to get the job done.

CONSTRUCTION:

- **Inner Tube** – Yellow seamless thermoplastic tube. (Sewer Cleaning Hoses: 2,500 PSI, 3,000 PSI, 4,000 PSI & 5,000 PSI)
- **Reinforcement** - High tensile one or two synthetic fiber braids.
- **Cover** – Polyurethane abrasion resistant. (Standard)

SERVICE TEMPERATURE RANGE

- See individual hose specifications for temperature ratings.

FEATURES & ADVANTAGES:

- **Materials** – Constructed to provide rugged and reliable service under the most severe and demanding conditions.
- **Yellow Seamless Thermoplastic Tube** - Provides maximum resistance to hydrolysis.
- **High Tensile One or Two Synthetic Fiber Braids** – Contributes to low volumetric expansion and eliminates loss of strength from moisture absorption.
- **Abrasion Resistant Polyurethane** – Polyurethane cover provides exceptional cut, abrasion and fungus resistance.
- **Optional Slither® Cover** – Cover is ultra slippery; allows hose to maneuver around and through difficult sewer bends.
- **End Fittings** – Hoses are assembled Male X Male NPT threads as a standard, but other thread configurations are available.

INDUSTRY STANDARDS:



- **Orange Cover** = 2,500 PSI
- **Blue Cover** = 3,000 PSI
- **Green Cover** = 4,000 PSI
- **Black Cover** = 4,000 PSI (High Burst)

LENGTHS:


- **Standard Lengths** – Continually leading to create, establish and stock industry standard lengths.
- **Custom Lengths** – Available and made to order.

HOW TO READ A PART NUMBER:

SPOR-MM16X250

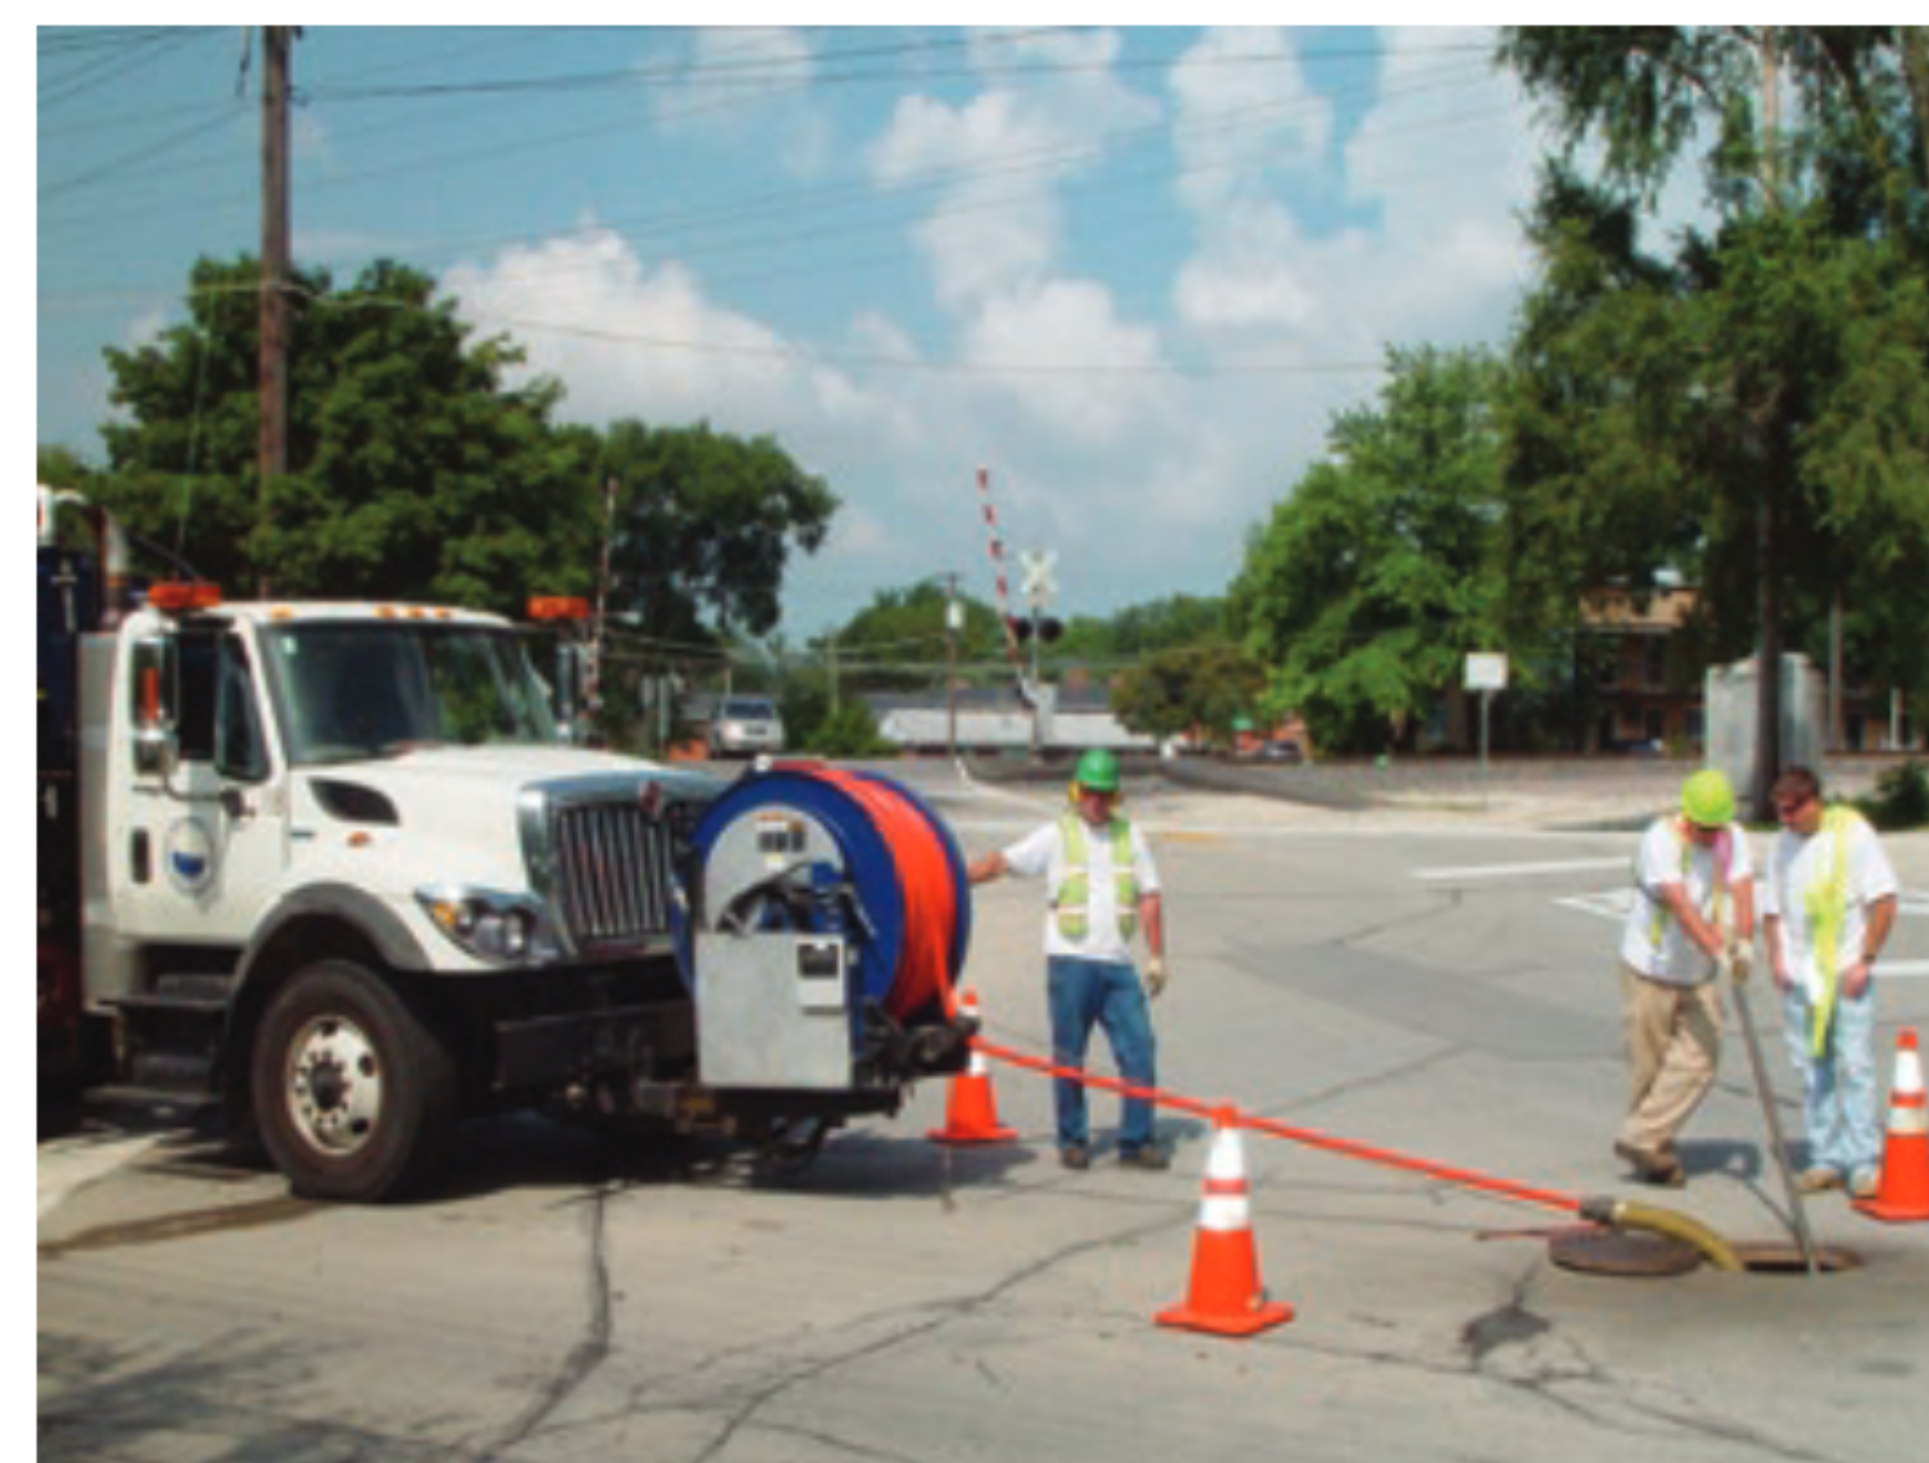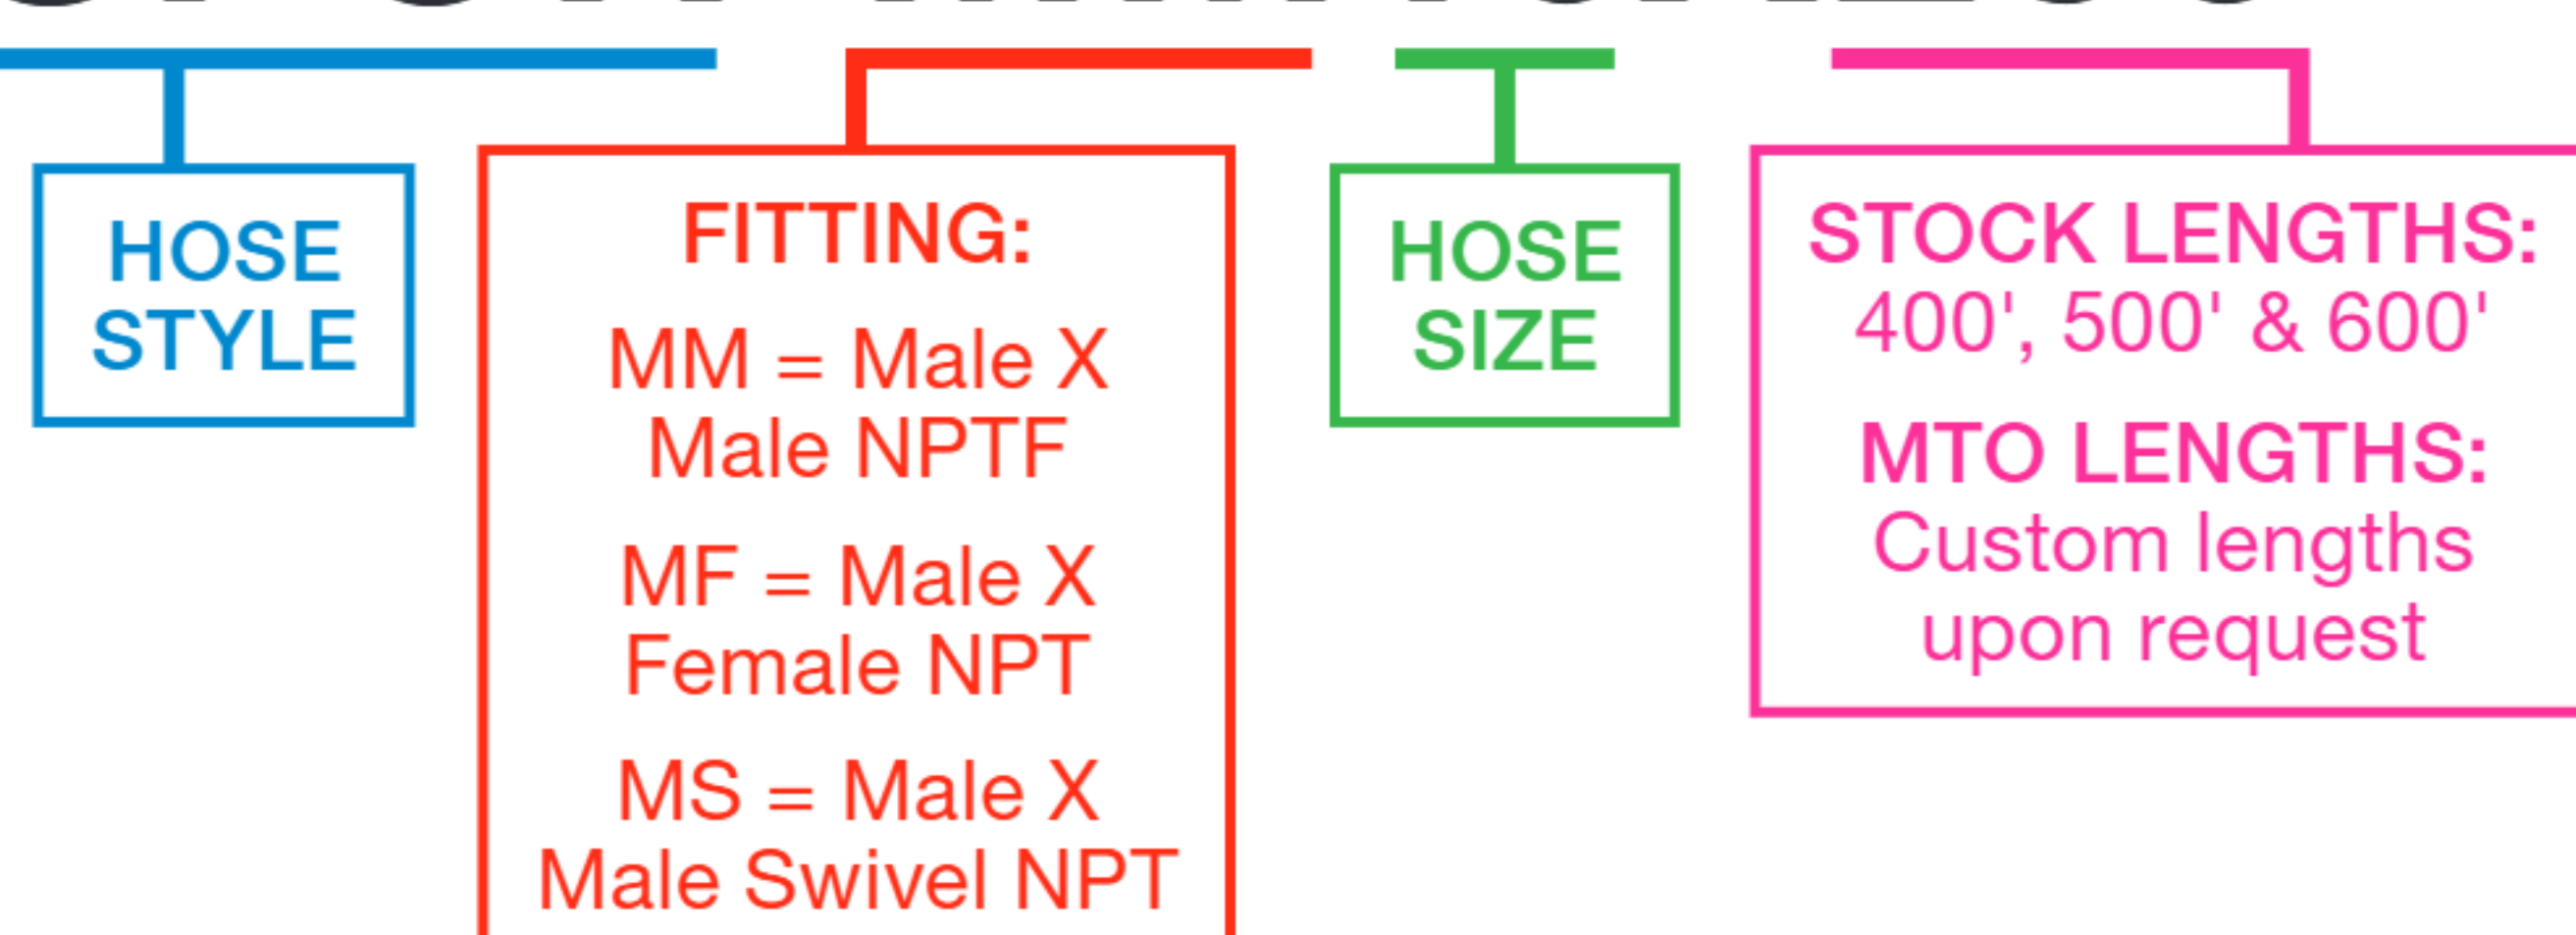

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

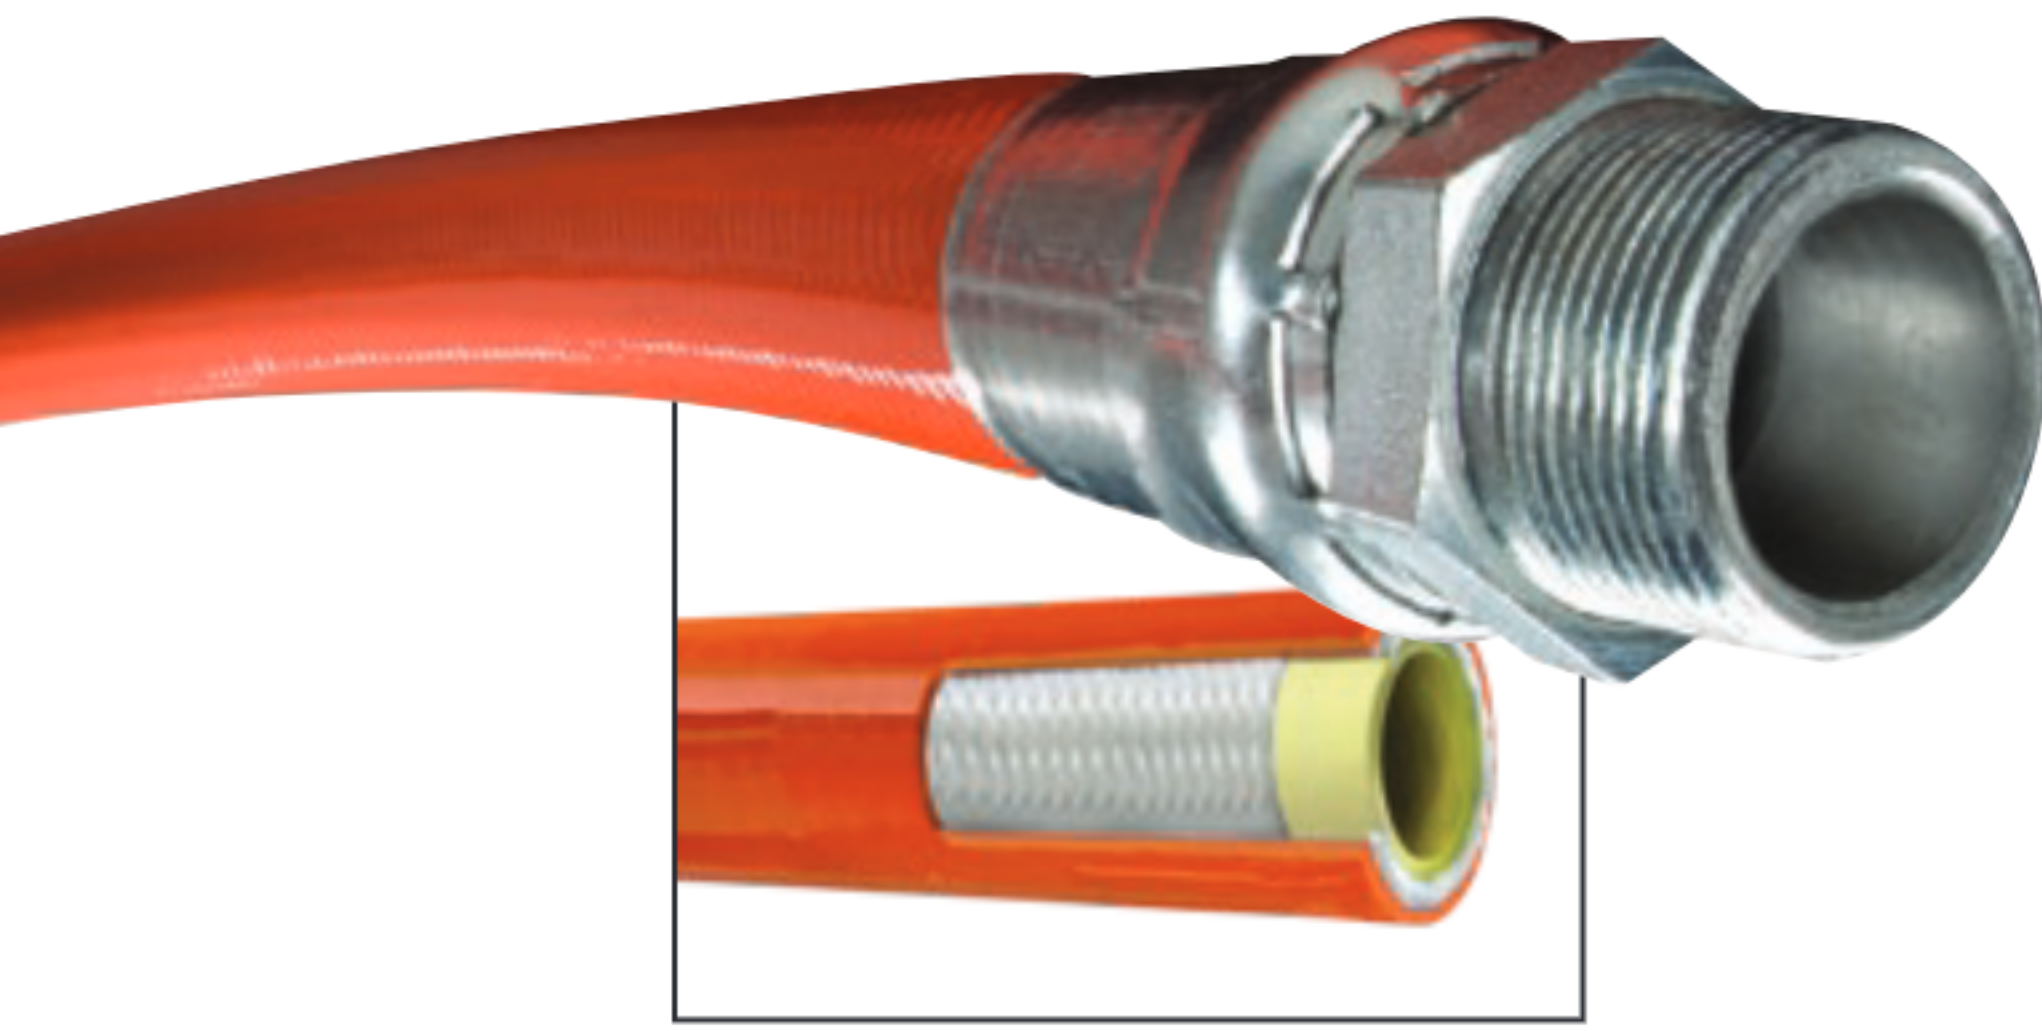

SPOR Series

2,500 PSI

CONSTRUCTION

A yellow seamless polyolefin tube, single high tensile synthetic fiber braid reinforcement and abrasion resistant orange polyether-urethane cover.


SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +150°F (+66°C)



◀ SCAN OR VISIT
[KOA.link/SPOR](https://koha.link/SPOR)

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)	
SPOR-10	5/8	16.0	0.96	24.4	2500	172.4	6250	430.9	4.00	101.6	0.19
SPOR-12	3/4	19.1	1.18	30.0	2500	172.4	6250	430.9	5.00	127.0	0.28
SPOR-16	1	25.4	1.46	37.1	2500	172.4	6250	430.9	6.00	152.4	0.40
SPOR-20	1 1/4	32.0	1.80	45.7	2500	172.4	6250	430.9	8.00	203.2	0.59
SPOR-24	1 1/2	38.1	2.18	55.4	2500	172.4	6250	430.9	15.00	381.0	0.94

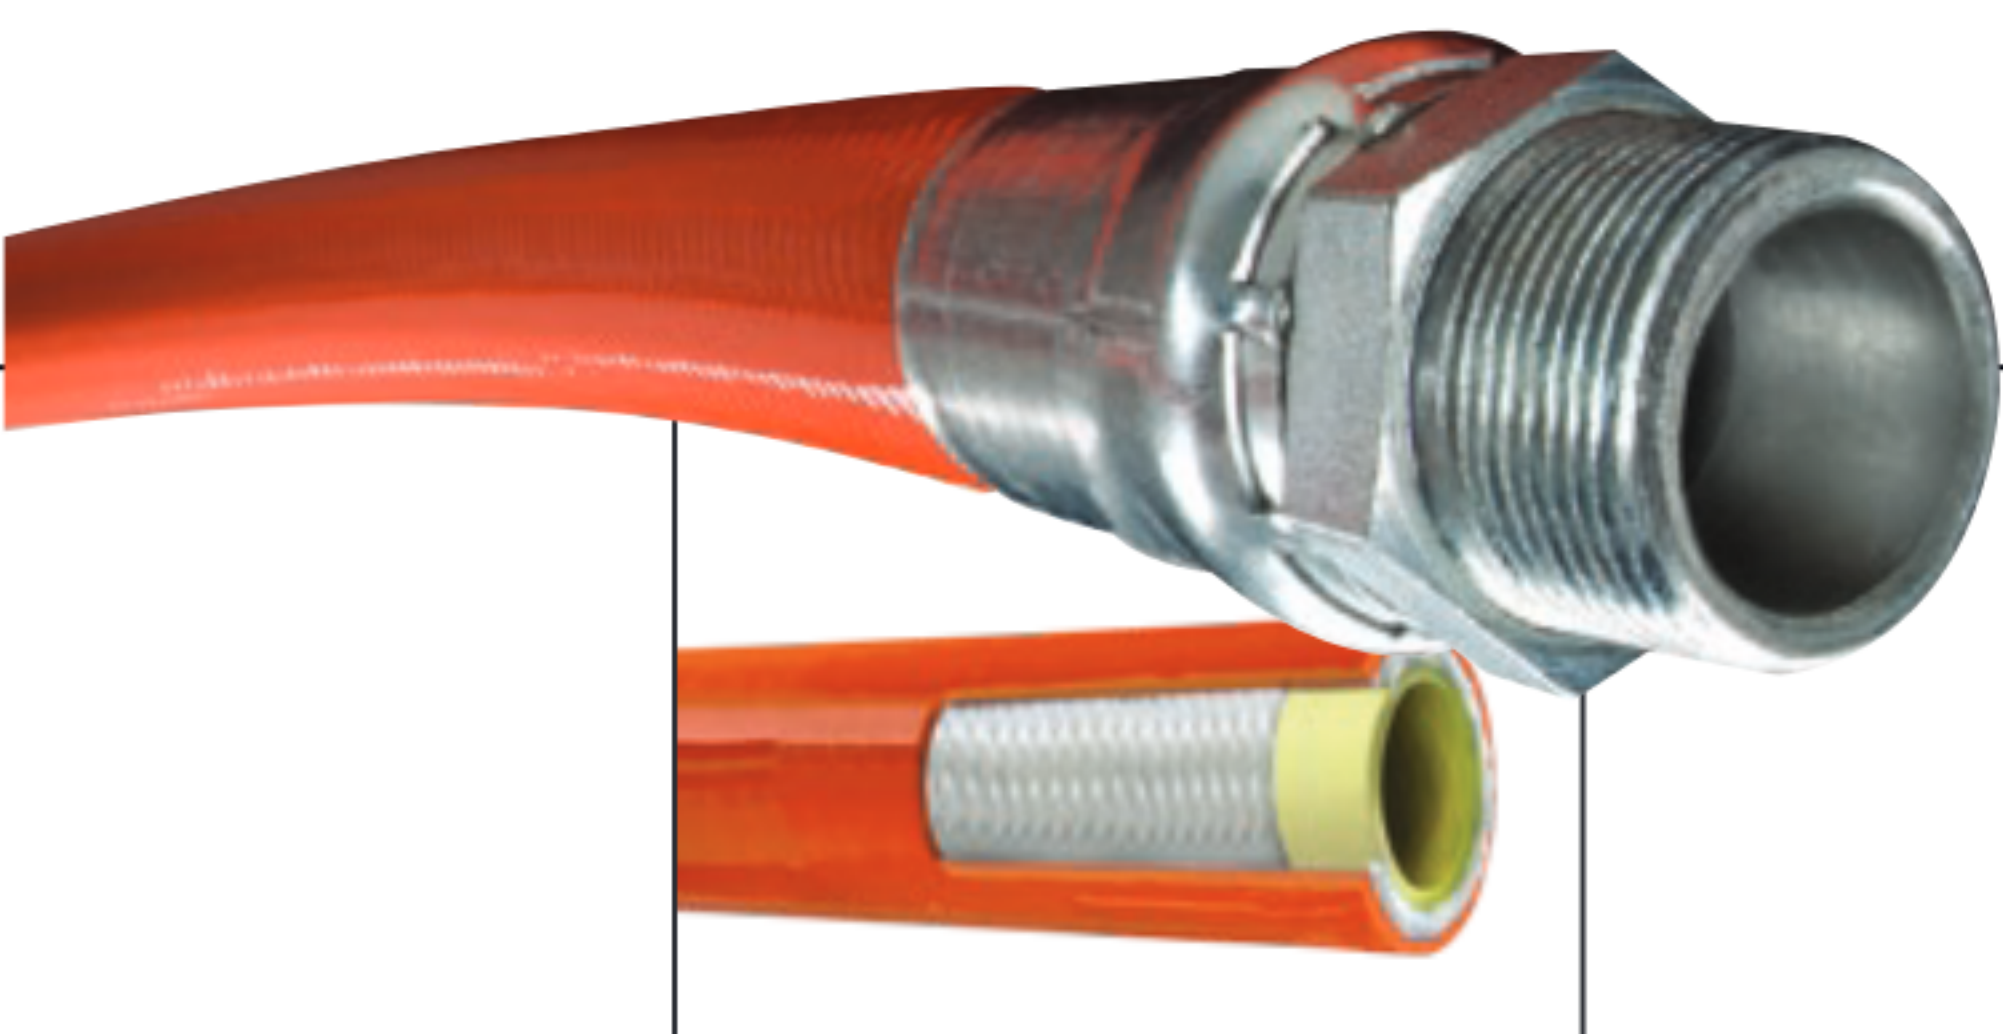

SLITHER® SLSPOR Series

2,500 PSI

CONSTRUCTION

A yellow seamless polyolefin tube, single high tensile synthetic fiber braid reinforcement and abrasion resistant Slither® orange polyether-urethane cover.

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +150°F (+66°C)



◀ SCAN OR VISIT
[KOA.link/SLSPOR](https://koha.link/SLSPOR)

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)	
SLSPOR-10	5/8	16.0	0.96	24.4	2500	172.4	6250	430.9	4.00	101.6	0.19
SLSPOR-12	3/4	19.1	1.18	30.0	2500	172.4	6250	430.9	5.00	127.0	0.28
SLSPOR-16	1	25.4	1.46	37.1	2500	172.4	6250	430.9	6.00	152.4	0.40
SLSPOR-20	1 1/4	32.0	1.80	45.7	2500	172.4	6250	430.9	8.00	203.2	0.59
SLSPOR-24	1 1/2	38.1	2.18	55.4	2500	172.4	6250	430.9	15.00	381.0	0.94

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.