

Applications, Construction, Temperature, Features & Advantages and Lengths

① **Pressure Testing** - All Piranha Sewer Hoses are 100% pressure tested.

GENERAL APPLICATIONS:

- **High Pressure Sewer Cleaning** – Applications for commercial, industrial and residential.
- **Tight Pipe Bends** – Slick, Slither® cover affords an easier handling hose to get the job done.

CONSTRUCTION:

- **Inner Tube** – Yellow seamless thermoplastic tube. (Sewer Cleaning Hoses: 2,500 PSI, 3,000 PSI, 4,000 PSI & 5,000 PSI)
- **Reinforcement** - High tensile one or two synthetic fiber braids.
- **Cover** – Polyurethane abrasion resistant. (Standard)

SERVICE TEMPERATURE RANGE

- See individual hose specifications for temperature ratings.

FEATURES & ADVANTAGES:

- **Materials** – Constructed to provide rugged and reliable service under the most severe and demanding conditions.
- **Yellow Seamless Thermoplastic Tube** - Provides maximum resistance to hydrolysis.
- **High Tensile One or Two Synthetic Fiber Braids** – Contributes to low volumetric expansion and eliminates loss of strength from moisture absorption.
- **Abrasion Resistant Polyurethane** – Polyurethane cover provides exceptional cut, abrasion and fungus resistance.
- **Optional Slither® Cover** – Cover is ultra slippery; allows hose to maneuver around and through difficult sewer bends.
- **End Fittings** – Hoses are assembled Male X Male NPT threads as a standard, but other thread configurations are available.

INDUSTRY STANDARDS:



- **Orange Cover** = 2,500 PSI
- **Blue Cover** = 3,000 PSI
- **Green Cover** = 4,000 PSI
- **Black Cover** = 4,000 PSI (High Burst)

LENGTHS:

- **Standard Lengths** – Continually leading to create, establish and stock industry standard lengths.
- **Custom Lengths** – Available and made to order.

HOW TO READ A PART NUMBER:

SPOR-MM16X250

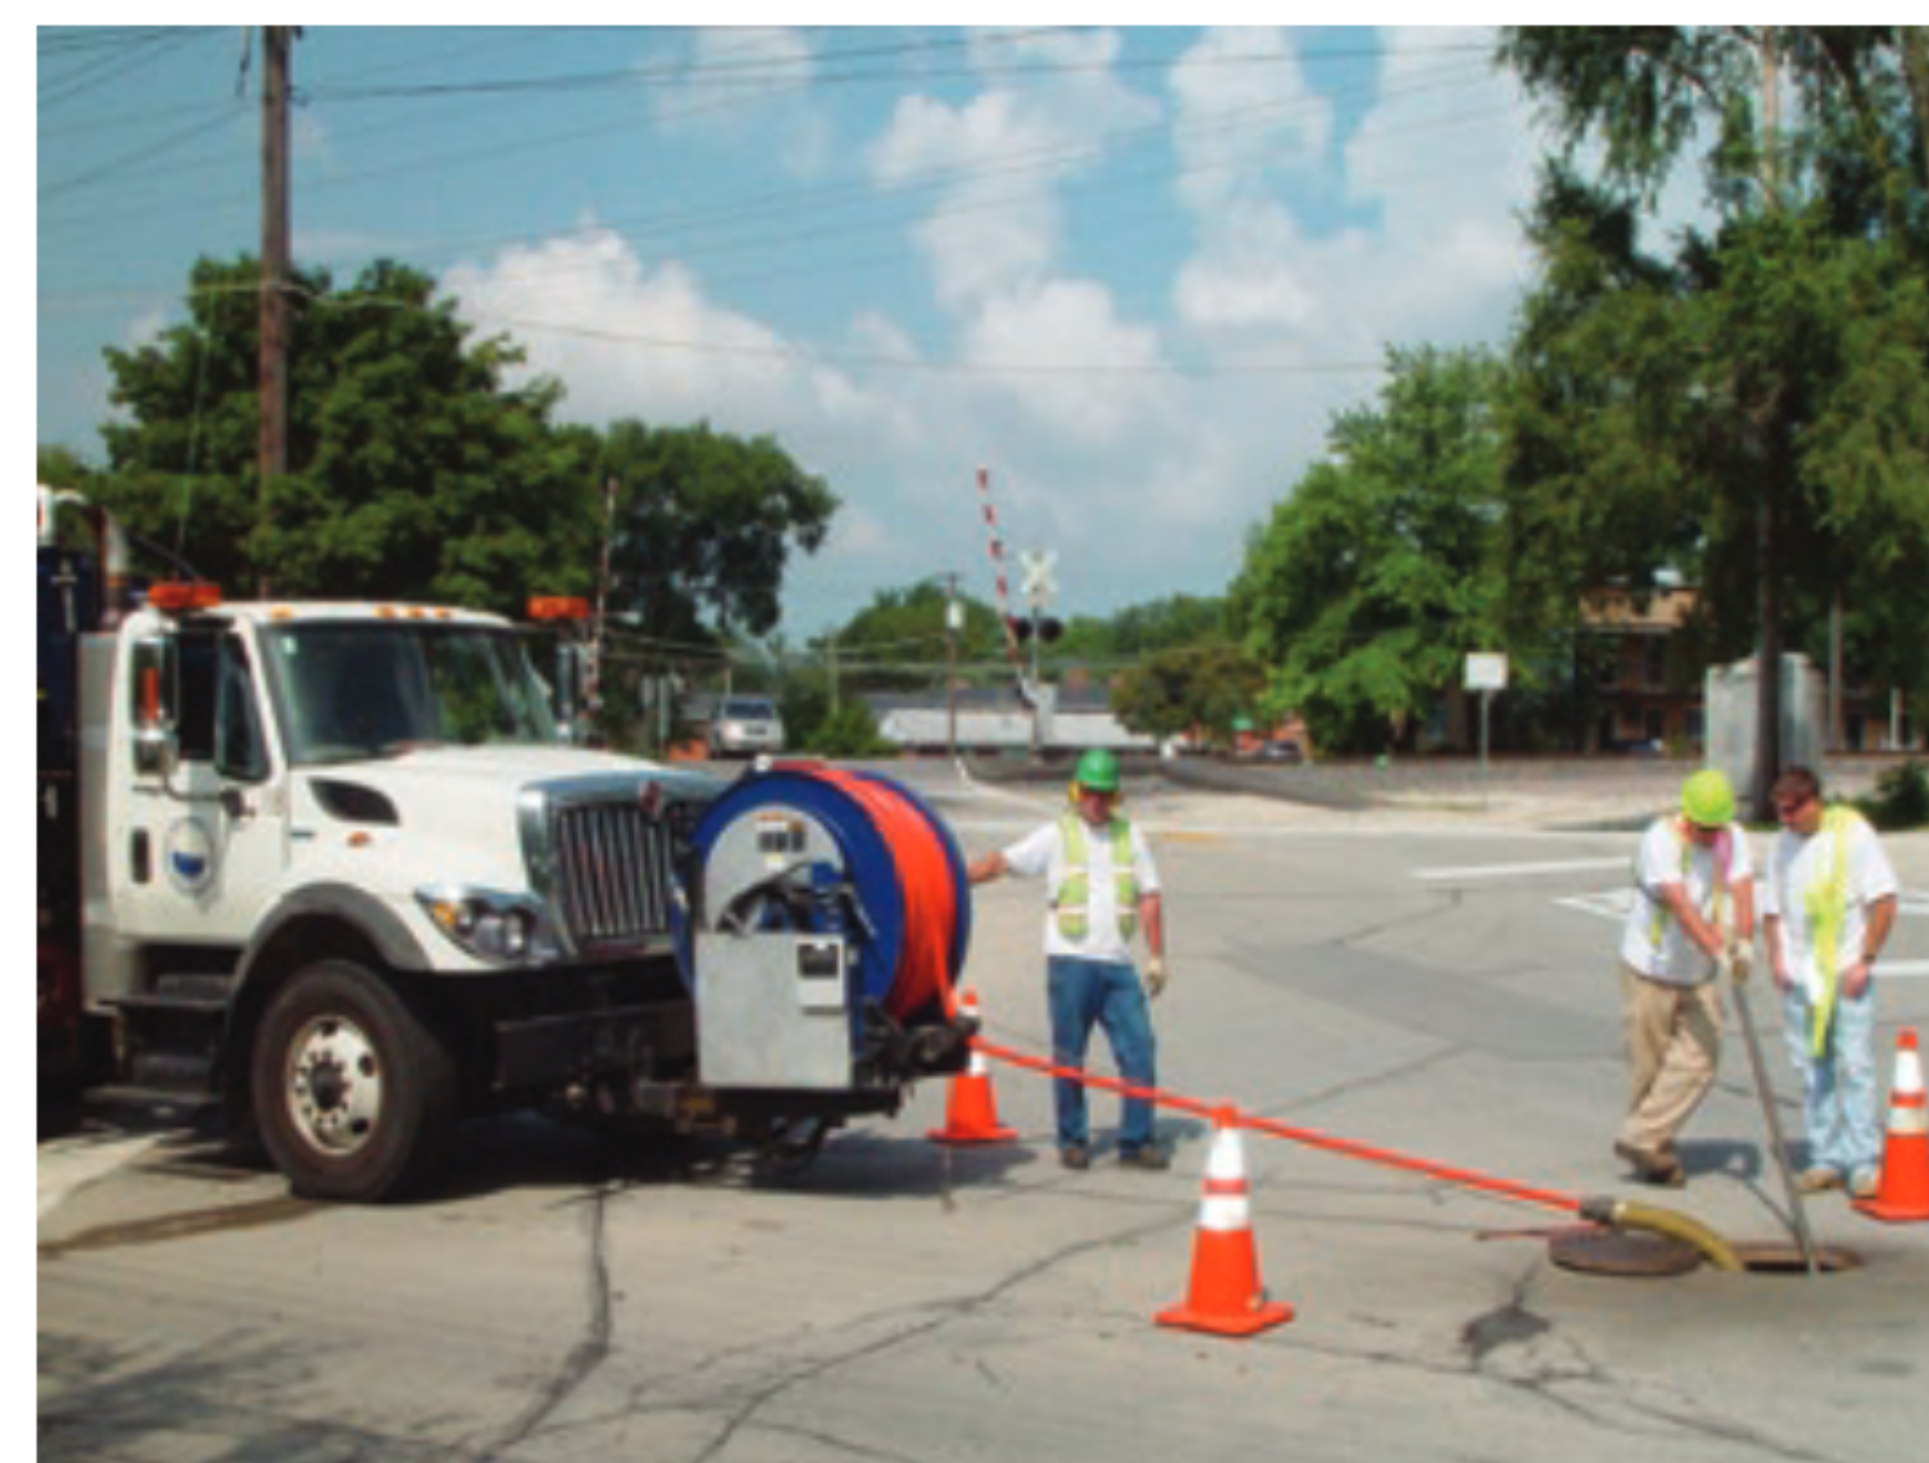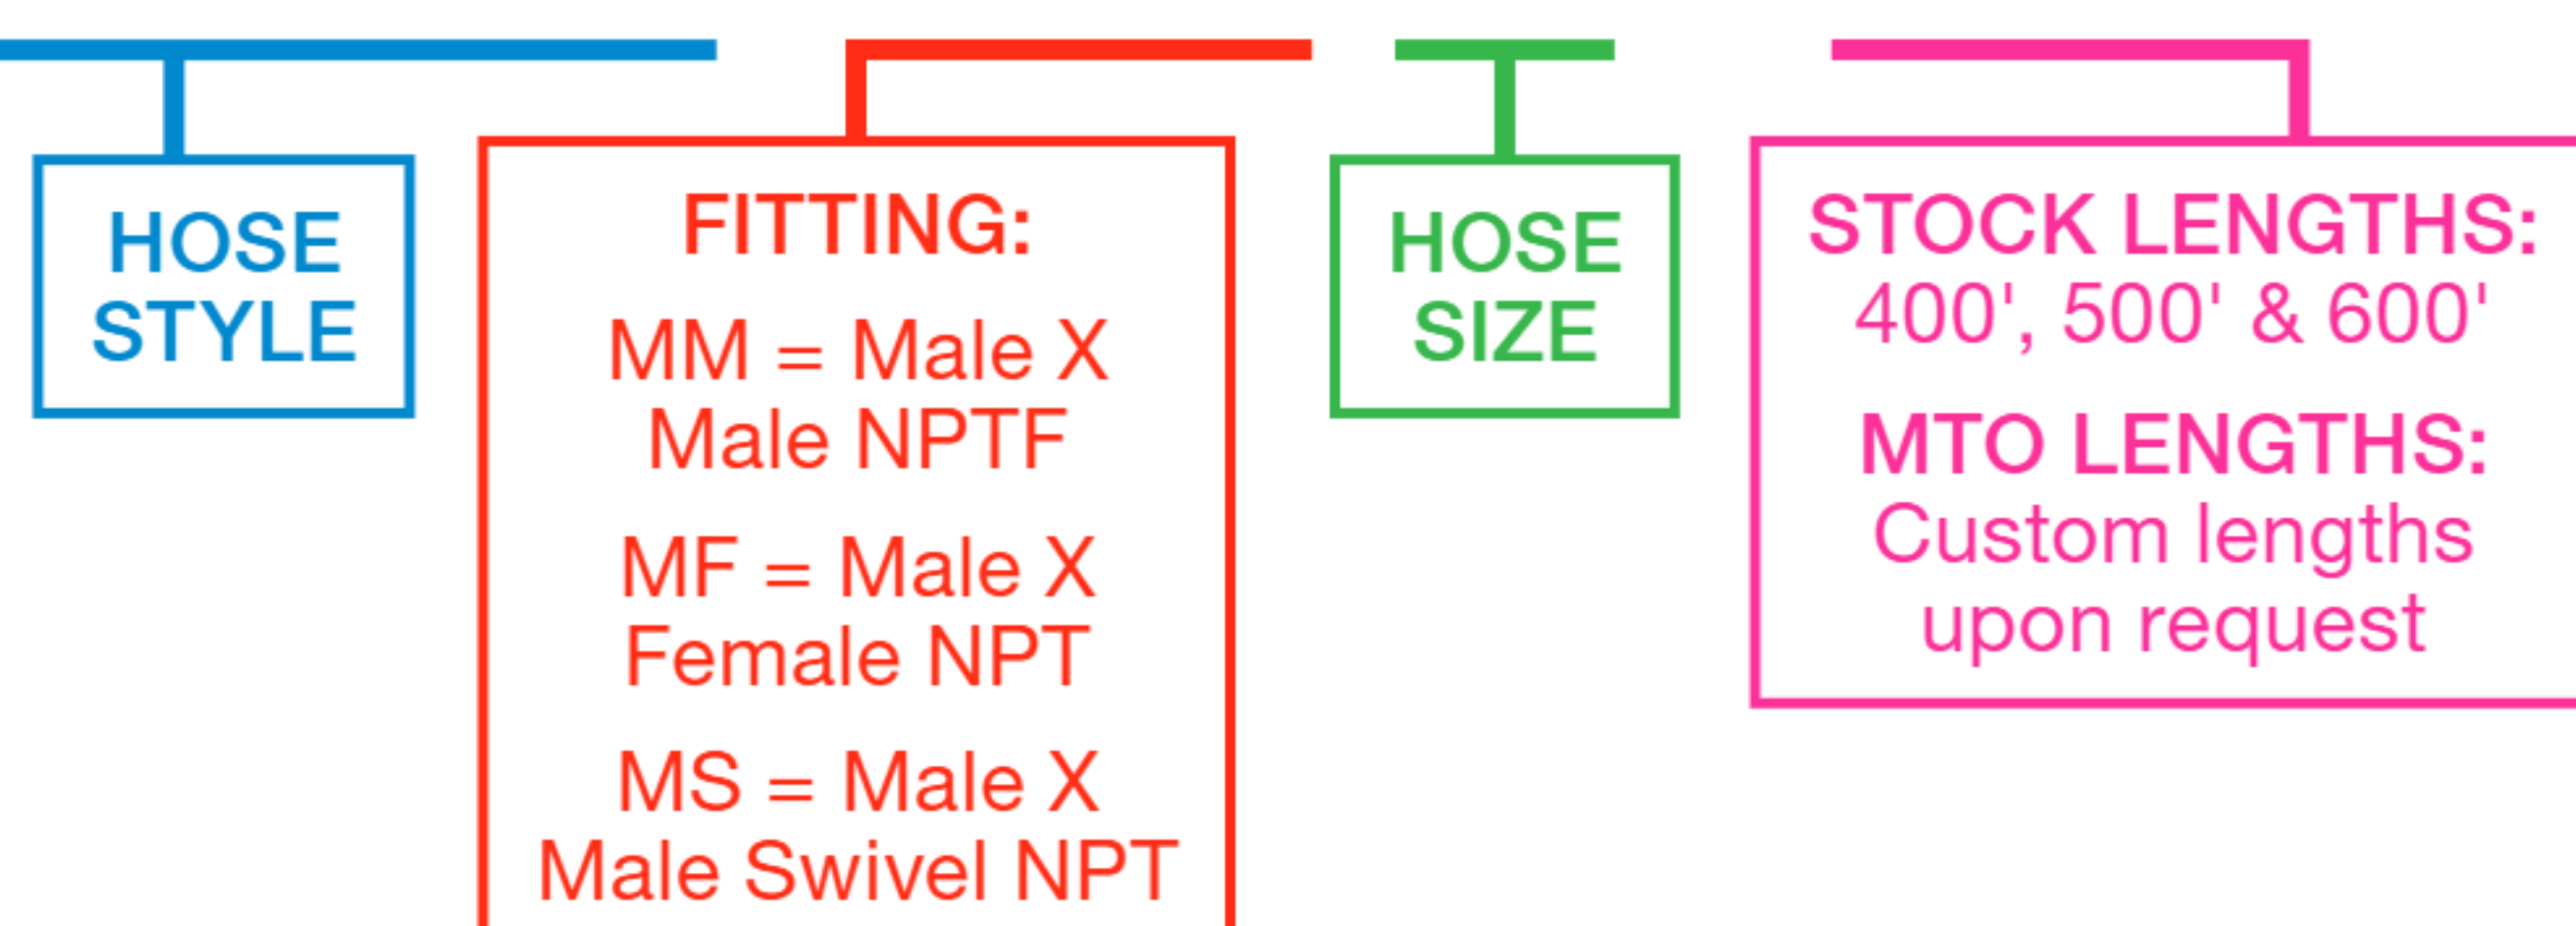

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



HPBU Series

3,000 PSI

CONSTRUCTION
A yellow seamless polyolefin tube, double high tensile synthetic fiber braid reinforcement and abrasion resistant blue polyether-urethane cover.


SERVICE TEMPERATURE RANGE
-40°F (-40°C) to +150°F (+66°C)



◀ SCAN OR VISIT
[KOA.link/HPBU](https://koi.link/HPBU)

View Up To Date Info

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)	
HPBU-12	3/4	19.1	1.18	30.0	3000	206.8	7500	517.1	5.00	127.0	0.29
HPBU-16	1	25.4	1.48	37.6	3000	206.8	7500	517.1	8.00	203.2	0.41
HPBU-20	1 1/4	31.2	1.80	45.7	3000	206.8	7500	517.1	10.00	234.0	0.59

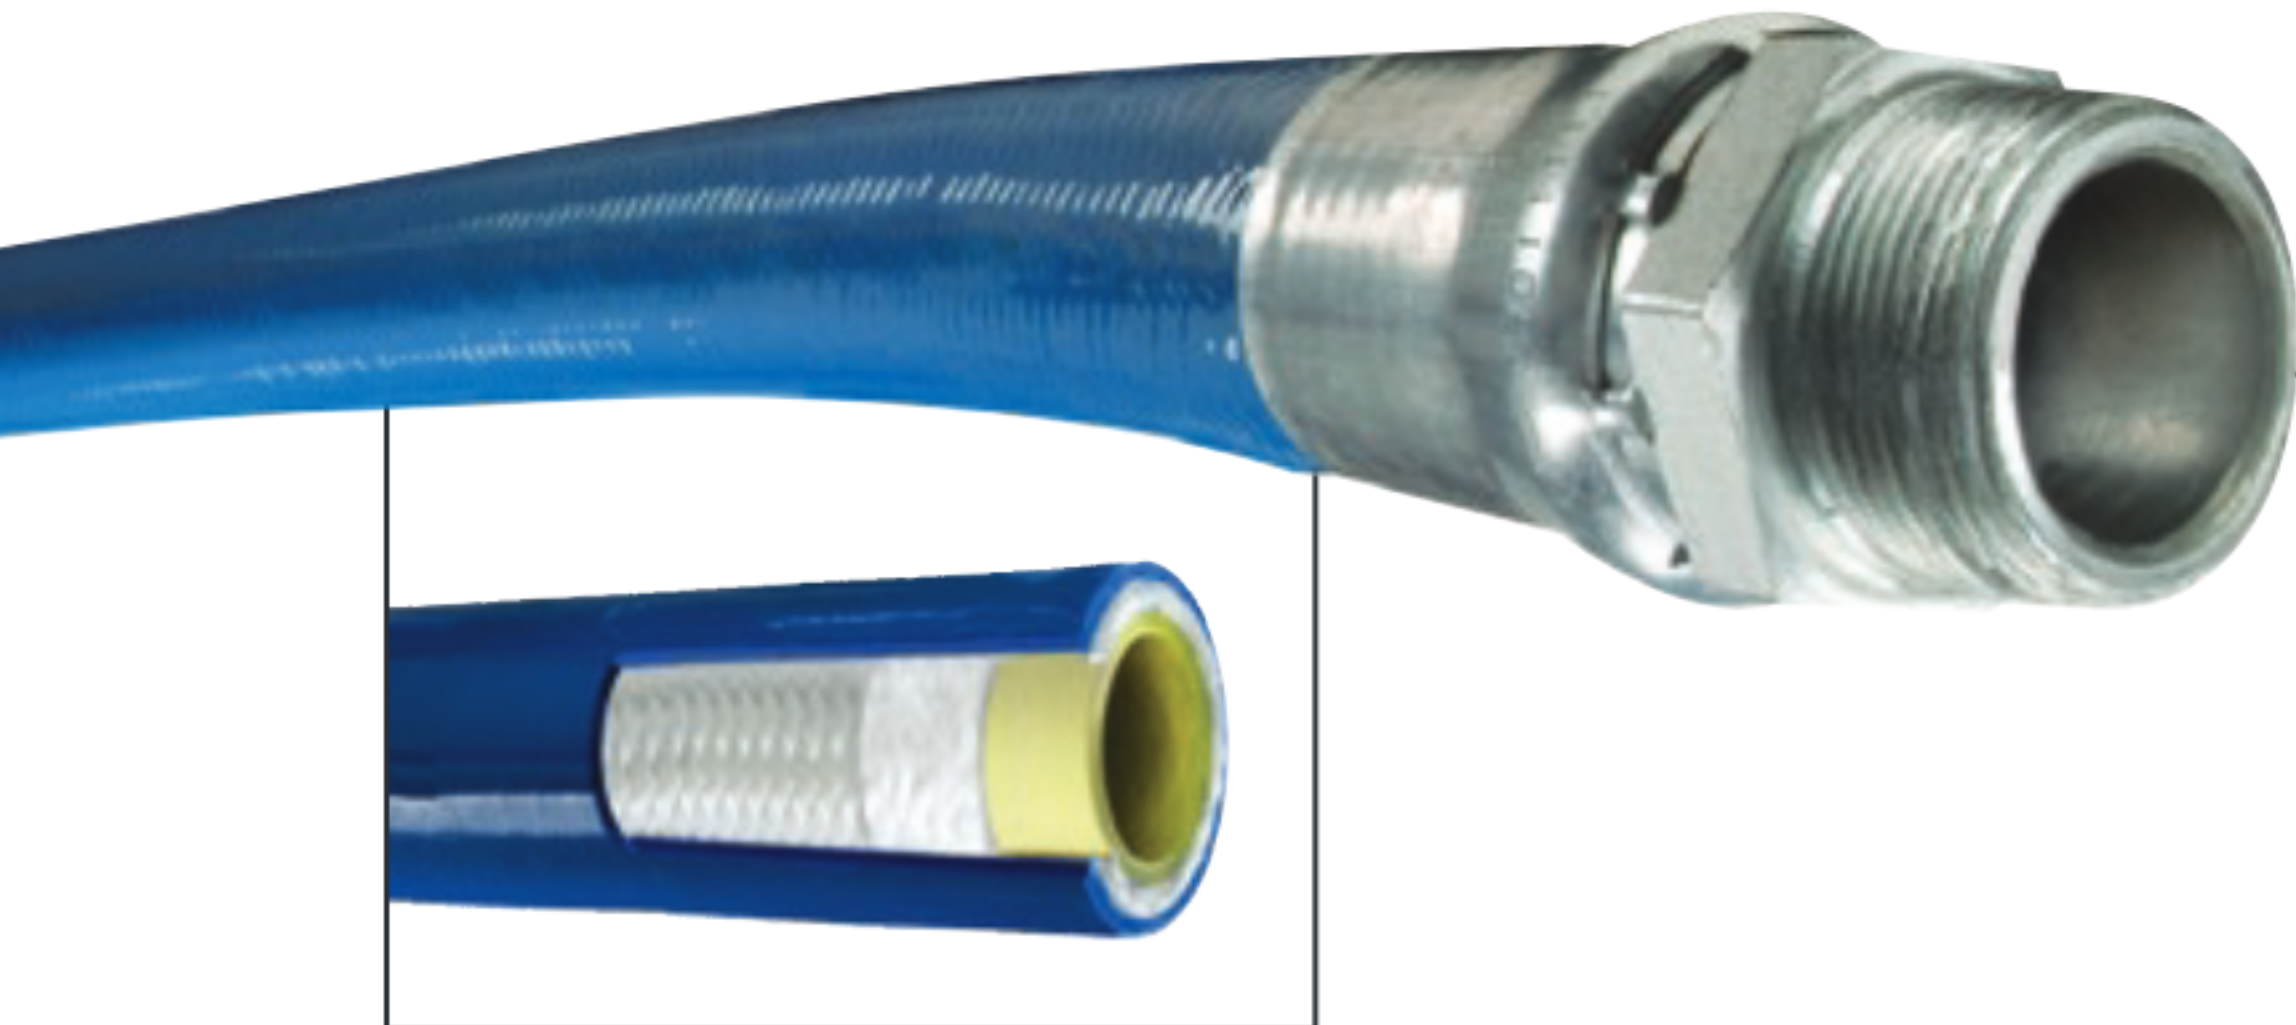

SLITHER® SLHPBU Series

3,000 PSI

CONSTRUCTION
A yellow seamless polyolefin tube, double high tensile synthetic fiber braid reinforcement and abrasion resistant Slither® blue polyether-urethane cover.

SERVICE TEMPERATURE RANGE
-40°F (-40°C) to +150°F (+66°C)



◀ SCAN OR VISIT
[KOA.link/SLHPBU](https://koi.link/SLHPBU)

View Up To Date Info

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)	
SLHPBU-12	3/4	19.1	1.18	30.0	3000	206.8	7500	517.1	5.00	127.0	0.29
SLHPBU-16	1	25.4	1.48	37.6	3000	206.8	7500	517.1	8.00	203.2	0.41
SLHPBU-20	1 1/4	31.2	1.80	45.7	3000	206.8	7500	517.1	10.00	234.0	0.59

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.