




Piranha Pink™

SPPK-MM Series

2,500 PSI Sewer Cleaning Hose

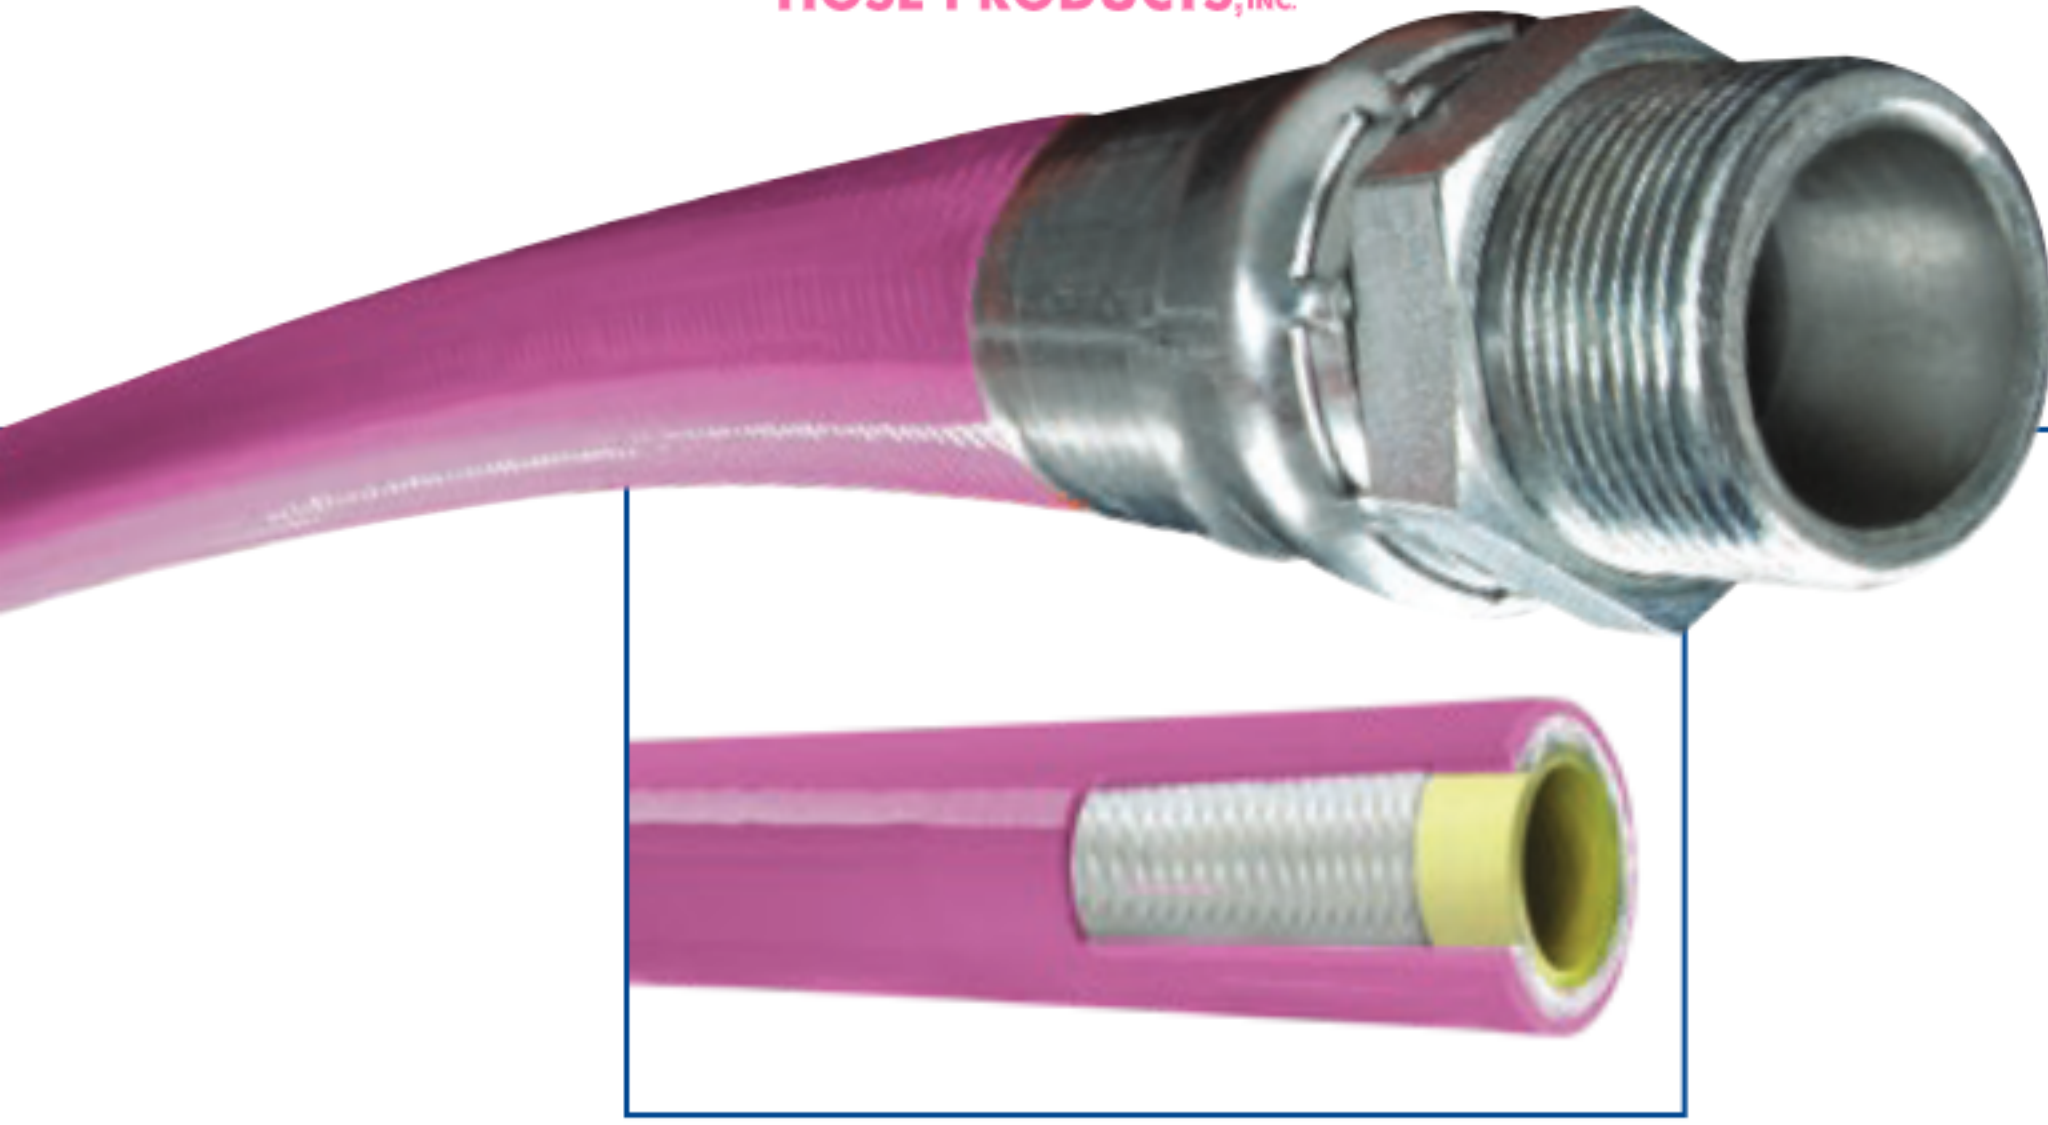


CONSTRUCTION

A yellow polyolefin tube, single high tensile synthetic fiber braid reinforcement and abrasion resistant pink polyether-urethane cover

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +150°F (+66°C)*

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)		
SPPK-MM16x400	1	25.4	1.46	37.1	2500	172.4	6250	430.9	6.00	152.4	400	0.40
SPPK-MM16x600	1	25.4	1.46	37.1	2500	172.4	6250	430.9	6.00	152.4	600	0.40

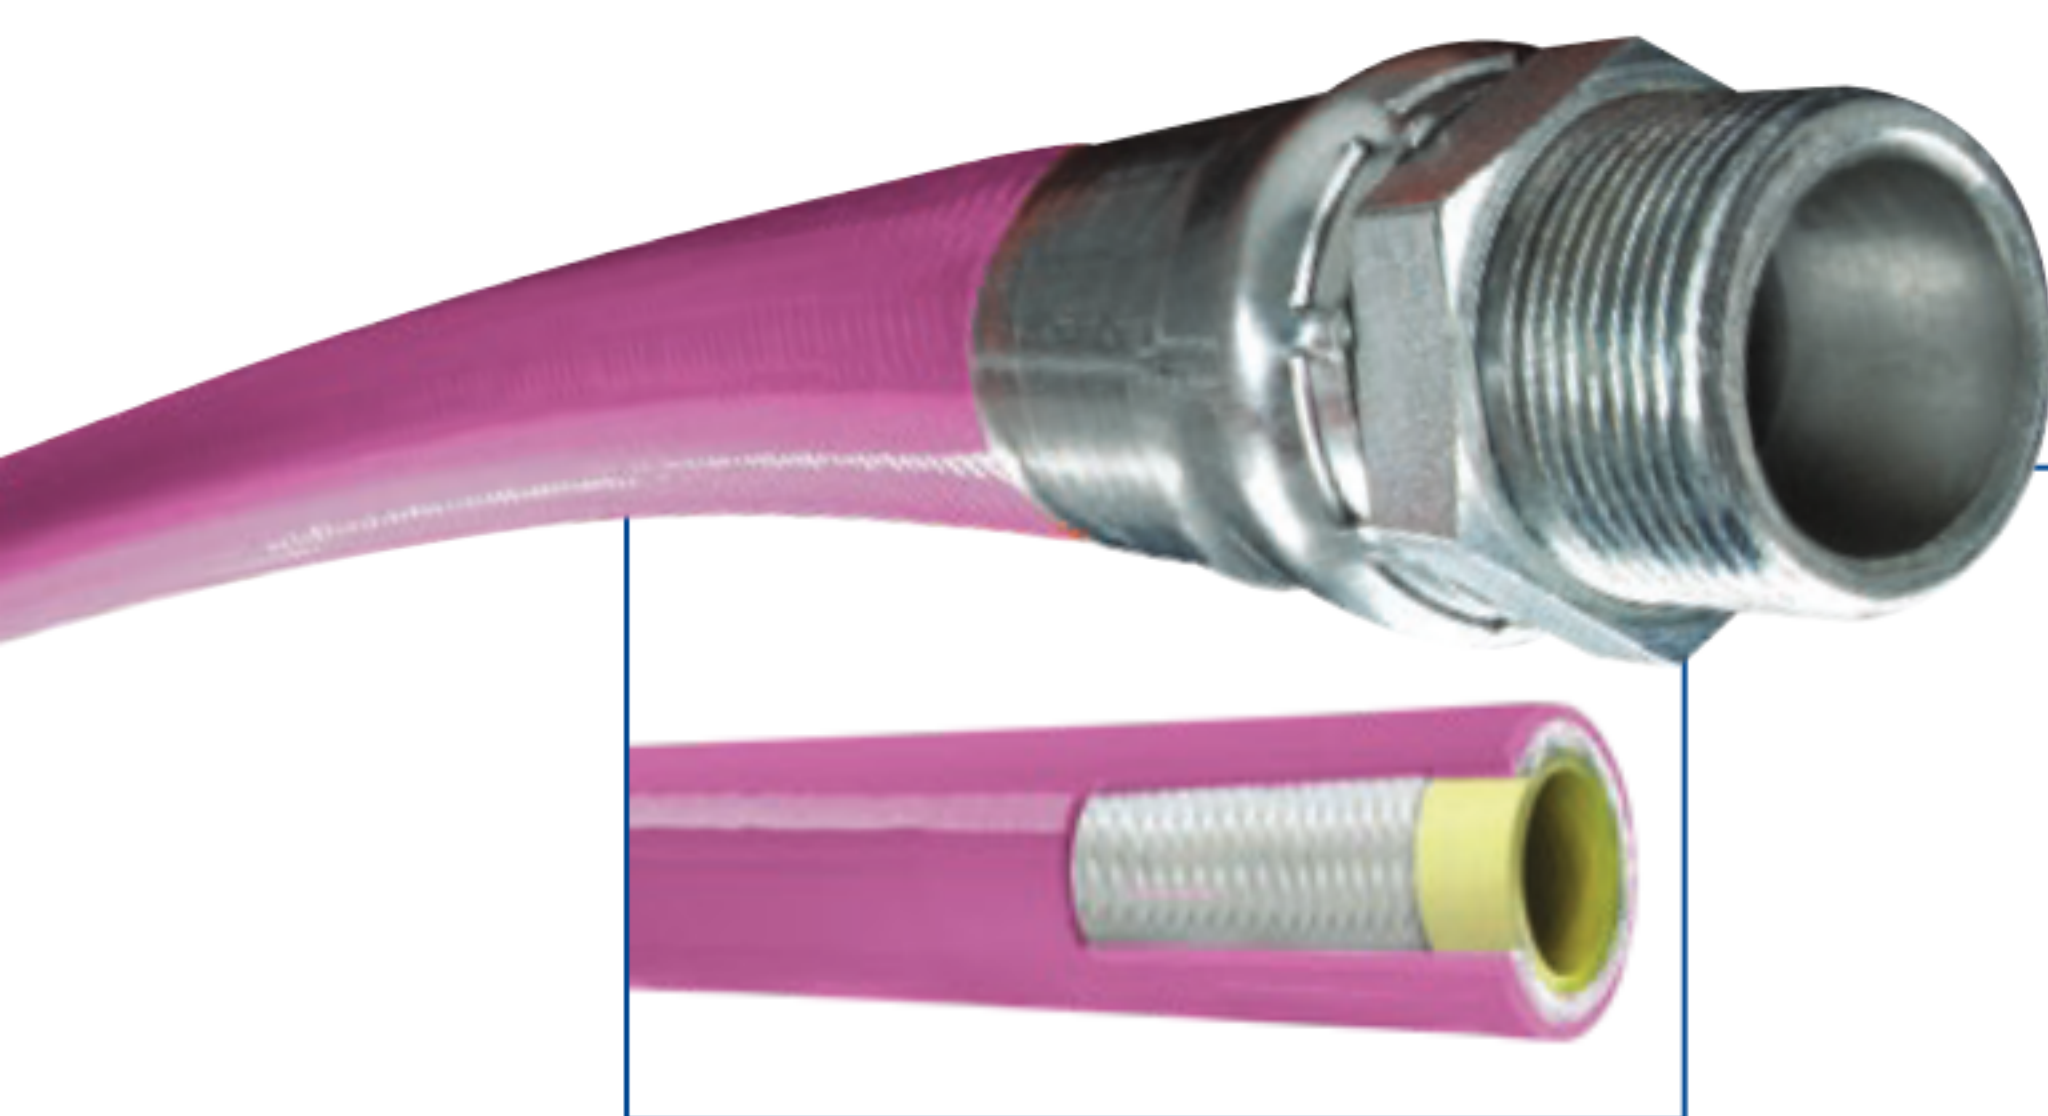

Piranha Pink™

LLPK-MM Series

4,000 PSI Jetting Line Hose



CONSTRUCTION

A pink polyolefin tube, double high tensile synthetic fiber braid reinforcement and abrasion resistant pink polyether-urethane cover

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +190°F (+66°C)*

Series Number	ID		OD		Max. Working Pressure		Min. Burst Pressure		Min. Bend Radius		Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	(psi)	(bar)	(psi)	(bar)	(in)	(mm)		
LLPK-MM08x200	1/2	12.8	0.83	21.2	4000	275.8	10,000	689.5	4.00	101.6	200	0.16
LLPK-MM08x500	1/2	12.8	0.83	21.2	4000	275.8	10,000	689.5	4.00	101.6	500	0.16



QBEE™ Series

Polyethylene Hose Guard



CONSTRUCTION

Flexible polyethylene (LDPE) tube with polyethylene (LDPE) ribs and cuffed ends

SERVICE TEMPERATURE RANGE

-40°F (-40°C) to +150°F (+65°C)*

Part Number	ID		OD		Working Pressure at 68°F (psi)	Vacuum Rating Hg at 68°F (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ea)
	(in)	(mm)	(in)	(mm)					
QBEE3x3	3	76.2	4.06	103.1	7	29	6.5	3	4.80

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

* Actual service temperature range is application dependent.