



# MH™ Series “Marine Hose”

## PVC Suction Hose

GENERAL APPLICATIONS

- Drain lines
- Marine bilge discharge
- Marine plumbing
- Recreational vehicle (RV) plumbing

CONSTRUCTION

PVC tube with rigid PVC helix

SERVICE TEMPERATURE RANGE

-4°F (-20°C) to +150°F (+65°C)\*

*\*Actual service temperature range is application dependent.*

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/MH](https://koya.link/MH)




FEATURES AND ADVANTAGES

- **Odor-resistant Tube** – Special additives help eliminate the build-up of unwanted odors.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Easy Installation** – Ideal for working in confined areas. Permits installers to make smooth, tight turns. Requires fewer fittings than rigid pipe.

CUSTOM MOLDED CUFF

1 1/2" Molded cuff is designed for use with Tigerflex® Series MH150 marine hose.

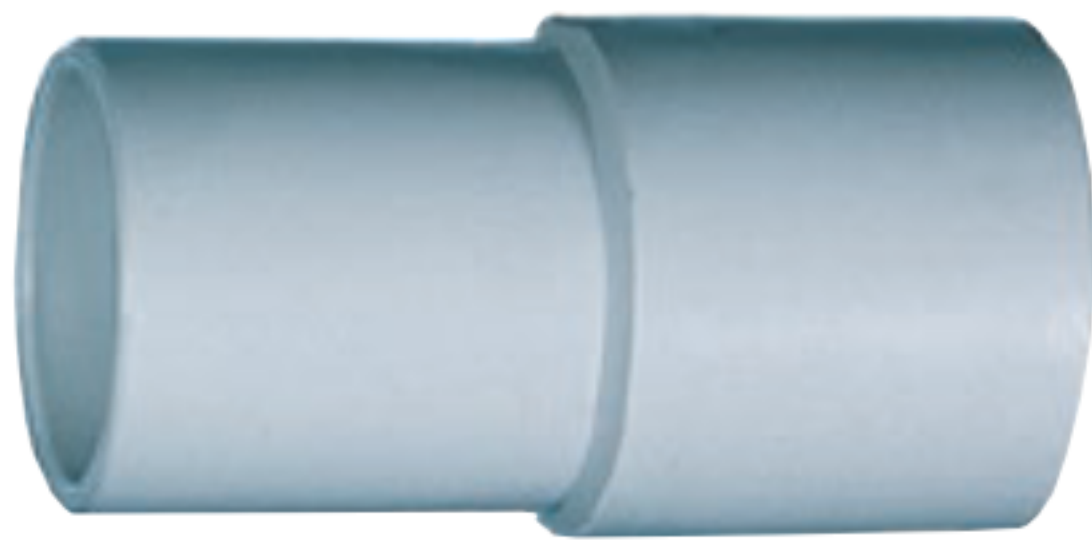

Part No. A2150L1

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in) at 68°F	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
MH100	1	25.4	1.22	31.0	45	15	Full	24	1	100	0.15
MH125	1 1/4	32.0	1.49	38.0	40	12	Full	24	1 1/2	100	0.20
MH150	1 1/2	38.1	1.77	45.0	40	12	Full	24	2	100	0.25
MH200	2	50.8	2.32	59.0	35	10	26	20	2 1/2	100	0.31

NOTES:

- Service life may vary depending on operating conditions and type of material being conveyed.

COMPLIANCES (for details see page 87)

Phthalate Free (10), RoHS (11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.