




SCAL-C Series (Aluminum Part C Swivel)

Female Coupler X Hose Shank

SCAL-E Series (Aluminum Part E Swivel)

Male Coupler X Hose Shank

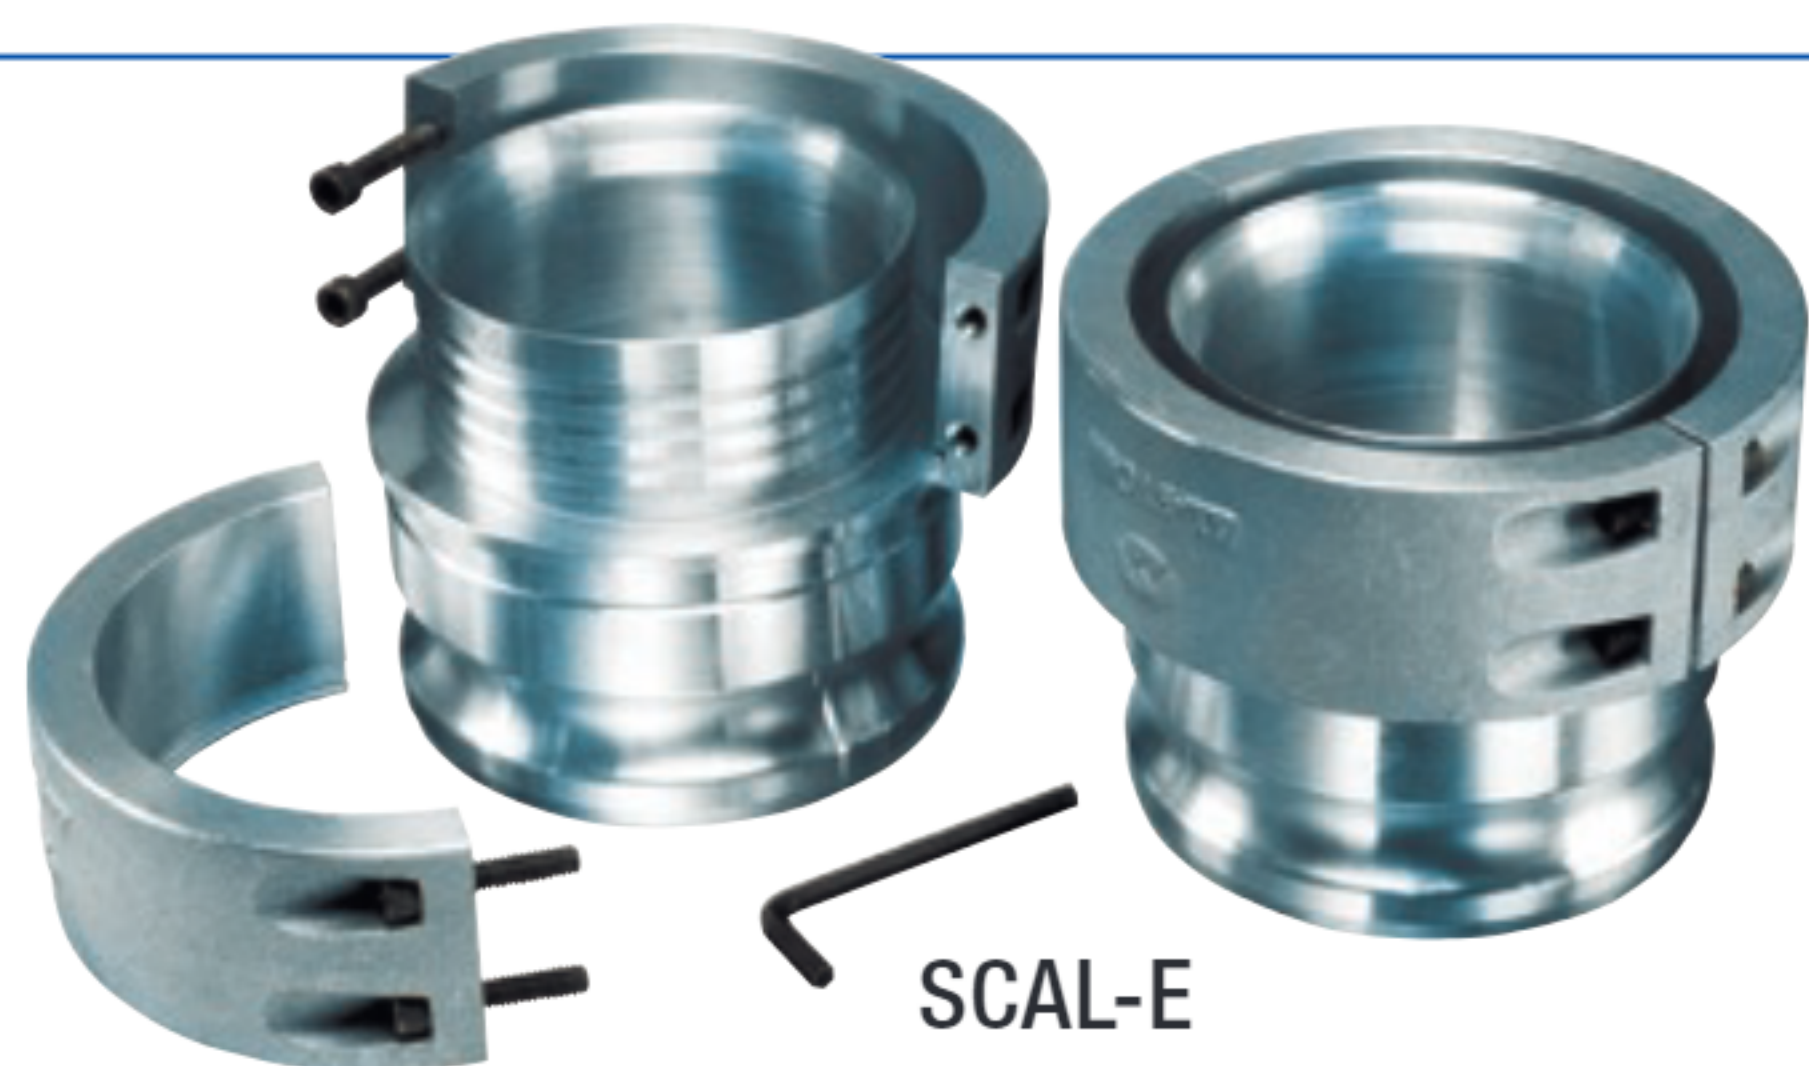

GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

FEATURES AND ADVANTAGES

- High quality design to withstand rigorous applications found in industrial markets.
- Nitrile gasket helps prevent product contamination.
- SCAL-C series supplied with forged brass handles which results in less wear on connecting parts.

MATERIAL SPECIFICATIONS

- ASTM aluminum alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- 304 stainless steel handle pins, pull rings, and safety clips.
- Buna-N gasket included.

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/SCAL


Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
SCAL-C400	4	72	B26 Grade 713	5.50	4
SCAL-E400	4	72	B26 Grade 713	3.20	4

Z-Lok™ Investment cast stainless steel LTW™ (Lifetime Warranty) handles.

Stainless steel ball bearings ensure smooth swivel action.



White Nitrile gasket helps prevent product contamination. See page 102 for the White Nitrile gasket.

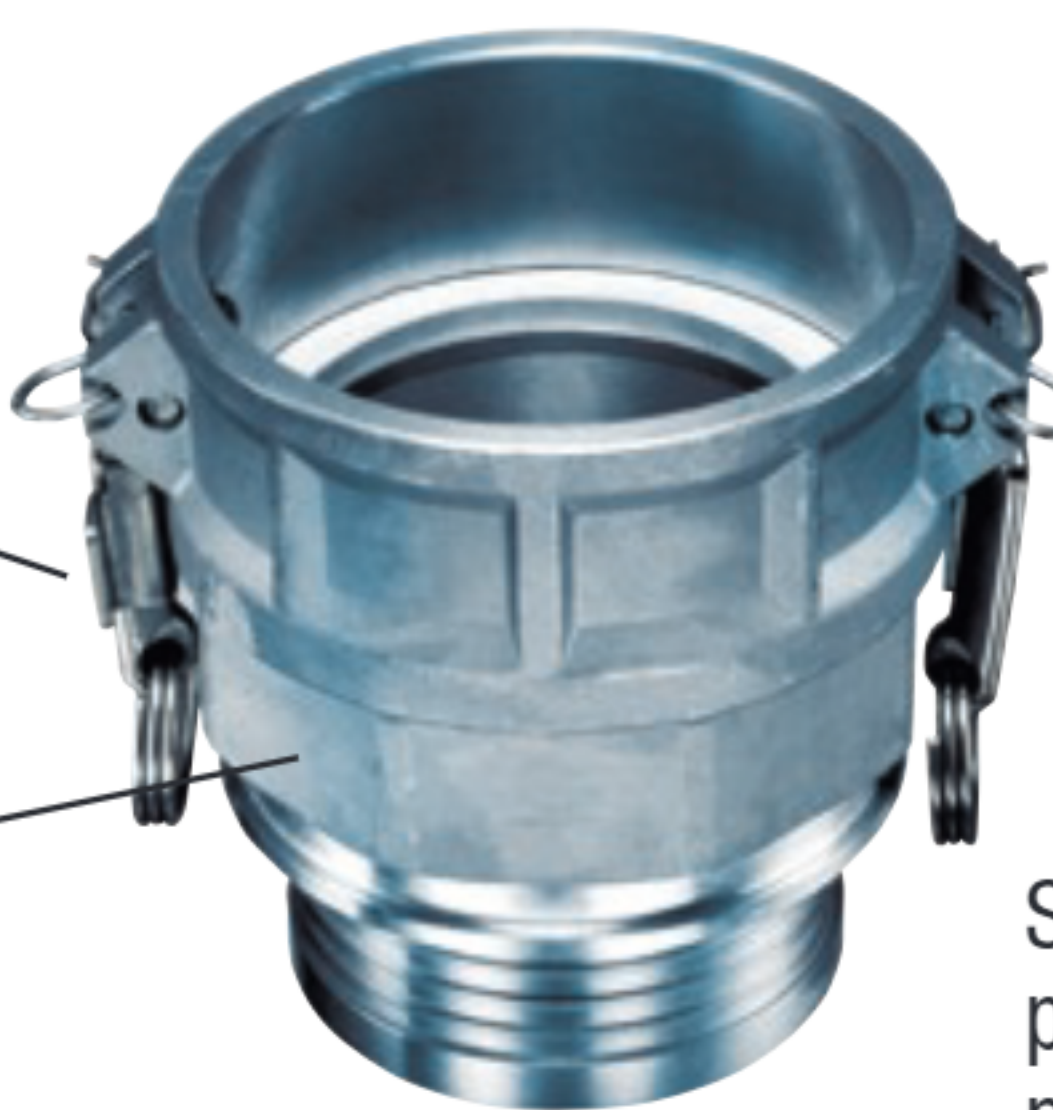

Safety clip provides positive locking.

New SmoothFlow™ tapered throat design provides full flow . . . reduces pressure drop and material build-up in hose.

SureSeal™ Aluminum Collar Clamp (included) provides positive seal . . . eliminates cutting of hose at shank end.

Note: Suggested for use with Tigerflex™ 4" ID hoses



Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.