




**Kuriyama of America, Inc.**  
 150 N MARTINGALE ROAD  
 SCHAUMBURG, IL 60173-5335 USA  
**Phone:** (847) 755-0360  
**Toll-Free FAX:** (800) 800-0320  
**International FAX:** (847) 885-0996 **Email:** [sales@kuriyama.com](mailto:sales@kuriyama.com)

## Endure™ 151 Series Reinforced Air Brake Tubing - Type B, Black

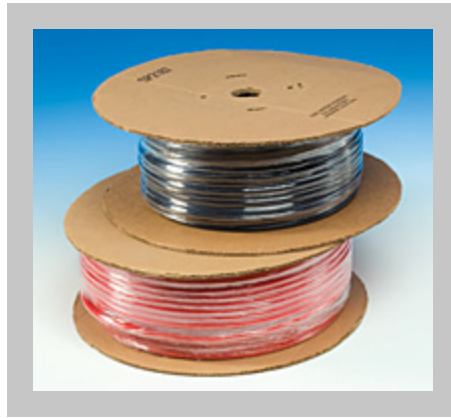

1

<u>Series Number</u>	<u>Size Code</u>	<u>Nominal OD</u>	<u>Nominal ID</u>	<u>Nominal Wall</u>	<u>Min. Burst Pressure at 70 °F (20 °C).</u>	<u>Min. Bend Radius at 70 °F (20 °C).</u>	<u>Standard Lengths (Spool)</u>	<u>Standard Lengths (Coil)</u>	<u>Package Weight (Spool)</u>	<u>P</u>
<u>151BK-06x500</u>	06	3/8 in	0.251 in	0.062 in	1400 psi	1.5 in	500 ft	N/A	17.0 lb	
<u>151BK-06x100</u>	06	3/8 in	0.251 in	0.062 in	1400 psi	1.5 in	N/A	100 ft	N/A	
<u>151BK-08x500</u>	08	1/2 in	0.376 in	0.062 in	950 psi	2.5 in	500 ft	N/A	23.0 lb	

<u>Series Number</u>	<u>Size Code</u>	<u>Nominal OD</u>	<u>Nominal ID</u>	<u>Nominal Wall</u>	<u>Min. Burst Pressure at 70 °F (20 °C).</u>	<u>Min. Bend Radius at 70 °F (20 °C).</u>	<u>Standard Lengths (Spool)</u>	<u>Standard Lengths (Coil)</u>	<u>Package Weight (Spool)</u>	<u>P</u>
<u>151BK-08x100</u>	08	1/2 in	0.376 in	0.062 in	950 psi	2.5 in	N/A	100 ft	N/A	
<u>151BK-10x250</u>	10	5/8 in	0.441 in	0.094 in	900 psi	3.0 in	250 ft	N/A	22.0 lb	
<u>151BK-10x100</u>	10	5/8 in	0.441 in	0.094 in	900 psi	3.0 in	N/A	100 ft	N/A	
<u>151BK-12x250</u>	12	3/4 in	0.566 in	0.094 in	850 psi	3.5 in	250 ft	N/A	27.0 lb	
<u>151BK-12x100</u>	12	3/4 in	0.566 in	0.094 in	850 psi	3.5 in	N/A	100 ft	N/A	