


## **ALFAGOMMA®** One-Piece AlfaCrimp Fittings – S Series



View Up To Date Info

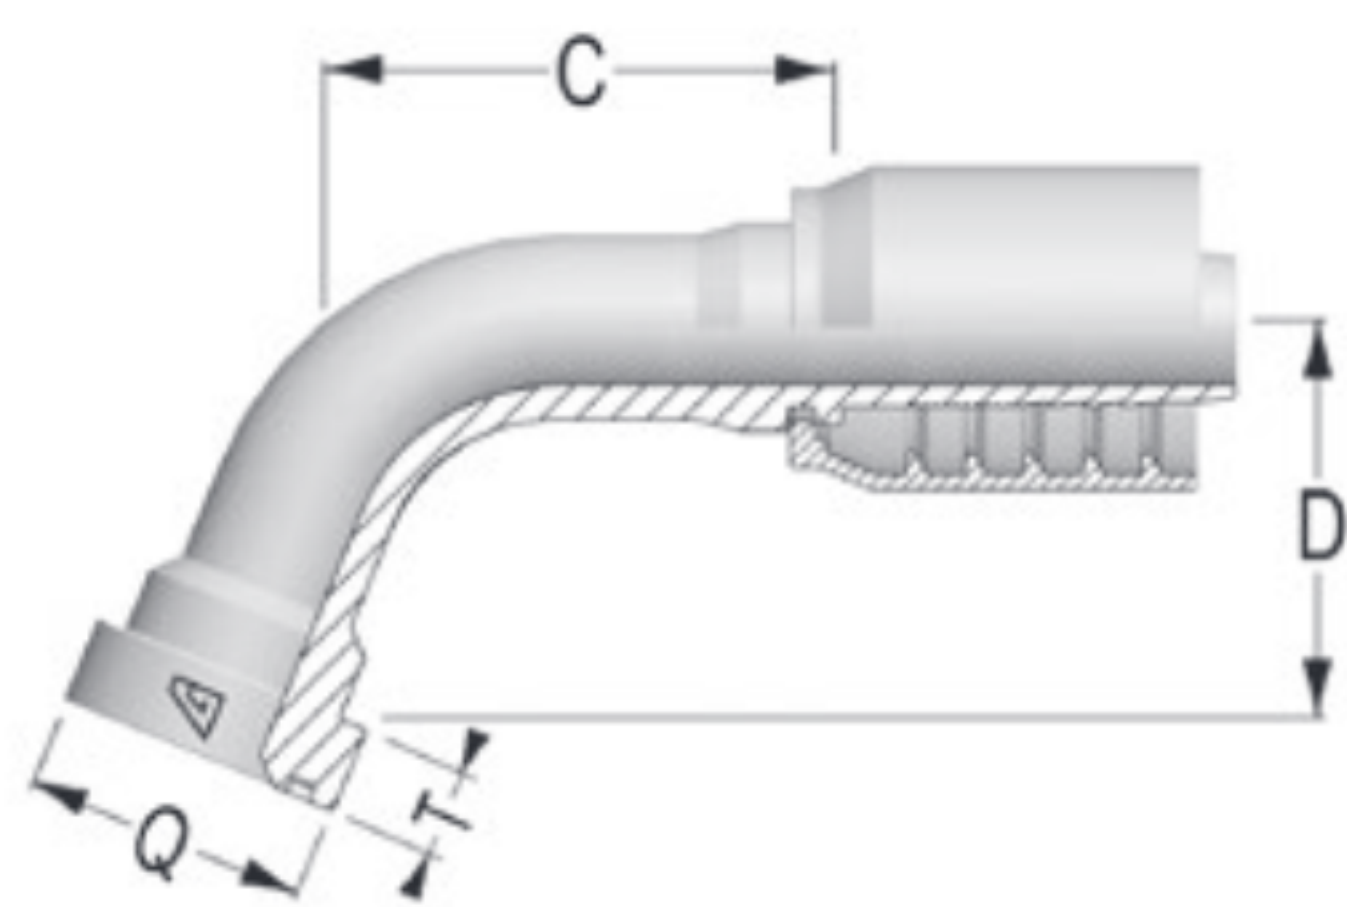


◀ SCAN OR VISIT  
[KOA.link/  
S-CFL6](https://KOA.link/S-CFL6)

### 60° SUPERCAT FLANGE

*\*Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	Q Flange (in)	Q Flange (mm)	C Cut-Off Factor (mm)	T Thickness (mm)	D Drop (mm)	Flange Dash Size	Weight (lbs/each)
S-1212-CFL6	12	3/4	19.0	1.63	41.3	92.6	14.3	46.0	12	1.36
S-1216-CFL6	12	3/4	19.0	1.88	47.6	95.6	14.3	48.5	16	1.55
S-1616-CFL6	16	1	25.4	1.88	47.6	116.0	14.3	59.0	16	1.99
S-1620-CFL6	16	1	25.4	2.13	54.0	116.0	14.3	57.0	20	2.18
S-2020-CFL6	20	1 1/4	31.8	2.13	54.0	135.0	14.3	65.0	20	3.57
S-2024-CFL6	20	1 1/4	31.8	2.50	63.5	141.0	14.3	67.5	24	3.65

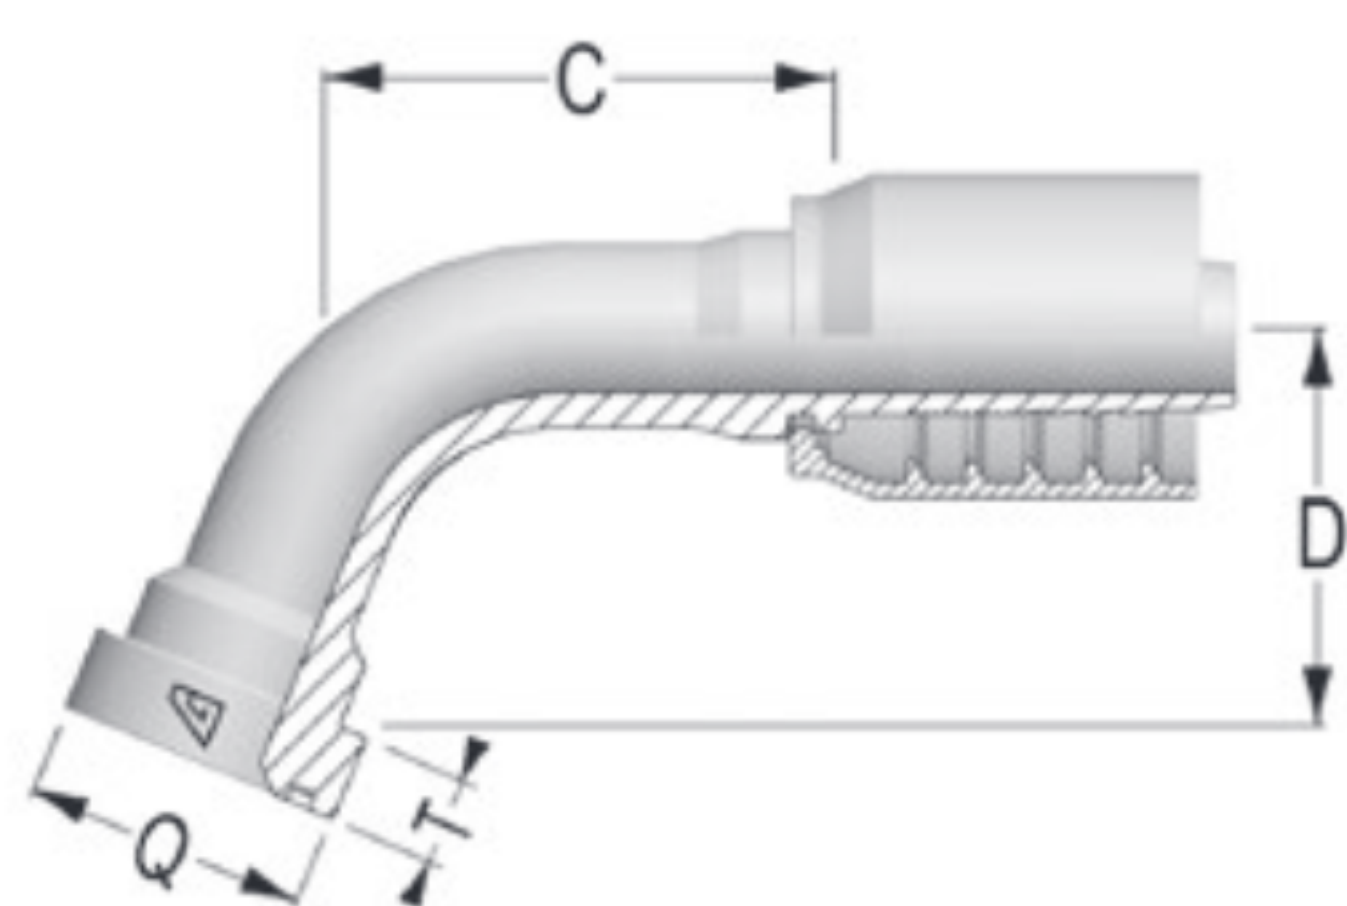

View Up To Date Info




◀ SCAN OR VISIT  
[KOA.link/  
S-CFL7](https://KOA.link/S-CFL7)

### 67.5° SUPERCAT FLANGE

*\*Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	Q Flange (in)	Q Flange (mm)	C Cut-Off Factor (mm)	T Thickness (mm)	D Drop (mm)	Flange Dash Size	Weight (lbs/each)
S-1212-CFL7	12	3/4	19.0	1.63	41.3	86.1	14.3	51.8	12	1.12
S-1216-CFL7	12	3/4	19.0	1.88	47.6	88.8	14.3	54.6	16	1.38
S-1616-CFL7	16	1	25.4	1.88	47.6	111.0	14.3	67.0	16	2.13
S-1620-CFL7	16	1	25.4	2.13	54.0	109.0	14.3	64.0	20	2.21
S-2020-CFL7	20	1 1/4	31.8	2.13	54.0	119.3	14.3	70.6	20	3.57
S-2024-CFL7	20	1 1/4	31.8	2.50	63.5	132.0	14.3	77.0	24	3.65

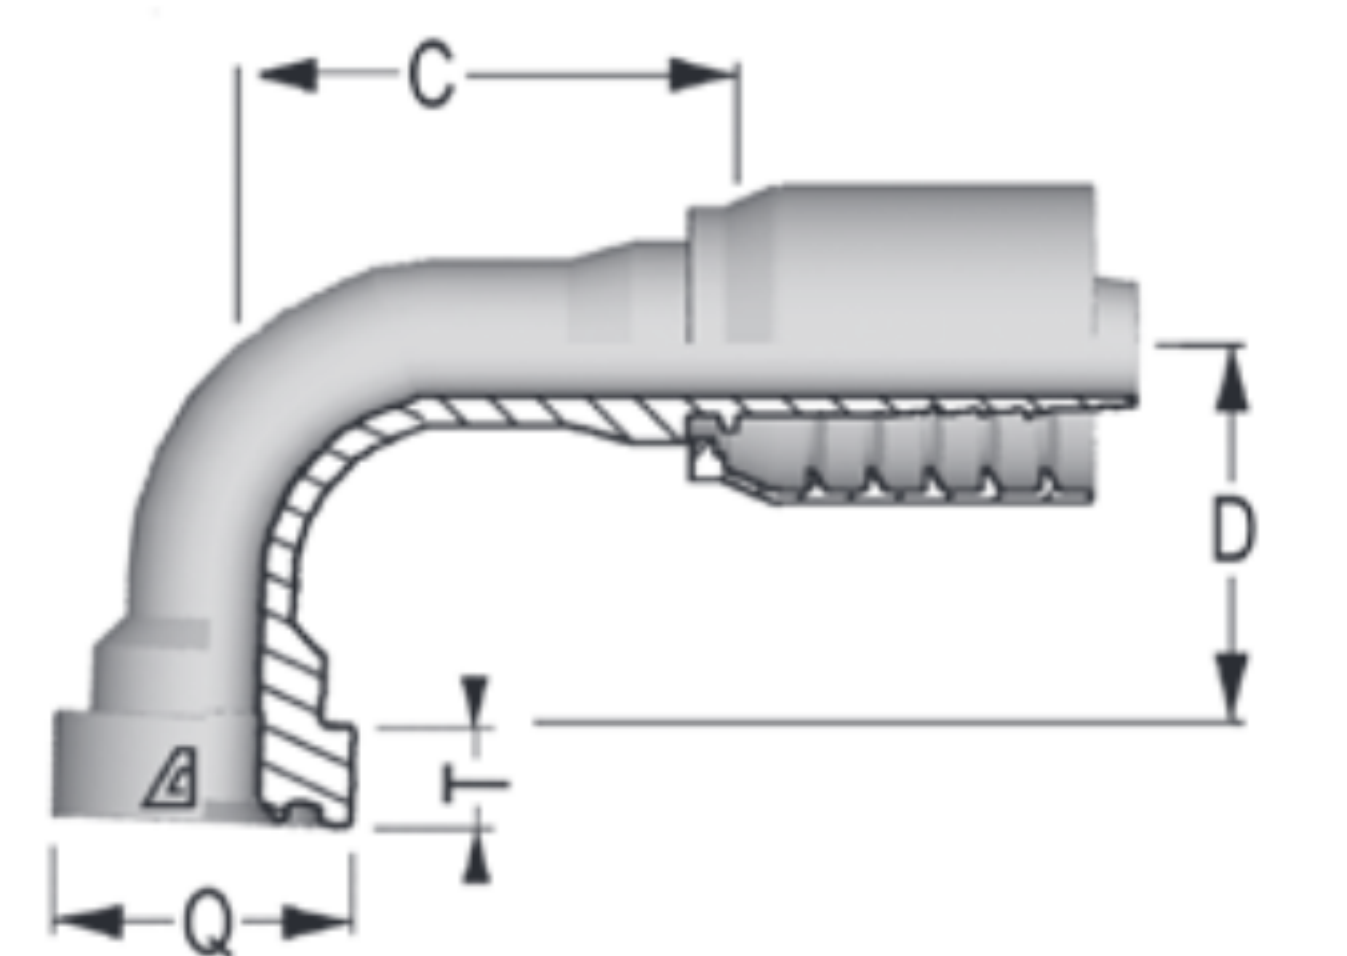

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
S-CFL9](https://KOA.link/S-CFL9)

### 90° SUPERCAT FLANGE

*\*Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	Q Flange (in)	Q Flange (mm)	C Cut-Off Factor (mm)	T Thickness (mm)	D Drop (mm)	Flange Dash Size	Weight (lbs/each)
S-1212-CFL9	12	3/4	19.0	1.63	41.3	67.0	14.3	67.0	12	1.20
S-1216-CFL9	12	3/4	19.0	1.88	47.6	69.0	14.3	70.0	16	1.40
S-1616-CFL9	16	1	25.4	1.88	47.6	85.0	14.3	79.0	16	1.99
S-1620-CFL9	16	1	25.4	2.13	54.0	80.0	14.3	82.5	20	2.18
S-2020-CFL9	20	1 1/4	31.8	2.13	54.0	96.0	14.3	93.0	20	2.98
S-2024-CFL9	20	1 1/4	31.8	2.50	63.5	97.0	14.3	101.0	24	3.41
S-2424-CFL9	24	1 1/2	38.1	2.50	63.5	117.0	14.3	109.0	24	4.01
S-3232-CFL9	32	2	50.8	3.12	79.4	141.0	14.3	138.5	32	5.25

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.