


Push-On Fittings

POFMIV Series

Male Inverted Flare Swivel x Push-On Barb

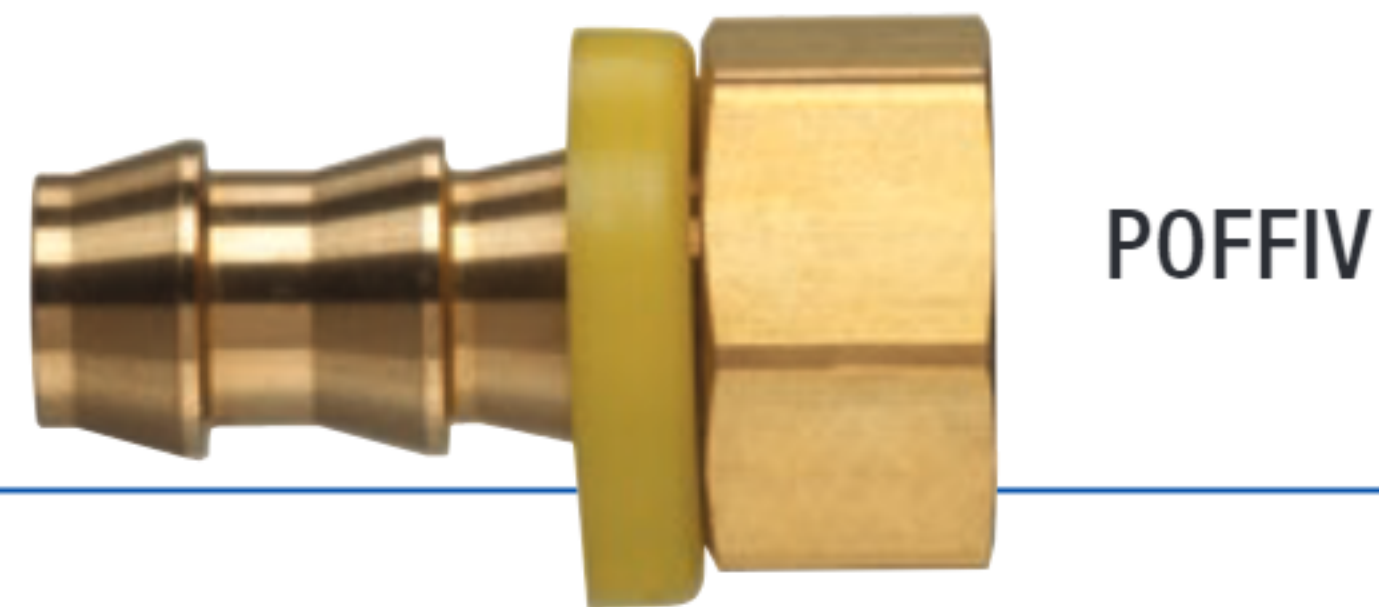

POFFIV Series

Female Inverted Flare Swivel x Push-On Barb

VIEW ONLINE



SCAN FOR INFO
or visit
[KOA.link/
POFMIV-POFFIV](https://KOA.link/POFMIV-POFFIV)

FEATURES AND ADVANTAGES

- Couplings designed specifically for use with push-on type hoses.
- Push-On fittings will lock on the hose without the use of clamps or ferrules.
- Applications include low-pressure air, fuel, water, oil, and lubrication lines.

MATERIAL SPECIFICATIONS

- Brass – ASTM B124, Grade C37700.

Part Number	Hose Size (in)	Fitting Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFMIV-0404	1/4	1/4	UNF	7/16 - 24	300	0.031	100
POFMIV-0405	1/4	5/16	UNF	1/2 - 20	300	0.037	100
POFMIV-0606	3/8	3/8	UNF	5/8 - 18	300	0.071	100
POFMIV-0808	1/2	1/2	UNF	3/4 - 16	300	0.106	50
POFMIV-1010	5/8	5/8	UNF	7/8 - 14	300	0.148	25

Part Number	Hose Size (in)	Fitting Size (in)	Thread Type	Thread (in-TPI)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
POFFIV-0404	1/4	1/4	UNF	7/16 - 24	300	0.024	100
POFFIV-0405	1/4	5/16	UNF	1/2 - 20	300	0.026	100
POFFIV-0606	3/8	3/8	UNF	5/8 - 18	300	0.053	50
POFFIV-0808	1/2	1/2	UNF	3/4 - 16	300	0.079	25

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.