


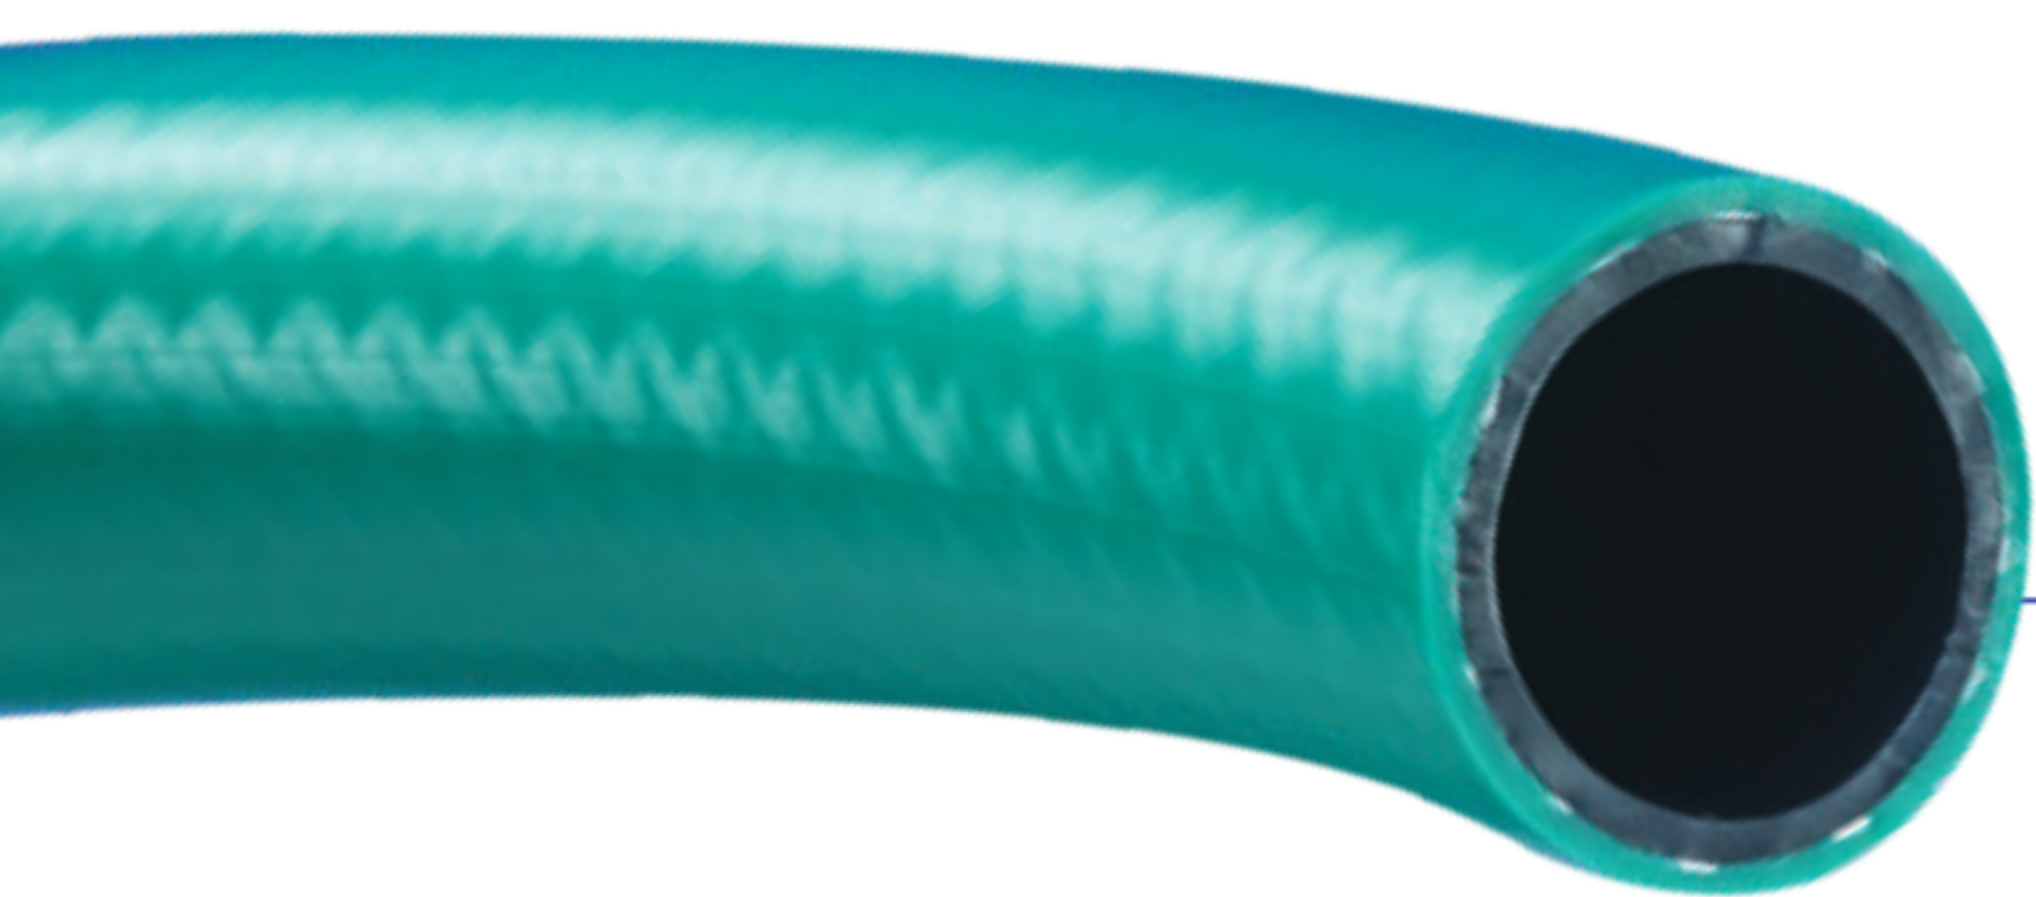

A1307 Series

Standard Duty PVC Water Hose

GENERAL APPLICATIONS

- Lawn and garden watering
- Light duty commercial washdown
- Light duty industrial watering
- Nursery water supply lines

CONSTRUCTION

- Tube – Black phthalate free PVC
- Reinforcement – High tensile strength yarn
- Cover – Opaque green phthalate free PVC

SERVICE TEMPERATURE RANGE

+25°F (-4°C) to +150°F (+65°C)

View Up To Date Info



◀ SCAN OR VISIT
[KOA.link/
A1307](https://KOA.link/A1307)



FEATURES AND ADVANTAGES

- **UV and Weather Resistant** – Opaque cover resists damage from UV light and weather aging.
- **Abrasion Resistant PVC** – Durable PVC holds up better than rubber water hoses when dragged.
- **Lightweight** – Lighter weight than rubber hoses, reduces worker fatigue.
- **Non-Marking Cover** – Can be dragged over flooring without leaving marks typical of rubber hoses.

Series Number	Size Code	ID		OD		Max. Working Pressure† (psi)		Standard Length (ft)	Weight per Pkg. (lbs)
		(in)	(mm)	(in)	(mm)	at 70°F (20°C)	at 122°F (50°C)		
A1307	10	5/8	15.9	0.817	20.8	125	50	300	40
A1307	12	3/4	19.1	0.972	24.7	100	40	300	53

NOTES:

† Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

COMPLIANCES (for details see page 91)
Phthalate Free [13]

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.