

NEW



ALFAMUFF Series

Field Replaceable Fixed Flange-Muff Coupling


GENERAL APPLICATIONS

Specially designed for use with the T719AA abrasive slurry hose.

FEATURES AND ADVANTAGES

- **Easy Assembly** – Two identical half shells connected with bolts (included) can be assembled in the field.*
- **Reduces Replacement Costs** – Re-usable and durable couplings since not in contact with transported abrasive materials.
- **Lightweight and Durable** – Aluminum lightweight-flanged connection system.
- **Compatibility** – Universal flanges with elliptical drilling patterns.

* Coupling complete with bolts, nuts and washers.

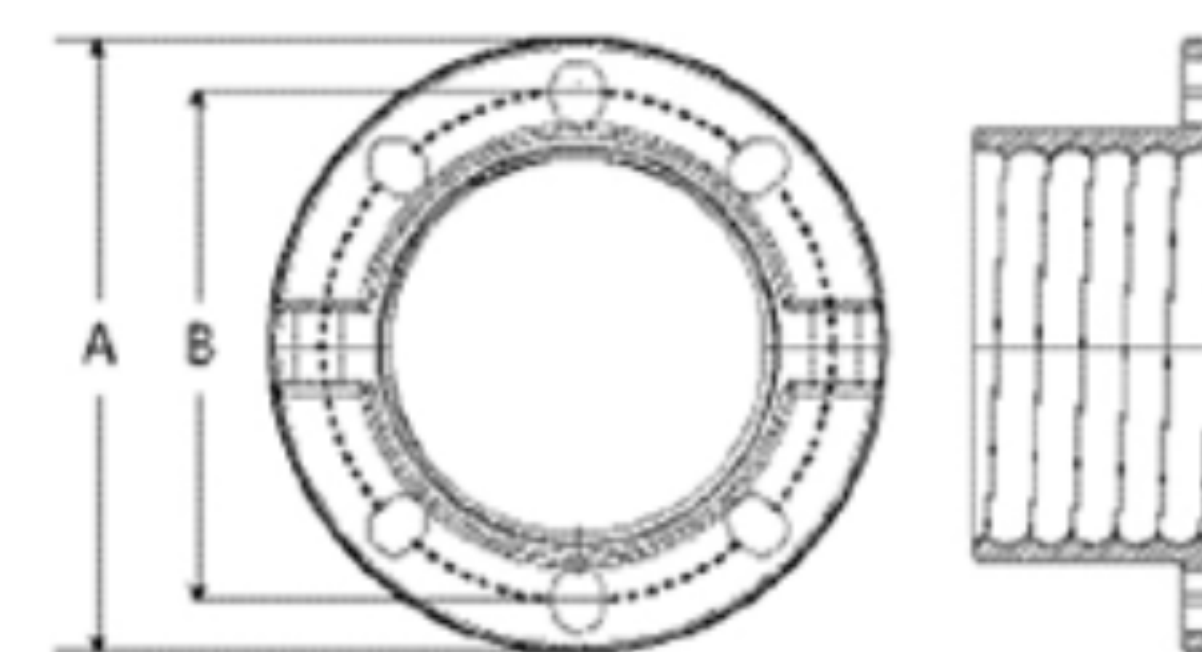

VIEW ONLINE




SCAN FOR INFO
or visit
KOA.link/ALFAMUFF

Part Number	ID		Length		Max. Rec. WP (psi)	Thread Type	Flange Compatibility	Flange Dimensions				Weight Each (lbs)
	(in)	(mm)	(in)	(mm)				A (in)	A (mm)	B (in)	B (mm)	
ALFAMUFF200	2	51	3.35	85	150	UNIV	PN10/ASA150/TAB.D-E	6.50	165	4.72	120	3.15
ALFAMUFF300	3	76	3.35	85	150	UNIV	PN10/ASA150/TAB.D-E	7.87	200	6.06	154	3.73
ALFAMUFF400	4	102	3.35	85	150	UNIV	PN10/ASA150/TAB.D-E	9.05	230	7.16	182	4.71
ALFAMUFF600	6	152	4.53	115	150	UNIV	PN10/ASA150/TAB.D-E	11.22	285	9.29	236	8.34
ALFAMUFF800	8	203	5.90	150	150	UNIV	PN10/ASA150/TAB.D-E	13.58	345	11.50	292	13.26
ALFAMUFF1000	10	254	6.89	175	150	UNIV	PN10/ASA150/TAB.E	15.94	405	13.90	353	21.06
ALFAMUFF1200	12	305	7.68	195	150	UNIV	PN10/ASA150/TAB.D-E	19.49	495	16.46	418	30.23

10" size compatible with table E only

AVAILABLE Q1 2024

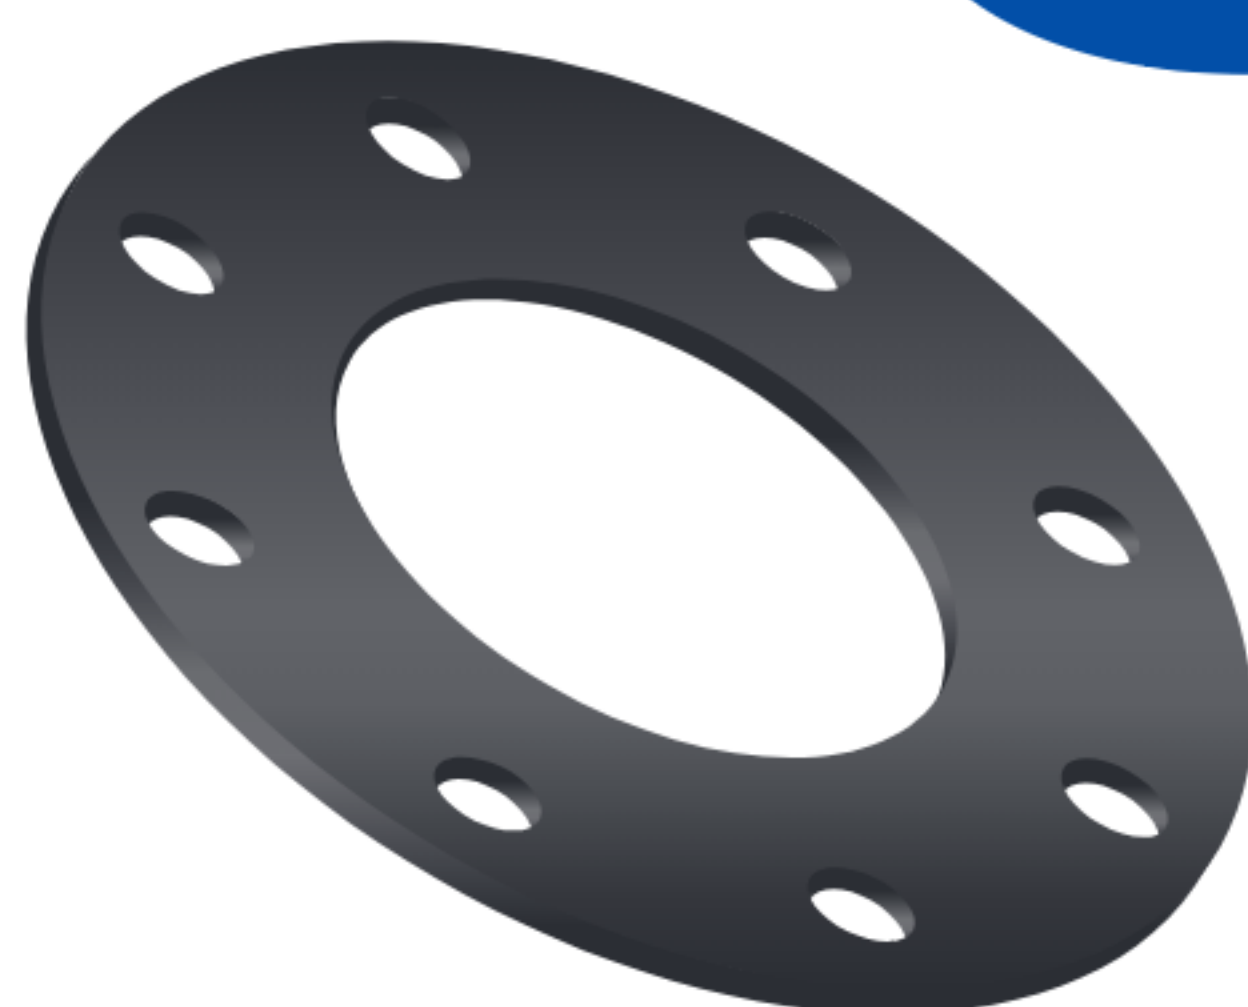

ALFASEAL Series

Flange Seal for Alfamuff Couplings

GENERAL APPLICATIONS

Black SBR flange seal with elliptical drilling patterns compatible with the Alfamuff couplings.

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/ALFASEAL

Part Number	ID		Thickness (mm)	Weight Each (lbs)	Part Number	ID		Thickness (mm)	Weight Each (lbs)
	(in)	(mm)				(in)	(mm)		
ALFASEAL200	2	51	8	0.37	ALFASEAL800	8	203	8	1.30
ALFASEAL300	3	76	8	0.54	ALFASEAL1000	10	254	8	1.60
ALFASEAL400	4	102	8	0.69	ALFASEAL1200	12	305	8	2.46
ALFASEAL600	6	152	8	0.95					

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.