


ALFAGOMMA® One-Piece AlfaCrimp Fittings – S Series

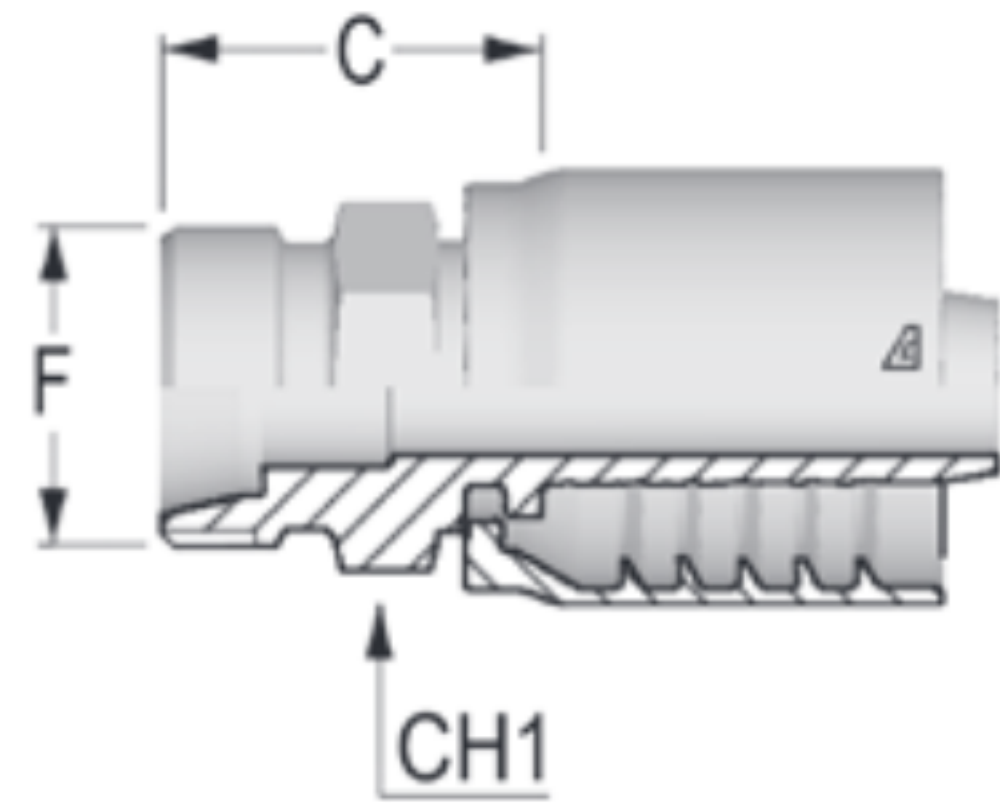

METRIC MALE 24° SEAT DIN 3853 LIGHT


**Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	F Thread Dash Size	F Thread Size (in) - TPI	Tube OD (mm)	C Cut-Off Factor (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
S-0616-MMSL	06	3/8	9.5	16	M16x1.5	10	23.3	17	0.18
S-0618-MMSL	06	3/8	9.5	18	M18x1.5	12	24.3	19	0.19
S-0622-MMSL	06	3/8	9.5	22	M22x1.5	15	25.3	22	0.22
S-0822-MMSL	08	1/2	12.7	22	M22x1.5	15	26.1	22	0.26
S-0826-MMSL	08	1/2	12.7	26	M26x1.5	18	27.1	27	0.33
S-1026-MMSL	10	5/8	15.9	26	M26x1.5	18	27.1	27	0.37
S-1230-MMSL	12	3/4	19.0	30	M30x2	22	31.6	32	0.50
S-1636-MMSL	16	1	25.4	36	M36x2	28	34.4	26	0.85
S-2045-MMSL	20	1 1/4	31.8	45	M45x2	35	40.0	46	1.29
S-2452-MMSL	24	1 1/2	38.1	52	M52x2	42	42.0	55	3.05

View Up To Date Info



← SCAN OR VISIT
**KOA.link/
S-MMSL**

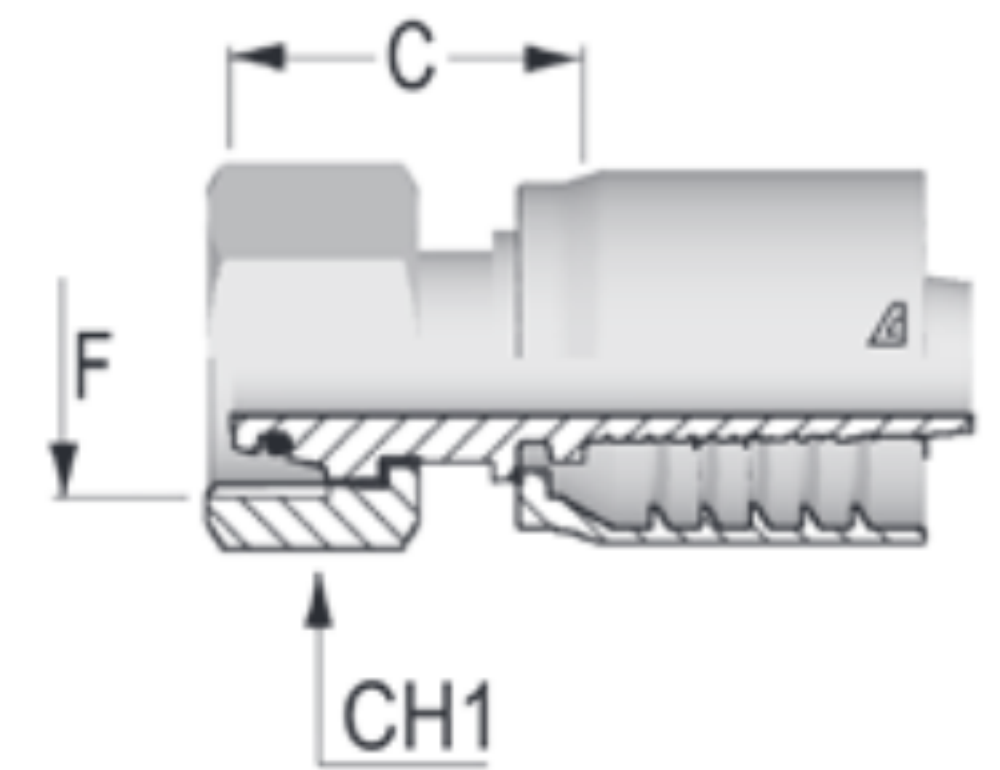

METRIC SWIVEL FEMALE 24° SEAT DIN 3853 LIGHT

**Preliminary Data*

Part Number	Dash Size	Hose ID Size (in)	Hose ID Size (mm)	F Thread Dash Size	F Thread Size (in) - TPI	Tube OD (mm)	C Cut-Off Factor (mm)	Hex Dia. CH1 (mm)	Weight (lbs/each)
S-0618-FMOL	06	3/8	9.5	18	M18x1.5	12	24.3	19	0.23
S-0822-FMOL	08	1/2	12.7	22	M22x1.5	15	26.1	22	0.32
S-1026-FMOL	10	5/8	15.9	26	M26x1.5	18	27.1	27	0.45
S-1230-FMOL	12	3/4	19.0	30	M30x2	22	31.6	32	0.76
S-1636-FMOL	16	1	25.4	36	M36x2	28	34.4	36	0.96
S-2045-FMOL	20	1 1/4	31.8	45	M45x2	35	40.0	46	1.38
S-2452-FMOL	24	1 1/2	38.1	52	M52x2	42	42.0	55	2.12

View Up To Date Info



← SCAN OR VISIT
**KOA.link/
S-FMOL**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.