


ALFAGOMMA® Two-Piece AlfaCrimp Fittings – Y Series



View Up To Date Info

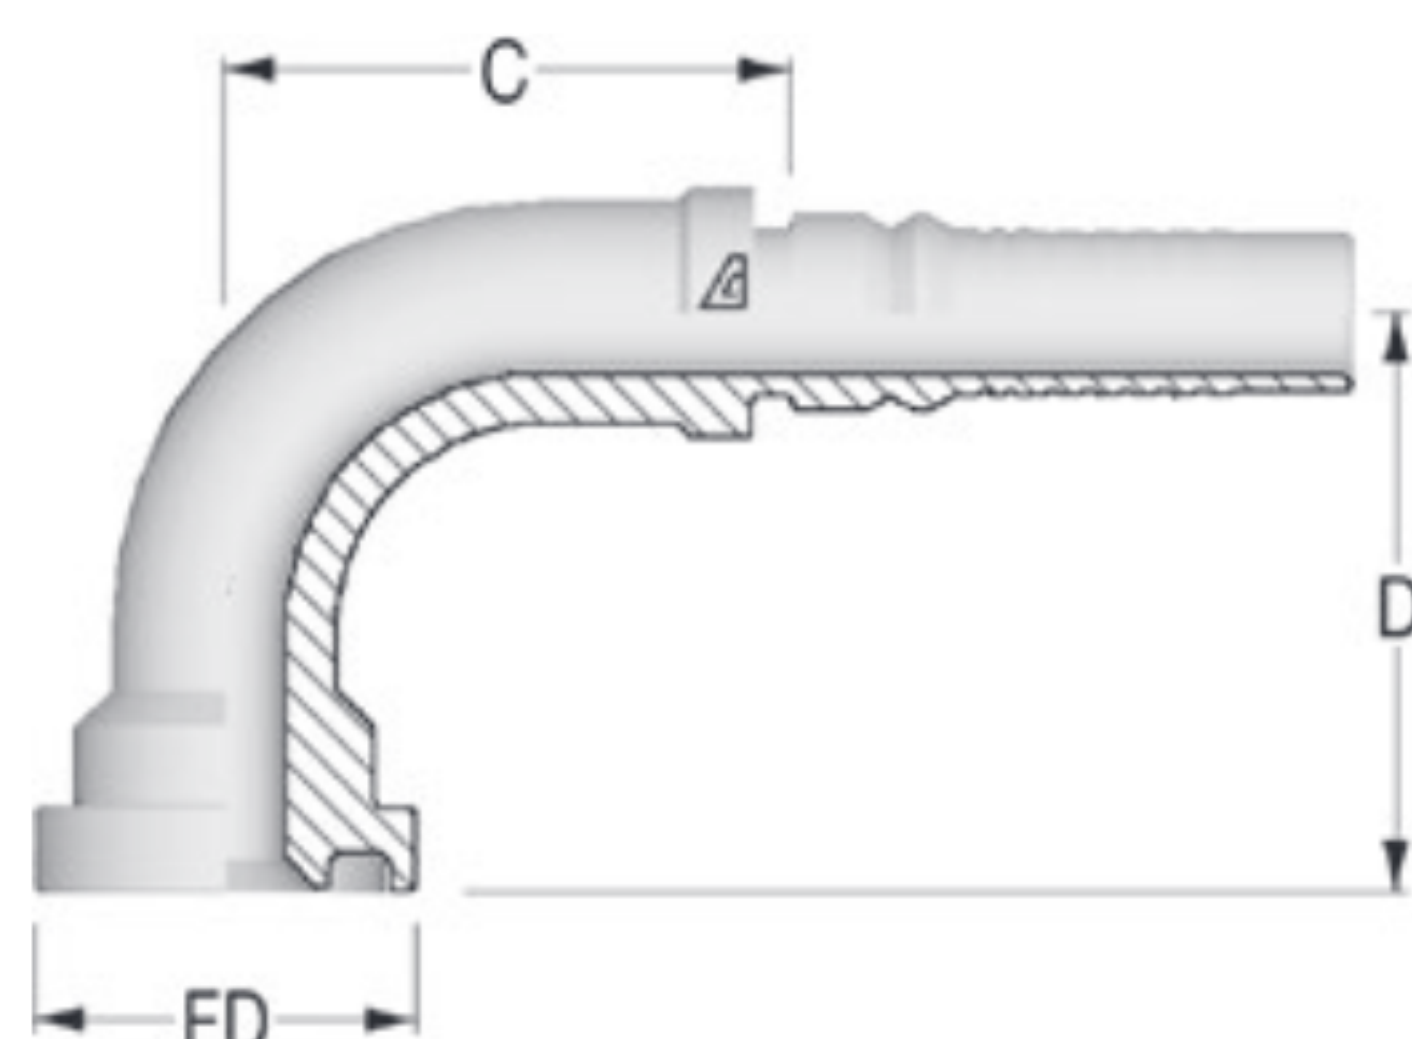


← SCAN OR VISIT
[KOA.link/
Y-C619](https://KOA.link/Y-C619)

90° O-RING FLANGE SAE J518 CODE 61 INTERLOCK

**Preliminary Data*

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	D Drop (mm)	Max Working Pressure (psi)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)				
Y-1212-C619	12	3/4	19.0	1.50	38.1	58.0	55	5000	0.74
Y-1616-C619	16	1	25.4	1.75	44.5	72.2	64	5000	1.06
Y-2020-C619	20	1 1/4	31.8	2.00	50.8	86.2	81	4000	1.61
Y-2424-C619	24	1 1/2	38.1	2.38	60.3	96.0	93	3000	2.35
Y-3232-C619	32	2	50.8	2.81	71.4	134.4	130	3000	4.72

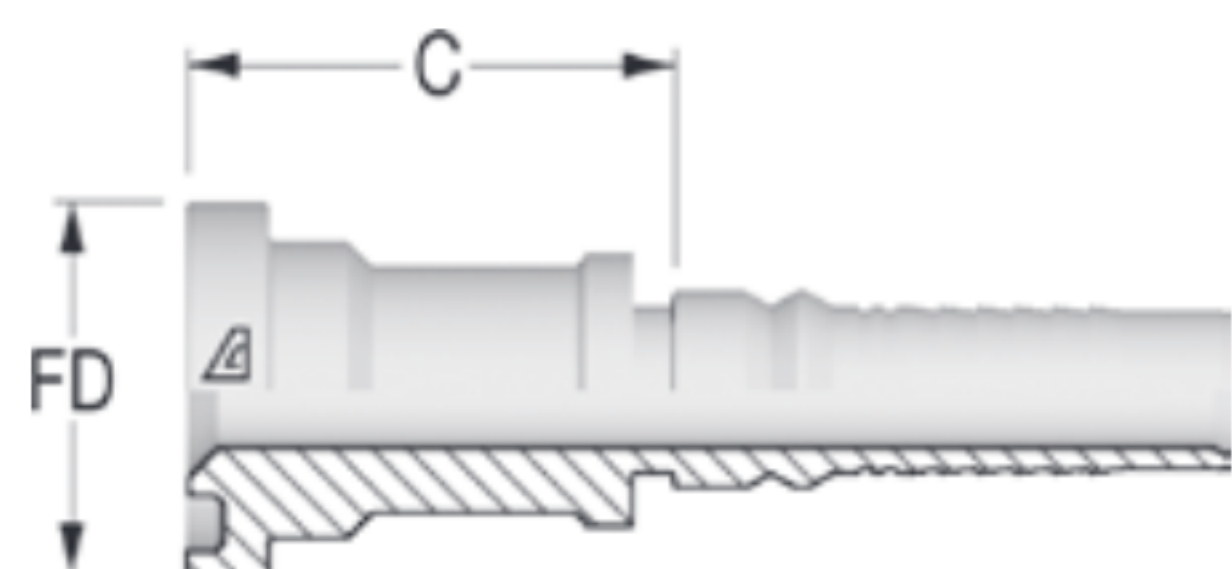

View Up To Date Info



← SCAN OR VISIT
[KOA.link/
Y-C62S](https://KOA.link/Y-C62S)

O-RING FLANGE SAE J518 CODE 62 INTERLOCK

Part Number	Dash Size	Hose ID Size		Q Flange		C Cut-Off Factor (mm)	Max Working Pressure (psi)	Weight (lbs/each)
		(in)	(mm)	(in)	(mm)			
Y-1212-C62S	12	3/4	19.0	1.63	41.3	50.0	6000	0.59
Y-1616-C62S	16	1	25.4	1.88	47.6	54.0	6000	0.91
Y-2020-C62S	20	1 1/4	31.8	2.13	54.0	62.2	6000	1.33
Y-2424-C62S	24	1 1/2	38.1	2.50	63.5	68.5	6000	2.01
Y-3232-C62S	32	2	50.8	3.13	79.4	87.0	6000	3.60

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.