
# Ground Joint COUPLINGS & ACCESSORIES



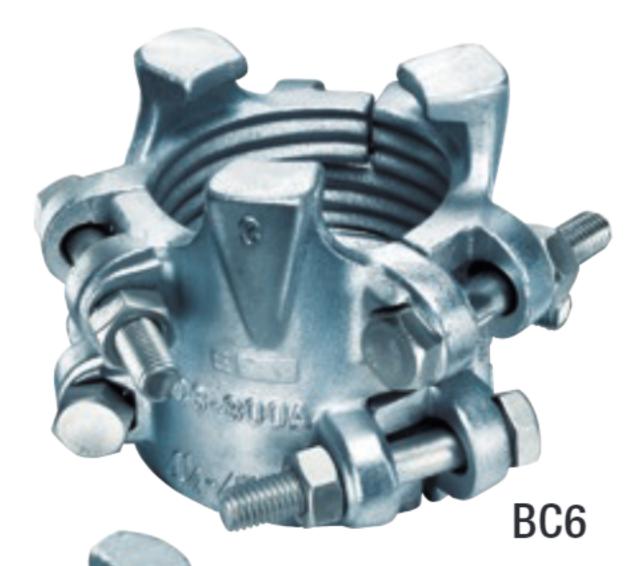


## **BC6 Series**

6-Bolt Interlocking Hose Clamp

### **BC2 Series**

2-Bolt Interlocking Hose Clamp

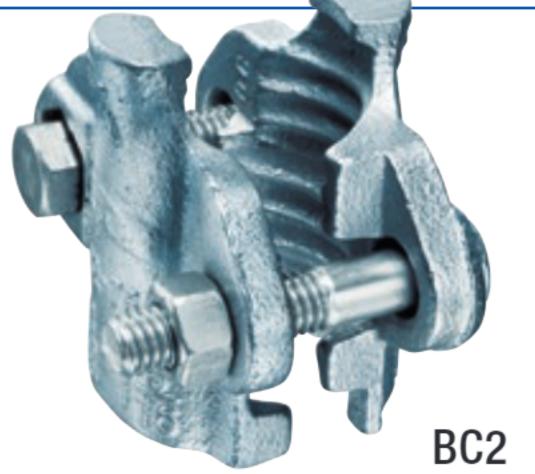

#### **FEATURES AND ADVANTAGES**

- Designed for use with ground joint couplings.
- Clamps are manufactured with a lip, which connects with the interlocking collar design found on the ground joint hose shank couplings.
- Clamps are available in 2, 4, and 6 bolt design, which is determined by the hose size.

#### **VIEW ONLINE** -



SCAN FOR INFO

or visit

KOA.link/BC

#### MATERIAL SPECIFICATIONS

- Ductile iron plated.
- ASTM A536, Grade 65/45/12.

#### MAXIMUM SERVICE TEMPERATURE

+450°F (+232°C)

Part Number	Hose ID Size (in)	Clamp Size Range (in)	Weight Each (lbs)	Maximum Torque (ft lbs)	Standard Carton
BC6-300A	3	4 1/4 - 4 13/16	12.32	150	4
BC6-400A	4	4 7/8 - 5 5/16	20.30	200	2
BC6-400B	4	5 1/8 - 6 3/16	21.45	200	2

Part Number	Hose ID Size (in)	Clamp Size Range (in)	Weight Each (lbs)	Maximum Torque (ft lbs)	Standard Carton
BC2-050	1/2	13/16 - 15/16	0.31	6	100
BC2-050A	1/2	15/16 - 1 1/16	0.44	12	100
BC2-050B	1/2	1 1/16 - 1 3/16	0.48	12	100
BC2-075	3/4	1 5/32 - 1 9/32	0.73	21	60
BC2-075A	3/4	1 3/16 - 1 5/16	0.79	21	60
BC2-075B	3/4	1 5/16 - 1 1/2	0.88	21	60
BC2-075C	3/4	1 1/2 - 1 11/16	1.15	21	40

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

